

350mA LED Drivers

Constant Current Drivers

LEDs use specific drivers to run them, they are different from normal low voltage fittings in that they must be wired in series and need a constant current. Drivers can be placed 10m from the LEDs. Longer distances of 10-40m can be achieved by using a larger diameter cable to reduce the volt drop, or taking one LED off the maximum the driver can run. Please contact us for more information.

Example fittings that use these drivers include: LD41-350, LD42-350, LD53-350, LD150-350, LD10236-350, LD26-350, LD36-350

Replaces TXDL20
TXDD350D

350mA Constant Current Drivers											
	Number of LEDs in each fitting	TXDS2	TXDL06CC350	TXDP12	TXDD350	TXDEL350D	TXDEL350DALI	TXDL36RGB	TXDEL4S350D	TXDEL4S350DALI	TXDEL4A350DMX TXDEL4A350DALI
		Arditi	GE Lightec	TCI	Mackwell/Harvard	EldoLED	EldoLED	ISTL	EldoLED	EldoLED	EldoLED
1.2W fittings	1 LED	1 - 3	1 - 4	1 - 12	3 - 14	1 - 14	1 - 14	42 (3 x 5-14) 5-13 RGB tri chips	56 (4 x 1-14)	56 (4 x 1-14)	56 (4 x 1-14) 2-13 RGB tri chips
3.6W (3x1.2W) fittings	3 LED	1	1	1 - 4	1 - 4	1 - 4	1 - 4	12 (3 x 2-4)	16 (4 x 1-4)	16 (4 x 1-4)	16 (4 x 1-4)
5W fittings	4 LED MKR	-	1	1 - 3	1 - 4	1 - 4	1 - 4	9 (3 x 1-3)	12 (4 x 1-3)	12 (4 x 1-3)	12 (4 x 1-3) 2-13 RGBW
7W fittings	6 LED Cluster	-	-	1 - 2	1 - 2	1 - 2	1 - 2	6 (3 x 1-2)	8 (4 x 1-2)	8 (4 x 1-2)	8 (4 x 1-2)
Number of outputs/circuits		1	1	1	1	1	1	3 Individually addressable	4	4	4 Individually addressable
Dimmable		no	no	no	no	0 - 10V (1-100%)*	DALI (0-100%)*	DMX (0-100%)*	1-10V (0-100%)*	DALI (0-100%)*	DMX, DALI (0-100%)*
Output Current (mA)		350mA	350mA	350mA	350mA	350mA	350mA	350mA	350mA	350mA	350mA
Output Voltage (V)		3 - 12V	2 - 20V	43V	9 - 48V	2 - 55V	2 - 55V	14 - 48V per channel	2 - 57V per channel	2 - 57V per channel	2 - 57V per channel
Output Wattage (W)		6W	6W	15W	33W	30W	30W	50W	100W	100W	100W
Dimensions L x W x H (mm)		42 x 40 x 21	45 x 60 x 25	115 x 34 x 19	186 x 33 x 32	210 x 41 x 34	210 x 41 x 34	240(285) x 95 x 60	388 x 42 x 30	388 x 42 x 30	388 x 42 x 30
Hole Cut - out (mm)		44Ø	51Ø	40Ø	45Ø	51Ø	51Ø	N/A	N/A	N/A	N/A
IP Rated		N/A	IP67 as standard	250 x 50Ø IP67 Tube	Supplied in IP rated box	Supplied in IP rated box	Supplied in IP rated box	Supplied in IP rated box	N/A	N/A	N/A


NB: (number of circuits) x (number of LEDs) * Dimming range can vary depending on the manufacturer and type of control system used

RGB LED note:

Green and blue LEDs have a maximum forward voltage of 3.8V (white is max 3.2V at 350mA). So take off 1 LED of the total the driver can run. TXDL36RGB and TXDEL4A350 drivers list the amount of RGB and RGBW LEDs they can run.

Wiring in series

LEDs need to be connected with an 'in series' wiring method required.



500mA LED Drivers

Constant Current Drivers

Driver sheet - Page 2

LEDs use specific drivers to run them, they are different from normal low voltage fittings in that they must be wired in series and need a constant current. Drivers can be placed 10m from the LEDs. Longer distances of 10-40m can be achieved by using a larger diameter cable to reduce the volt drop, or taking one LED off the maximum the driver can run. Please contact us for more information.

Example fittings that use these drivers include: LD42-500, LD1030-500, LD36-500, LD26-500

Replaces TXDL20/500
TXDD500D


500mA Constant Current Drivers									
Number of LEDs in each fitting		TXDL06CC500	TXDL12CC500	TXDD500	TXDEL500D	TXDEL500DALI	TXDEL4S500D	TXDEL4S500DALI	TXDEL4A500DMX TXDEL4A500DALI
		GE Lightec	GE Lightec	Mackwell/Harvard	EldoLED	EldoLED	EldoLED	EldoLED	EldoLED
1.7W fittings	1 LED	1 - 3	1 - 8	3 - 14	1 - 14	1 - 14	56 (4 x 1-14)	56 (4 x 1-14)	56 (4 x 1-14)
5.1W (3x1.7W) fittings	3 LED	1	1 - 2	1 - 4	1 - 4	1 - 4	16 (4 x 1-4)	16 (4 x 1-4)	16 (4 x 1-4)
7W fittings	4 LED MKR	1	1	1 - 4	1 - 4	1 - 4	12 (4 x 1-3)	12 (4 x 1-3)	12 (4 x 1-3) 2-13 RGBW
10W fittings	6 LED Cluster	-	1	1 - 2	1 - 2	1 - 2	8 (4 x 1-2)	8 (4 x 1-2)	8 (4 x 1-2)
Number of outputs/circuits		1	1	1	1	1	4	4	4 individually addressable
Dimmable		no	no	no	0 - 10V (1-100%)*	DALI (0-100%)*	1-10V (0-100%)*	DALI (0-100%)*	DMX, DALI (0-100%)*
Output Current (mA)		500mA	500mA	500mA	500mA	500mA	500mA	500mA	500mA
Output Voltage (V)		2 - 14V	2 - 26V	9 - 48V	2 - 55V	2 - 55V	2 - 50V per channel	2 - 50V per channel	2 - 50V per channel
Output Wattage (W)		6W	12W	33W	30W	30W	100W	100W	100W
Dimensions L x W x H (mm)		45 x 60 x 25	100 x 40 x 28	186 x 33 x 32	210 x 41 x 34	210 x 41 x 34	388 x 42 x 30	388 x 42 x 30	388 x 42 x 30
Hole Cut - out (mm)		51Ø	48Ø	45Ø	51Ø	51Ø	N/A	N/A	N/A
IP Rated		IP67 as standard	Supplied in IP rated box	Supplied in IP rated box	Supplied in IP rated box	Supplied in IP rated box	N/A	N/A	N/A

NB: (number of circuits) x (number of LEDs)

* Dimming range can vary depending on the manufacturer and type of control system used

Wiring in series

LEDs need to be connected with an 'in series' wiring method required.

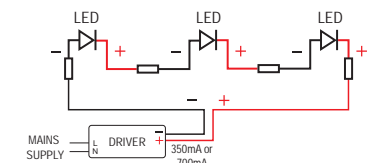

700mA LED Drivers

Constant Current Drivers

Driver sheet - Page 3

LEDs use specific drivers to run them, they are different from normal low voltage fittings in that they must be wired in series and need a constant current. Drivers can be placed 10m from the LEDs. Longer distances of 10-40m can be achieved by using a larger diameter cable to reduce the volt drop, or taking one LED off the maximum the driver can run. Please contact us for more information.

Example fittings that use these drivers include: LD56-700, LD1250-700, LD51-700, LD38-700

Replaces TXDL20700
TXDD700D


700mA Constant Current Drivers									
Number of LEDs in each fitting		TXDS2/700	TXDP17	TXDD700	TXDEL700D	TXDEL700DALI	TXDEL4S700D	TXDEL4S700DALI	TXDEL4A700DMX TXDEL4A700DALI
		Arditi	Arditi	Mackwell/Harvard	EldoLED	EldoLED	EldoLED	EldoLED	EldoLED
2.4W fittings	1 LED	1 - 2	1 - 6	3 - 14	1 - 13	1 - 13	40 (4 x 1-10)	40 (4 x 1-10)	40 (4 x 1-10)
10W fittings	4 LED MKR	-	1	1 - 3	1 - 3	1 - 3	8 (4 x 1-2)	8 (4 x 1-2)	8 (4 x 1-2)
14W fittings	6 LED Cluster	-	1	1 - 2	1 - 2	1 - 2	4 (4 x 1)	4 (4 x 1)	4 (4 x 1)
Number of outputs/circuits		1	1	1	1	1	4	4	4 individually addressable
Dimmable		no	no	no	0 - 10V (1-100%)*	DALI (0-100%)*	1-10V (0-100%)*	DALI (0-100%)*	DMX, DALI (0-100%)*
Output Current (mA)		700mA	700mA	700mA	700mA	700mA	700mA	700mA	700mA
Output Voltage (V)		3 - 8.5V	3 - 24V	9 - 48V	2 - 42V	2 - 42V	2 - 35.7V	2 - 35.7V	2 - 35.7V
Output Wattage (W)		6W	17W	33W	30W	30W	100W	100W	100W
Dimensions L x W x H (mm)		42 x 40 x 21	125 x 38 x 22	186 x 33 x 32	210 x 41 x 34	210 x 41 x 34	388 x 42 x 30	388 x 42 x 30	388 x 42 x 30
Hole Cut - out (mm)		44Ø	43Ø	45Ø	51Ø	51Ø	N/A	N/A	N/A
IP Rated		N/A	250 x 50Ø IP67 Tube	Supplied in IP rated box	Supplied in IP rated box	Supplied in IP rated box	N/A	N/A	N/A

NB: (number of circuits) x (number of LEDs)

* Dimming range can vary depending on the manufacturer and type of control system used

Wiring in series

LEDs need to be connected with an 'in series' wiring method required.

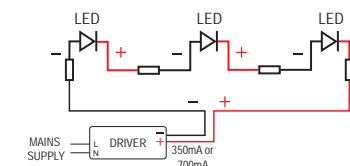



350 - 700mA Phase/Mains Dimmable LED Drivers


Constant Current Drivers

Driver sheet - Page 4

Phase/mains dimmable drivers must always be specified with care as there are many factors that can effect how well they dim. If possible on a project it is best to use mains dimmable drivers from the same manufacturer, especially if they are on the same room or circuit. Drivers can be placed 10m from the LEDs. Longer distances of 10-40m can be achieved by using a larger diameter cable to reduce the volt drop, or taking one LED off the maximum the driver can run. Please contact us for more information.

350mA Constant Current Drivers			
		TXDLDIMTE (Lumotech)	TXDM350PHD (Mode)
Number of LEDs in each fitting			
1.2W fittings	1 LED	1 - 9	4 - 14
3.6W (3x1.2W) fittings	3 LED	1 - 3	2 - 4
5W fittings	4 LED MKR	1 - 2	1 - 3
7W fittings	6 LED Cluster	1	1 - 2
Number of outputs/circuits		1	1
Dimmable		240V trailing edge (min 20%)*	240V trailing/leading edge
Output Current (mA)		350mA	350mA
Output Voltage (V)		32V	12 - 48V
Dimensions LxWxH (mm)		99 x 39 x 23	150 x 49 x 35
Hole Cut - out (mm)		42Ø	50Ø
IP Rated		Supplied in IP rated box	Supplied in IP rated box

500mA Constant Current Drivers			
		TXDL26CC500 (GE/Lightec)	TXDM500PHD (Mode)
Number of LEDs in each fitting			
1.7W fittings	1 LED	2 - 14	4 - 11
5.1W (3x1.7W) fittings	3 LED	1 - 4	2 - 3
7W fittings	4 LED MKR	1 - 3	1 - 2
10W fittings	6 LED	1 - 2	1
Number of outputs/circuits		1	1
Dimmable		240V Trailing Edge (min 25%)*	240V trailing/leading edge
Output Current (mA)		500mA	500mA
Output Voltage (V)		4 - 52V	12 - 36V
Dimensions LxWxH (mm)		153 x 40 x 31	150 x 49 x 35
Hole Cut - out (mm)		50Ø	50Ø
IP Rated		Supplied in IP rated box	Supplied in IP rated box

700mA Constant Current Drivers			
		TXDLDIMTE/700 (Lumotech)	TXDM700PHD2 (Mode)
Number of LEDs in each fitting			
2.4W fittings	1 LED	1 - 4	4 - 14
10W fittings	4 LED MKR	1	1 - 3
14W fittings	6 LED	1	1 - 2
Number of outputs/circuits		1	1
Dimmable		240V trailing edge (min 20%)*	240V trailing/leading edge
Output Current (mA)		700mA	700mA
Output Voltage (V)		18V	12 - 48V
Dimensions LxWxH (mm)		99 x 39 x 23	224 x 58 x 42
Hole Cut - out (mm)		42Ø	70Ø
IP Rated		Supplied in IP rated box	Supplied in IP rated box



The TXDM350PHD, TXDM500PHD and TXDM700PHD2 have been tested with a Lutron Graphic Eye system and this combination works well, smooth dimming down to around 5%. These also work well with Mode dimming systems as these drivers are made by them.



350mA - 700mA LED Drivers (24V Input)



Constant Current Drivers

Driver sheet - Page 5

These drivers require a 24V input and provide an output of either 350mA, 500mA or 700mA constant current supply. This makes them particularly useful for boat applications where there is only a 24V supply. The drivers can dimmed using a pulse width modulation signal (PWM) from a TXDO DIM controller (see 24V LED driver section).

350mA 24V Input			
Number of LEDs in each fitting		TXDT24V350	TXDT24V350IP68
1.2W fittings	1 LED	1 - 6	1 - 6
3.6W (3x1.2W) fittings	3 LED	1 - 2	1 - 2
5W fittings	4 LED Cree MKR	1	1
7W fittings	6 LED Cluster	1	1
Number of outputs/circuits		1	1
Dimmable		PWM (TXDO-DIM, 1-10V, DALI, DMX)	PWM (TXDO-DIM, 1-10V, DALI, DMX)
Output Current (mA)		350mA	350mA
Output Voltage (V)		20V	20V
Dimensions L x W x H (mm)		58 x 31 x 21	57 x 34 x 22
Hole Cut - out (mm)		38Ø	35Ø
IP Rating		-	IP68

500mA 24V Input			
Number of LEDs in each fitting		TXDT24V500	TXDT24V500IP68
1.7W fittings	1 LED	1 - 6	1 - 6
5.1W (3x1.7W) fittings	3 LED	1 - 2	1 - 2
7W fittings	4 LED Cree MKR	1	1
10W fittings	6 LED Cluster	1	1
Number of outputs/circuits		1	1
Dimmable		PWM (TXDO-DIM, 1-10V, DALI, DMX)	PWM (TXDO-DIM, 1-10V, DALI, DMX)
Output Current (mA)		500mA	500mA
Output Voltage (V)		20V	20V
Dimensions L x W x H (mm)		58 x 31 x 21	57 x 34 x 22
Hole Cut - out (mm)		38Ø	35Ø
IP Rating		-	IP68

700mA 24V Input			
Number of LEDs in each fitting		TXDT24V700	TXDT24V700IP68
2.4W fittings	1 LED	1 - 6	1 - 6
10W fittings	4 LED Cree MKR	1	1
14W fittings	6 LED Cluster	1	1
Number of outputs/circuits		1	1
Dimmable		PWM (TXDO-DIM, 1-10V, DALI, DMX)	PWM (TXDO-DIM, 1-10V, DALI, DMX)
Output Current (mA)		700mA	700mA
Output Voltage (V)		20V	20V
Dimensions L x W x H (mm)		58 x 31 x 21	57 x 34 x 22
Hole Cut - out (mm)		38Ø	35Ø
IP Rating		-	IP68

* for an even smaller non IP rated option the driver can be supplied without its potted housing

Wiring in series

