

24V LED Drivers

Constant Voltage Drivers

LEDs using these drivers require a 24V DC constant voltage input with a parallel wiring method. Max 10m.


Example fittings that use these drivers include: LD Picture Light, LD Flexi, LD11, LD Line 15, LD22

24V Constant Voltage Drivers						
	TXDA24008	TXDL24020DIM	TXDO24020	TXDO24075	TXDL24150	TXDL24200
Output Power (W)	8W	20W	20W	75W	150W	200W
Dimmable	use with Dimming Controller	use with Dimming Controller	use with Dimming Controller	use with Dimming Controller	use with Dimming Controller	use with Dimming Controller
Output Voltage (V)	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
Dimensions L x W x H (mm)	69 x 35 x 21	110 x 52 x 24	109 x 50 x 35	220 x 46.2 x 43.6	300 x 65 x 42	300 x 65 x 42
IP Rating	Drivers can be supplied in an IP rated box for use in wet environments.					

24V Dimming Controllers						
	TXDO-DIM	TXDO-DIM DALI	TXDO-DIM RGB	TXDO-DIM RGB DMX	TXDEL-DIM	TXDEL-DIM DALI
Output Power (W)	0 - 120W	0 - 120W	3 x 48W	3 x 48W	192W	192W
Dimmable	1 - 10V (0 - 100%)	DALI (0 - 100%)	1 - 10V (0 - 100%)	DMX (0 - 100%)	0-10V (0-100%)	DALI (0-100%)
Output Voltage (V)	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
Dimensions L x W x H (mm)	172 x 42 x 20	172 x 42 x 20	172 x 42 x 20	172 x 42 x 20	153 x 50 x 23	153 x 50 x 23
IP Rating	Dimming controllers can be supplied in an IP rated box for use in wet environments.					


Non Dimming Wiring Diagrams

LED modules are wired to the driver using a parallel wiring method

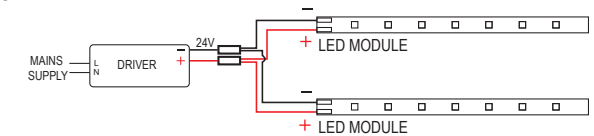


Dimming Wiring Diagrams

1-10V or DALI dimming for single colour modules

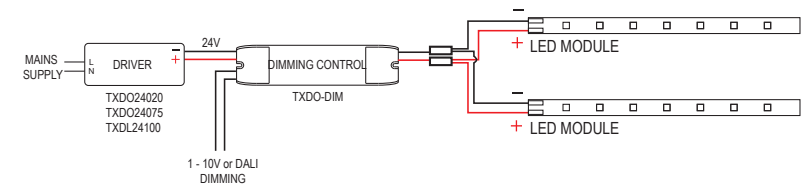

1-10V dimming for RGB modules with a TXDO-DIM RGB controller

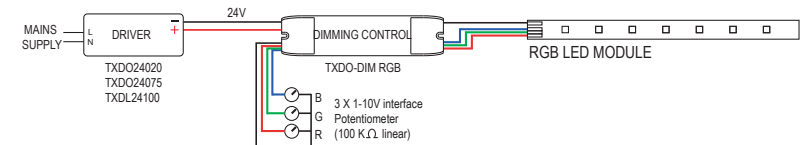

DMX dimming for RGB or single colour LED modules with a TXDO-DIM RGB DMX controller

