

LD71M



Miniature Adjustable Low Glare LED Downlight

Data sheet - Page 1

LD71M is a miniature adjustable LED downlight, ideal for display, niches or general downlighting effects. It is very discreet with the LED set back by 10mm to reduce the glare, with a maximum tilt of 25°. It utilizes the latest LED technology with a typical CRI of 93 in warm white. IP40 as standard, but can be specified IP54 for bathrooms or wet environments.

Key Features

- Very minimal depth and bezel diameter
- Adjustable with a 25° tilt
- High power for its size
- High efficiency optics specially designed for LightGraphix guarantee excellent beam spread and shape
- Recessed LED position for reduced glare
- Optional IP54 version for wet areas, comes with glass and gasket
- Hidden spring clip fixings
- Simple and fast installation
- Available with Switch, 0-10V, DMX, DALI or mains dimmable drivers

Specification

Applications




Beam Angles	12°, 31°, 48°					
LED type	1 x Cree XPG2					
Colour temperature	2700K** / 3000K			5000K		
Drive Current (mA)	350	500	700	350	500	700
LED power* (W)	1.2W	1.7W	2.4W	1.2W	1.7W	2.4W
CRI (typical)	93	93	93	75	75	75
Forward voltage (V) ₁₀₀	3.0V	3.2V	3.4V	3.0V	3.2V	3.4V
Delivered lumens** (L ₁₀₀)	107	146	195	130	177	237
Lumens per circuit watt	89	86	81	108	104	99
LED lifetime (to 70% lumen maintenance)	50,000hrs at a max ambient temperature of 35°C (if specifying fitting in ambient temperatures of up to 45°C run at 500mA max, LD71M-500)					
Materials	Anodised & painted aluminium body, bezel					
Glass	1.2mm thick borosilicate (IP54 version only)					
Wiring	Comes pre-wired with 2x 200mm single core lead, can be specified with up to 3m of single core cable at extra cost					
IP rating	IP40 standard (optional IP54)					

*LED wattage includes losses associated with using an 85% efficient driver

** 2700K lumen output is 12% lower than the 3000K figure listed

4000K lumen output is 14% higher than the 3000K figure listed (80 CRI)

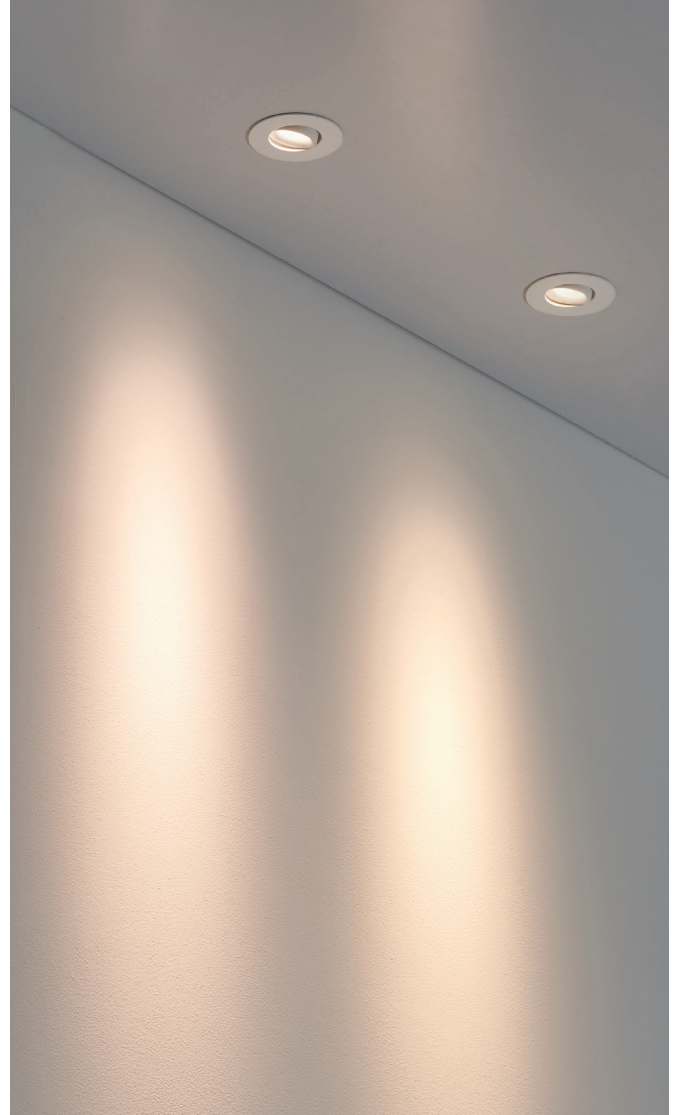



LD71M

Miniature Adjustable Low Glare LED Downlight


Data sheet - Page 2




Dimensions and Fixing Options

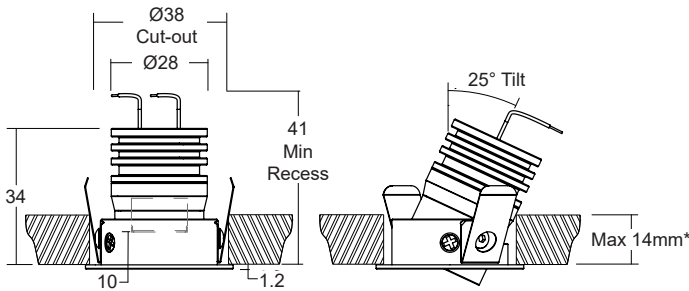

*For mounting surfaces over 14mm, use the detail below to allow for full fitting adjustment

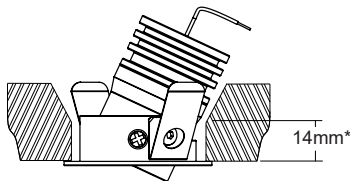

IP54 rated version includes a glass front and a gasket that sits between the heat-sink and the bezel

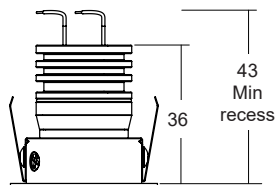

Photometrics

Photometric files are included in the design pack which can be downloaded from the LD71M product page on the website.

Order Codes and Options

Product code	LED colour	Beam angle	IP Rating	Finish
LD71M-350 LD71M-500 LD71M-700	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Example: LD71M-700 / LW30 / MB / IP54 / White

Product codes with output options

1.2W LED at 350mA	LD71M-350
1.7W LED at 500mA	LD71M-500
2.4W LED at 700mA	LD71M-700

LED colour options

LED colour options	Suffix
Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50
Blue	/LB
Green	/LG
Red	/LR
Amber	/LA

*Other LED colour temperatures are available. Please speak to a member of our sales team.

Beam / lens angle options

12° narrow spot	/NB
31° medium	/MB
48° wide	/WB

IP Rating

IP40 (dry internal use as standard)	/IP40
IP54 rated for moist environments	/IP54

Bezel finish options

Paint finish silver / black / white (RAL 9016) / RAL
Chrome finish (minimum order - please contact us)

Use with 350mA, 500mA & 700mA constant current LED drivers

We have a wide range of dimmable LED drivers, 0-10V, DMX, DALI and mains dimmable. Please see the downloads section on our website:

To run 1-14 LD71M-350 in series use a TXDEL350D (0-10V dimmable)

To run 1-14 LD71M-500 in series use a TXDEL500D (0-10V dimmable)

To run 1-13 LD71M-700 in series use a TXDEL700D (0-10V dimmable)