

LD10237 with new E1 LED Light Engine



LED Up or Down Wall Washer

Data sheet - Page 1



Design: San Baxter Lighting Design
Project: Private Residence Product: LD10236

The new LD10237 features an all new E1 LED engine, along with a new range of optics. Tunable White and RGBW options are also available. A compact, high quality wall washer with excellent output. The LD10237 has a very minimal design ensuring it will blend into most interior and exterior project styles. Low glare has been achieved by setting the LED back into the fitting which is then held in place by a matt black anti glare ring. It has been used for general illumination and creating effects around buildings, as well as an extensive list of interior projects. It is available in a range of finishes.

Key Features

- New E1 engine, featuring the CREE XHP35 LED with 2-step binning
- New optional 2nd channel LEDs for secondary lighting applications
- New optics, featuring an impressively narrow 10° spot is for lighting columns and arches, or a 15°x 49° spreader lens, ideal for wall washing
- Single optic produces a very consistent beam with no multiple shadows
- LED and lens recessed in a matt black anodised bezel for reduced glare
- High quality machined components
- Interior or exterior use
- Minimal aesthetic enabling it to fit into most project styles
- Discreet fixing with two grub screws behind the body
- Built-in reverse polarity protection
- LD10237 is available with RGBW and Tunable White LED engines
- Available with Switch, 0-10V, DMX, Dali or Mains dimmable drivers

Specification

Applications						
Beam Angles	10°, 19°, 34°, 54°, 15°x 49°					
LED type	1 x E1 LED Engine with 2-step binning (LED data below)					
Colour temperature	2700K** / 3000K / 4000K			5000K		
Current	350mA	500mA	700mA	350mA	500mA	700mA
LED power (Max)	5W (4.4W)*	7W (6.3W)*	10W (9W)*	5W (4.4W)*	7W (6.4W)*	10W (9W)*
CRI (Min)	85	85	85	80	80	80
Forward voltage (V) ₁₀₀	14V	14V	14V	14V	14V	14V
Delivered lumens (L ₁₀₀)	358	474	566	386	511	611
Lumens per circuit watt	71	67	56	77	73	61
LED lifetime (to 70% lumen maintenance)	50,000hrs at a max ambient temperature of 35°C (if higher ambient then run at 500mA up to 45°C)					
Glass	3mm thick low iron glass					
Materials	Anodised aluminium body, with stainless steel fixing bracket					
Wiring	Comes pre-wired with 1m lead. Single colour equipped with 2 core cable, 2 Channel or TW engine with 4 core cable & RGBW with 8 core cable. Can be specified with up to 10m at extra cost.					
IP rating	IP67					

*indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver
**2700K lumen output is 8% lower than the 3000K figure listed




LD10237 with new E1 LED Light Engine



LED Up or Down Wall Washer

Data sheet - Page 2

Dimensions

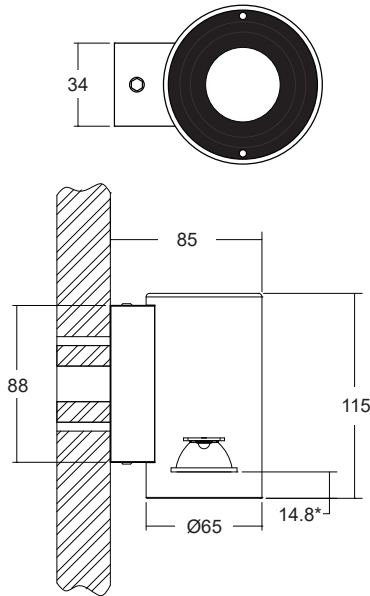

* 4.3mm when using the taller RGBW optic
(Dimensions in mm)

Finish Options

A range of finishes are available. Painted and anodised finishes are both suitable for exterior applications. However for harsh environments anodised is more hard wearing. Other finishes available.


Silver Anodised **Polished and Chemically Brightened** **Paint Finish White** **Paint Finish Black**



*Fitting shown is a modified LD10236

Cone Diagrams

Cone diagrams below are based on a 3000K E1 LED engine run at maximum output 700mA, 10W. Example images shown is a fitting wall washing a 3m wall.

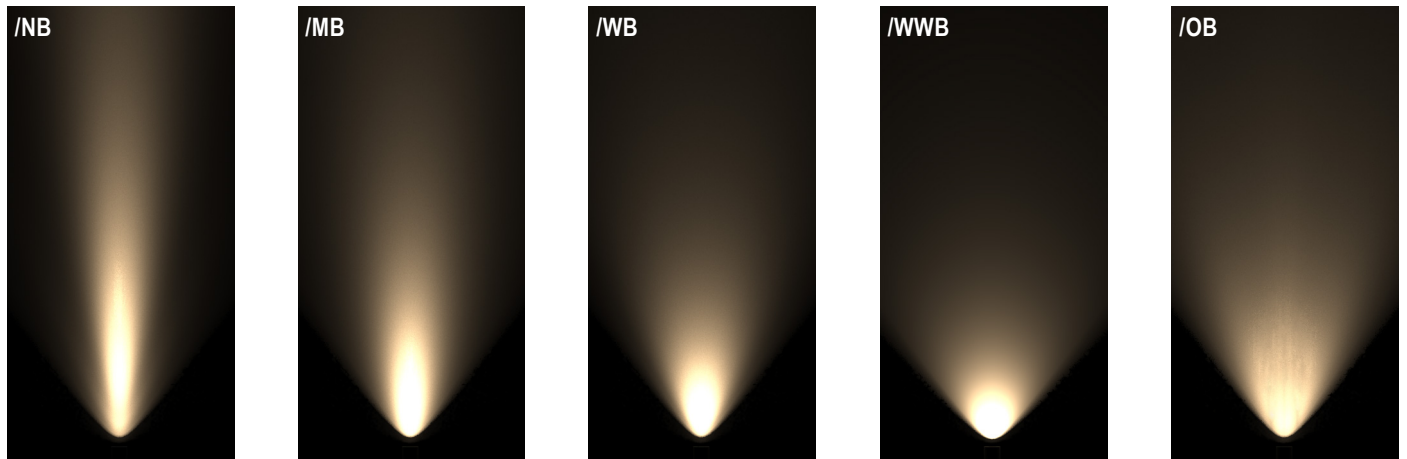

Narrow Beam
700mA using a 10° optic

Distance (m)	Cone Width (m)	Luminance (lx)
3.0	0.62	765
2.5	0.52	1102
2.0	0.41	1721
1.5	0.31	3060
1.0	0.21	6884
0.5	0.10	27538

Medium Beam
700mA using a 19° optic

Distance (m)	Cone Width (m)	Luminance (lx)
3.0	1.06	369
2.5	0.88	531
2.0	0.71	830
1.5	0.53	1475
1.0	0.35	3319
0.5	0.18	13278

Wide Beam
700mA using a 34° optic

Distance (m)	Cone Width (m)	Luminance (lx)
3.0	1.97	131
2.5	1.64	188
2.0	1.32	294
1.5	0.99	523
1.0	0.66	1176
0.5	0.33	4706

Extra Wide Beam
700mA using a 54° optic

Distance (m)	Cone Width (m)	Luminance (lx)
3.0	3.06	63
2.5	2.55	91
2.0	2.04	142
1.5	1.53	253
1.0	1.02	570
0.5	0.51	2279

Oval Beam
700mA using a 15° X 49° optic

Distance (m)	Cone Width (m)	Luminance (lx)
3.0	2.72 / 0.75	217
2.5	2.27 / 0.62	312
2.0	1.81 / 0.50	488
1.5	1.36 / 0.37	868
1.0	0.91 / 0.25	1952
0.5	0.45 / 0.12	7809

Photometric files (LDT) are included in the design pack which can be downloaded from the LD10237 product page on the website.

LD10237 with new E1 LED Light Engine

LED Up or Down Wall Washer

Data sheet - Page 3

Product Features**OPTIC**

Revised high efficiency optics with a new range of beam angles to create the ideal lit effect.

LED

- E1 LED engine.
- E1 LED engine, with the optional 2nd channel.
- TW Tunable White LED engine.
- RGBW LED engine with colour mix lens.
- CLR Colour LED engine.

BODY


Machined and anodised body. 6000 series aluminium chosen for its thermal characteristics and resistance to corrosion.

BEZEL

Matt black anodised for reduced glare.

BODY

Silver anodised, chemically brightened, paint finish white (RAL 9016) / black / RAL. Other paint finishes available, please talk to sales.

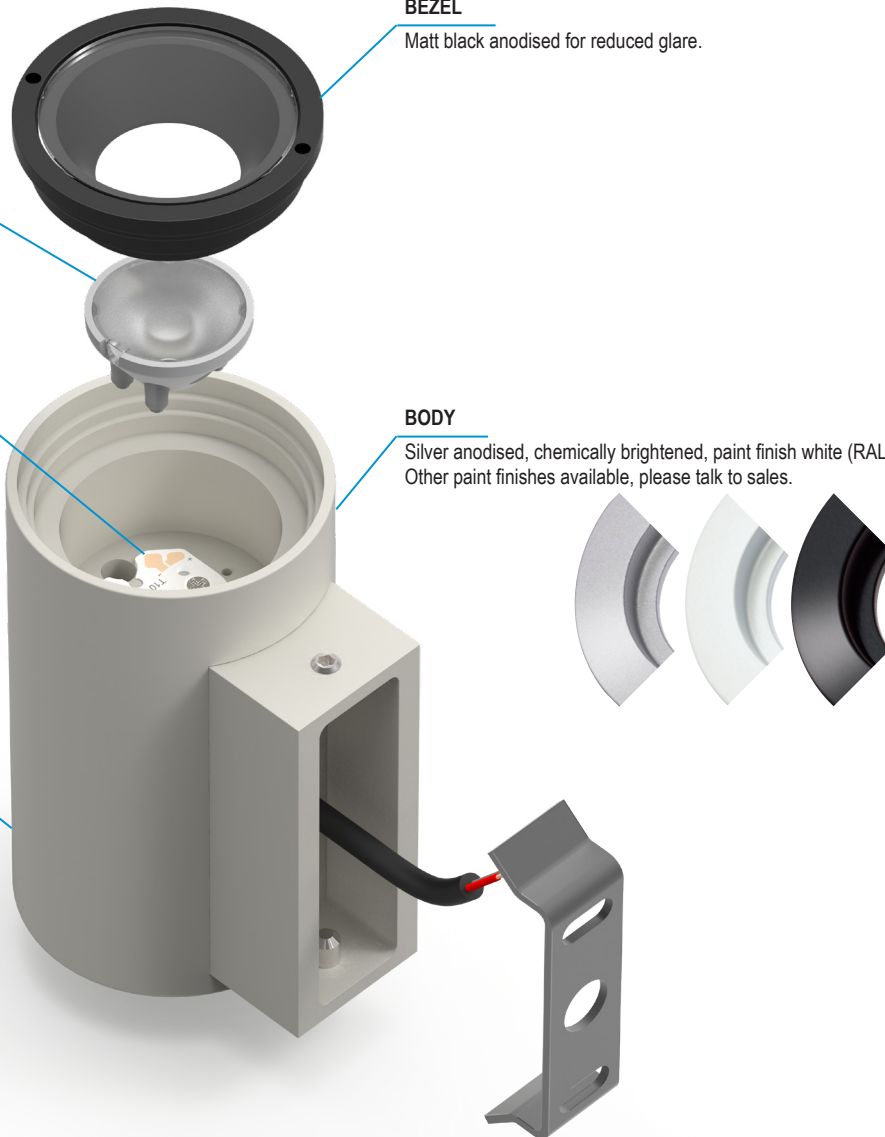

LD10237 with new E1 LED Light Engine

















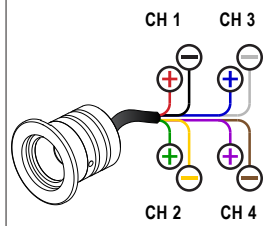
LED Up or Down Wall Washer


Data sheet - Page 4

LED Options and Technology

New LED Options

LD10237 is now available with a choice of light engines which feature a new all copper board for increased thermal transfer. The new E1 light engine for white light applications uses the new Cree XHP35 LED and features on board polarity protection.. This smaller LED chip has enabled a wider range of beam angles to be offered, coupled with increased efficiencies. This engine is also available with two extra LEDs on a second channel, for night lighting and marine navigation applications. The new tunable white engine offers a choice of dynamic colour options.


	E1 Light Engine (White light) 	E1-2CH 2nd channel board 	CLR - Colour 	TW - Tunable White 	RGBW 
LED Board					
LED type	Cree XHP35	Cree XHP35 + XQE's	Cree XQE's	Cree XQE's	Cree XML
Key Features	<ul style="list-style-type: none"> - Available in 2700K, 3000K, 4000K and 5000K - Very small chip size - Tighter narrow beams - Wider range of beam angles - 2 step binning - Brighter more efficient LED - On board polarity protection - All copper LED board for increased thermal transfer 	<ul style="list-style-type: none"> - Main white LED with optional 2nd channel for night lighting or marine navigation applications - 2nd channel comprises of 2 XQE LEDs mounted next to the XHP35 - Beam shape from the XQE's is different from the main LED as they are mounted to the sides of the optic - 2 driver circuits required - All copper LED board 	<ul style="list-style-type: none"> - 4 colour XQE LEDs mounted under a single optic - All copper LED board - Red, Blue, Green and Amber colour LED options - Single LED circuit 	<ul style="list-style-type: none"> - 4 XQE LEDs mounted under a single optic - 2 LEDs per colour - Excellent dynamic white mixing from a range of optics - All copper LED board - 2 driver circuits required 	<ul style="list-style-type: none"> - RGBW LEDs mounted under a single 26deg optic for superb colour mixing - White LED is 4000K - All copper LED board - 4 LED circuits required
Cables					
Lumen output	See front page	See front page		See table below	

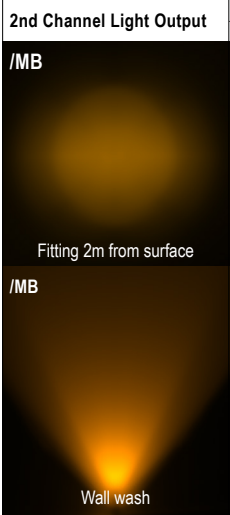

Colour temperature	Warm White 2700K or 3000K	Cool White 4000K or 5000K
Current	500mA	500mA
LED power (Max) All channels in use	7W (6.3W) 3.5W per channel	
CRI (Min)	85	
Delivered lumens (L ₁₀₀)	148lm	188lm
Lumens per circuit watt	42	54

Industry Leading LED Thermal Management

High quality, embedded copper PCB, with direct contact cooling for the LEDs providing industry leading thermal management of the LED. Guaranteeing long life and minimal colour shift.



LD10237

 with new E1 LED Light Engine

LED Up or Down Wall Washer



Data sheet - Page 5

Order Codes and Options

White LED Options - E1 Light Engine

Product code	LED colour	Beam angle	Finish
LD10237-E1 - 350 - 500 - 700			

Example: LD10237-E1-500 / LW30 / NB / Silver Anodised

Product codes with output options

5W LED at 350mA	LD10237-E1-350
7W LED at 500mA	LD10237-E1-500
10W LED at 700mA	LD10237-E1-700

LED colour options

LED colour options	Suffix
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50
With 2nd channel (red for navigation or amber night lighting) LD10237-E1-2CH	/LW**+L*

*For other single colour options, please discuss with the sales team

Beam / lens angle options

10° narrow spot	/NB
19° medium	/MB
34° wide	/WB
54° extra wide	/WWB
15° x 49° oval	/OB

Finish options

Silver anodised
Polished and chemically brightened (stainless steel effect)
Paint finish black / white (RAL 9016) / antique bronze / satin antique brass / satin brass / RAL finish

Use with 350mA, 500mA & 700mA constant current LED drivers

We have a wide range of dimmable LED drivers, 0-10V, DMX, DALI and Mains dimmable. Please see the downloads section on our website:
To run 1-4 LD10237-E1-350 in series use a TXDEL350D (0-10V dimmable)
To run 1-4 LD10237-E1-500 in series use a TXDEL500D (0-10V dimmable)
To run 1-4 LD10237-E1-700 in series use a TXDEL700D (0-10V dimmable)

Colour LED Options - CLR Light Engine

Example: LD10237-CLR-500 / LR / MB / Black / SMB

LED colour options (max 500mA)	Suffix
Red	/LR
Green	/LB
Blue	/LG
Amber	/LA

Driver requirements identical to E1 engine, beam angles identical to TW engine

Tunable White Options - TW Light Engine

Product code	LED colour	Beam angle	Finish
LD10237-TW - 350 - 500			

Example: LD10237-TW-500 / LW27 + LW40 / MB / Silver Anodised

Product codes with output options

5W LED at 350mA - 2 channels of 2 x 1.2W	LD10237-TW-350
7W LED at 500mA - 2 channels of 2 x 1.7W	LD10237-TW-500

LED colour options

LED colour options	Suffix
Tunable White 2700K & 4000K (standard option)	/LW27 + LW40
Tunable White 2700K & 5000K	/LW27 + LW50
Custom	/LW** + LW**

Fitting comprised of 2x LEDs in one colour temperature & 2x LEDs in another. Other white colour options available on request, please discuss with our sales team.

Beam / lens angle options

Narrow spot not available due to poor colour mixing	
24° medium	/MB
38° wide	/WB
54° extra wide	/WWB
20° x 46° oval	/OB

Finish options

Same as White LED options using the E1 Light Engine

Use with 350mA & 500mA constant current LED drivers

We have a wide range of dimmable LED drivers, 0-10V, DMX, DALI and Mains dimmable. Please see the downloads section on our website:
To run 1-7 LD10237-TW-350 in series use 2x TXDEL350D (0-10V dimmable)
To run 1-7 LD10237-TW-500 in series use 2x TXDEL500D (0-10V dimmable)

Colour Change RGBW Options - RGBW Light Engine

Product code	Finish
LD10237-RGBW - 350 - 500	

Example: LD10237-RGBW-500 / Silver Anodised

Product codes with output options

5W LED at 350mA (4x 1.2W LEDs)	LD10237-RGBW-350
7W LED at 500mA (4x 1.7W LEDs)	LD10237-RGBW-500

RGBW features a 4000K white LED for creating hues

Beam / lens angle

38° colour mix lens	/MB
---------------------	-----

Finish options

Same as White LED options using the E1 Light Engine

Use with 350mA & 500mA constant current LED drivers

We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website:
To run 2-13 LD10237-RGBW-350 in series use a TXDEL4A350DMX or TXDEL4A350DALI
To run 2-13 LD10237-RGBW-500 in series use a TXDEL4A500DMX or TXDEL4A500DALI