
LD Prismex

Made To Measure LED Light Panels



Data sheet - Page 1

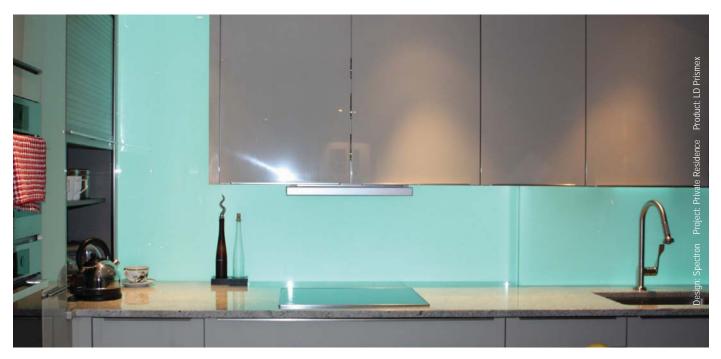


LD Prismex has been redesigned, and is now a 24V LED system. This has allowed a smaller LED profile to be designed, and reduces the quantity of LED drivers needed. It is an ideal product for back bar/shelving lighting, light boxes with restricted depth and back lighting to signage/posters.

Design Tip: Our 900lm/m LGX9C board offers a more than adequate amount of light for most details. It also has the smallest LED cut increments of 75mm so we can get closer to the requested dimensions.

Key Features

- Choice of LED outputs depending on the application, including RGB
- Only 24mm depth which includes a frosted panel
- Custom made to size
- White or coloured frosted panels available
- Maximum usable lit area 1460mm x 2980mm
- Multiple panels can be butted up for larger applications
- 1460mm is the maximum distance between the LED strips
- Available with Switched, 1-10V, DMX or Dali drivers









LED output options	LGX9C 900 lm/m**		Power 1700 lm/m**		RGB 435 lm/m**	
Applications						
Description	LightGraphix high output LED board		High output tape		RGB tape	
Colour Temperature*	3000K	5000K	3000K	5000K	-	
Delivered lumens / m	900lm/m**	1000lm/m**	1700lm/m**	1800lm/m**	435lm/m**	
Watts / m	12.5	W/m	22.7W/m		18W/m	
Lumens per watt	70lm/w**		70lm/w**		24.1 lm/w**	
Voltage (V)	24V DC					
CRI	85 -				-	
LED	Osram Flex					
LED cut increments	75mm		150mm		100mm	
LED spacing	25mm		25mm		25mm	
Min single length	75mm		164mm		115mm	
Max single length**	3004mm					
LED lifetime	50,000hrs (to 70% lumen output)					
Max ambient temperature	45°C 30°C				30°C	
Minimum bend radius	200mm					
Materials	Silver anodised aluminium extrusion, Perspex prismex panel					
IP rating	IP40					

* 2700K (LW27) extra warm white is available


** Lumen data is estimated, we are awaiting photometric testing

LD Prismex

Made To Measure LED Light Panels

White frosted panel

- Use with white and RGB LEDs

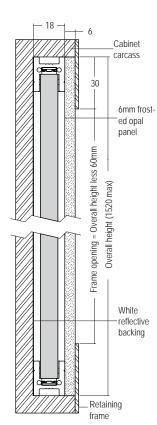

Colour frosted panel

(24V


(IP40)

F

Data sheet - Page 2

LightGraphix Creative Lighting Solutions


> - Only use with white LEDs - 6mm spacer is required as colour panel is thinner

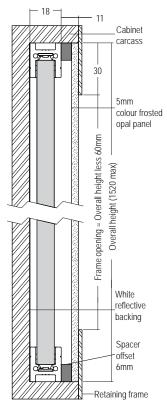

Fixing Details and Dimensions


Prismex panels need to be illuminated from 2 sides to achieve an even panel of light. The diagrams below show a typical installation detail. Both the prismex and the frosted panels need to be secured by a retaining frame which would be part of the joinery detail.

(Dimensions in mm, prismex panel and frosted panel supplied seperately)

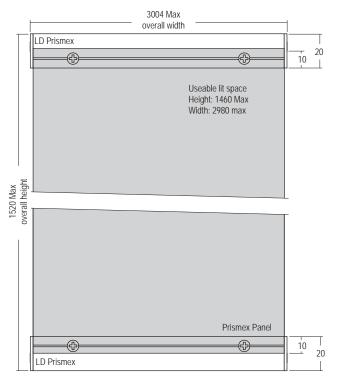

Multiple Panels Butted Together

When multiple panels are needed, LD Prismex can be supplied with no end caps to allow a seemless join to the next panel. To reduce any dark spots between panels we recommend a 10mm spacer is used between the prismex and the frosted panel.

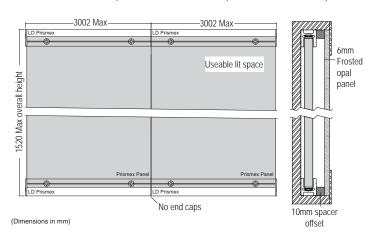


LD Prismex

Made To Measure LED Light Panels

Prismex technology

Primsex panels are made from clear acrylic which has a custom white dot matrix screen printed onto both sides. The size of the dots vary in size depending on how far they are from the light source. The further away they are the larger the dots, and the more light these reflect. When used with a frosted panel this creates an even glow.





Order Codes and Options

Product code LD Prismex / LED output / LED colour / Frosted panel / LED colour / Frosted panel / LED colour / Frosted / LED colour / LED colour / Frosted panel / LED colour / LED colour / Frosted panel / LED	Size
LED output options	Suffix
LGX9C	/LGX9C
Power	/Power
RGB	/RGB
LED colour options	
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
Cool White (5000K Short)	/LW50
Frosted panel options	
White frosted panel (030 opal polar frost)	
Colour frosted panel (specify colour eg. chilli red frost)	

Size

The size specified needs to include the LED lengths so overall dimensions (please bare in mind the useable lit space)

To be used with 24V constant voltage LED Drivers and Controllers

We offer a range of drivers with 1-10V, DMX, and DALI dimming options. Please download the data sheet from the downloads section at www.lightgraphix.co.uk, or contact us for more information



LightGraphix Creative Lighting Solutions

