


LD150T

HIGH-POWER TILTED INTERIOR LED UPLIGHT



The LD150T is a powerful interior uplight with a compact size and depth, designed with the LED and optics at a 6° tilt. This feature focuses the light onto the lit surface reducing spill onto any ceiling or canopy. By angling the light it reduces glare and allows installation further away from the wall or column. This product can be specified with a wide range options allowing it to suit many project requirements with multiple bezel finishes to choose from as well as accessories, including its own unique glare shield. Available LED engines include E3 and F1 which offer a range of colour temperatures between 2200K-5000K and various beam angles. When used with an oval beam the LD150T offers a superb wall washing effect. The bezel aesthetic is minimal with chamfered edges, black trim glass and no visible fixings. This is a very tough, high quality fitting, machined from high grade materials, ensuring excellent thermal and light output performance.

Design: James Morse Lighting Design
Project: Rochester Cathedral
Product: LD150T

KEY FEATURES

- > E3 engine option with NICHIA LED delivering up to 626 lumens at 700mA when specified with concrete housing in 3000K
- > F1 COB LED also available in 2200K
- > Chamfered edged bezel available in 316 Stainless Steel, Polished & Passivated 316 Stainless Steel, Machined Brass, Flamed Solid Bronze and RAL paint finishes
- > Optics set at a 6° tilt to focus the beam onto the lit surface from a distance with glare angled away from view
- > LED and lens are recessed within a black anodised body for reduced glare
- > Range of beam angles including a narrow 12° spot ideal for lighting columns and arches, or wall washing
- > Half-moon glare shield option to minimise the view of the intense light source without affecting the wash of light
- > Single light source and optic produces a very consistent beam with no multiple shadows and 2-step binning
- > Toughened glass with black ceramic trim
- > Fitting rated IK08
- > Hidden fixing options include first fix sleeve or concrete housing
- > Switched, 0-10V, Casambi, DMX, DALI or Mains dimmable drivers available




DIMENSIONS

Dimensions in mm

For full dimensions please go to page 4.



SPECIFICATION

Engine	 E3	 F1
Beam angles	12°, 19°, 34°, 54°, 49° x 15°	25°, 46°, 65°, 43° x 25°
LED manufacturer	NICHIA	CREE
Colour temperature*	2700K / 3000K / 4000K / 5000K	2200K
Current	350mA 500mA 700mA**	350mA 500mA 700mA**
LED power (Max)	4.2W (5W***) 6W (7W***) 8.4W (10W***)	3.5W (3.2W***) 4.5W (5W***) 6.3W (7W***)
Delivered lumens (L ₁₀₀)***	372 487 626	163 215 308
Lumens per circuit watt	74 70 63	47 43 44
CRI (Typ)	85	90
Forward voltage (V ₁₀₀)	14V	9V
Colour consistency	2 SCDM	3 SCDM
Peak intensity	4391 cd	1565 cd
LED lumens	840	623
LOR	0.75	0.49
TM30	RF85 RG98	RF90 RG103
UGR****	7.0	9.1
LED lifetime	L90B5 at 90,000hrs	
Applications		

These values are based around a LD150T-E3-700-LW30-NB & LD150T-F1-700-LW22-MSB

*Lumen output data applies to all colour temperatures

**can only be specified with /482N concrete housing

***indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

***lumen output indicated is without the glare shield. Allow 30% less with the /GS glare shield.


**** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

Ambient temperature	-20° to 45° (500mA) or -20° to 35° (700mA)
Glass	6mm thick toughened glass with black ceramic screen print
Materials	Stainless steel bezel, anodised aluminium body
Weight of product	0.52kg
IP rating	IP54
IK rating	IK08
Wiring	In-series constant current wiring (pre-wired with 2 core cable at a length of 250mm)

AVAILABLE FINISHES

Please refer to our finishes guide for full details



316 STAINLESS STEEL

- > Marine grade 316 Steel
- > Standard machined finish
- > Extremely durable with very high corrosion resistance
- > Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation
- > Interior & exterior use

POLISHED & PASSIVATED 316 STAINLESS STEEL

- > Marine Grade 316 Steel
- > Mirror like finish
- > Extremely durable with very high corrosion resistance
- > Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments
- > Interior & exterior use

MACHINED BRASS

- > Solid CZ121 Brass
- > Standard machined finish
- > Corrosion resistance rated fair to excellent
- > Please note a natural green/brown patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location.
- > Interior & exterior use

FLAMED SOLID BRONZE

- > Solid Bronze
- > Hand finished Flamed Bronze unique to LightGraphix
- > Extremely durable with very high corrosion resistance.
- > Please note a natural dark patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location.
- > Interior & exterior use

PAINT FINISH

- > Matt Black, Matt White, and other RAL colours available
- > Not recommended for footlights in high traffic areas
- > Interior & exterior use

GLARE SHIELDS

6° TILT




/NGS No glare shield

No glare shield. Deep recessed optic and matt black anodised optic holder aids in glare reduction.

/GS Glare shield

Standard glare shield provides an excellent balance between glare control and light output. This accessory works well in most applications.

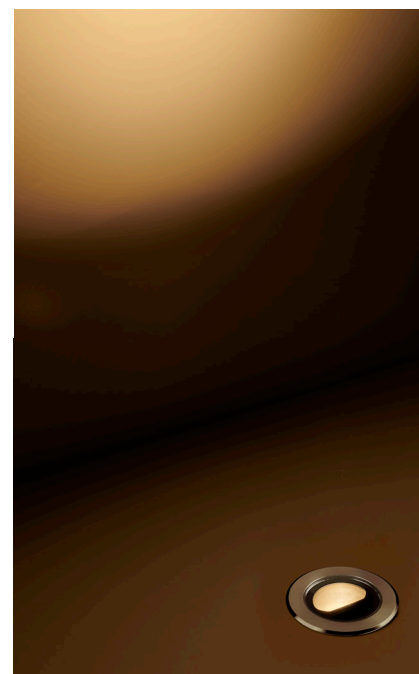



Please refer to our photometric files for lumen data.

The unique 6° tilt designed into the LD150T has many benefits. The tilt allows the light to be focussed onto the lit surface with reduced spill onto any ceiling or canopy, and light pollution into the sky. It also reduces the glare from the fittings as the light is tilted away from view and allows it to be installed further away from the wall or column in details where there may be an obstacle at the base of the surface to be lit. When specified with an oval beam it is very effective at wall washing.

DIMENSIONS AND FIXING ACCESSORIES


Dimensions in mm

Soft silicon seal holds the fitting into the cut-out.




/482S First fix sleeve

First fix sleeve is polypropylene. Fins on the side lock it into a range of mounting surfaces.



/482N or /482N-2 Concrete housing

Must be used when specifying the 700mA fitting. The aluminium housing is used as a heat sink which keeps the LED fitting cool through the thermal transfer of the heat within the housing to the surrounding concrete. The housings are big enough for IP rated connections to be made inside the housing and a second gland is available for cabling onto the next luminaire.

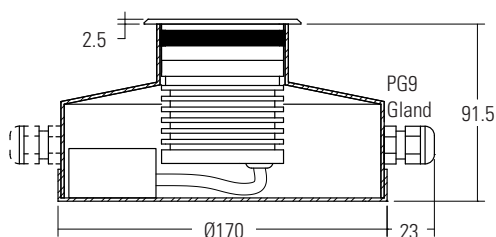

/484N

Concrete housing with 1x PG9 IP67 gland



/484N-2

Concrete housing with 2x PG9 IP67 gland


/ID Optional integral non dimming driver (single colour only at 350mA or 500mA).



CONE DIAGRAMS


E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 700mA, 10W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD150T product page on the website.

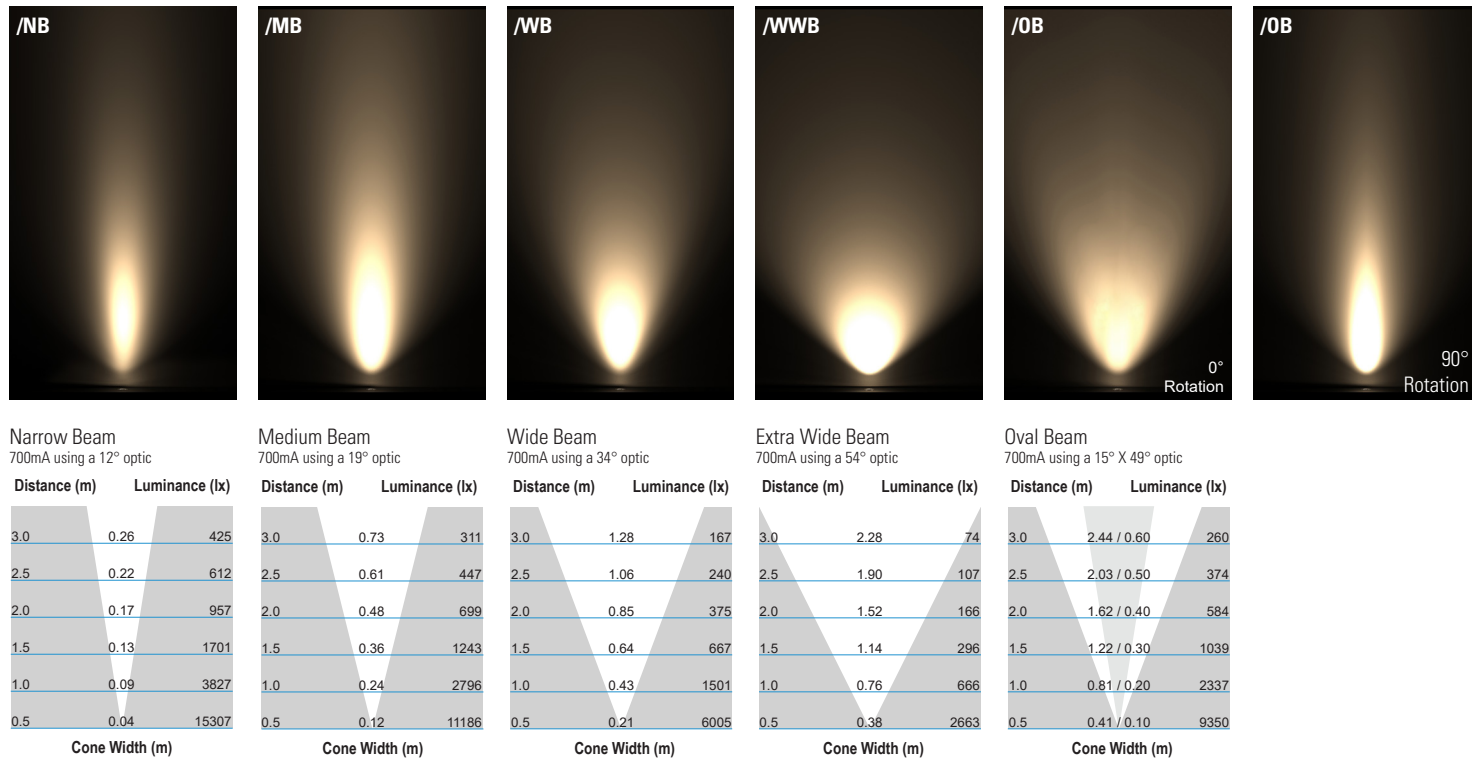


F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 10W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD150T product page on the website.

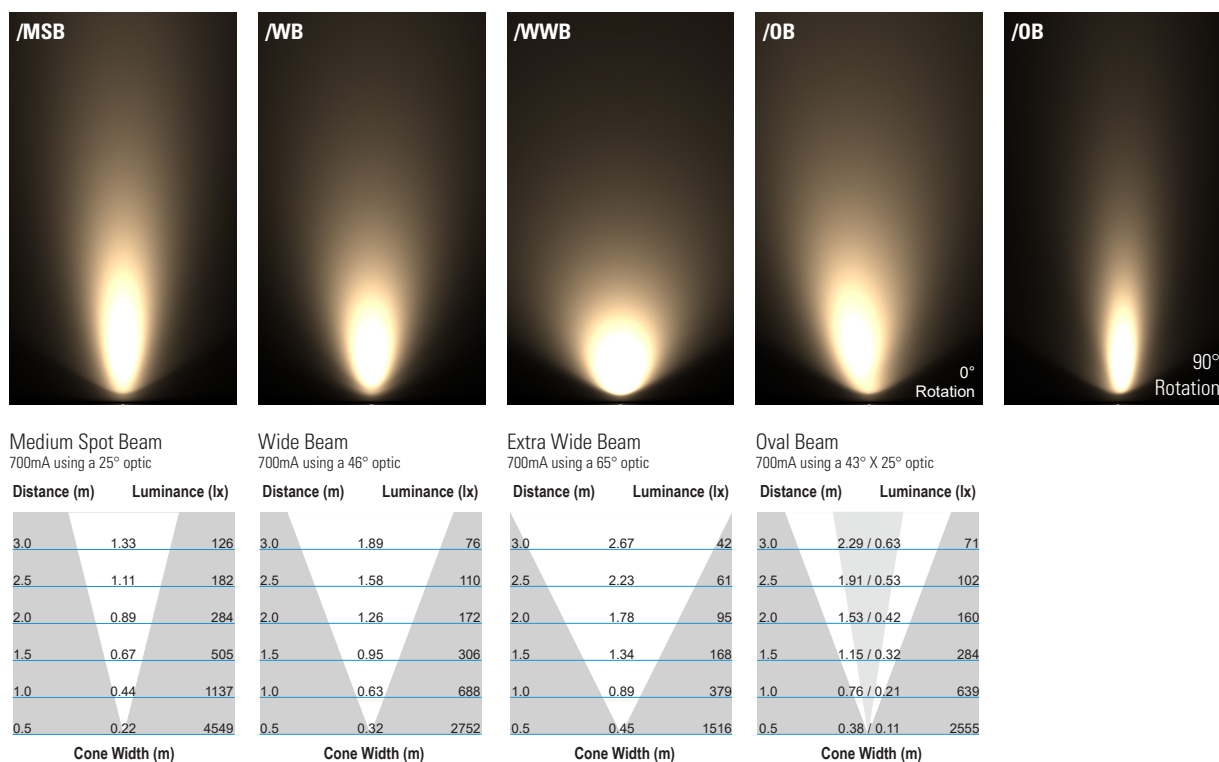

INSTALLATION GUIDE

Below is a luminaire positioning guide. Every project and lighting scenario will be different; the table below is to be used as a starting point for any wall wash design. Please use our photometric files to further test the desired effect for your application. Files are available on our LD150T product page on our website.

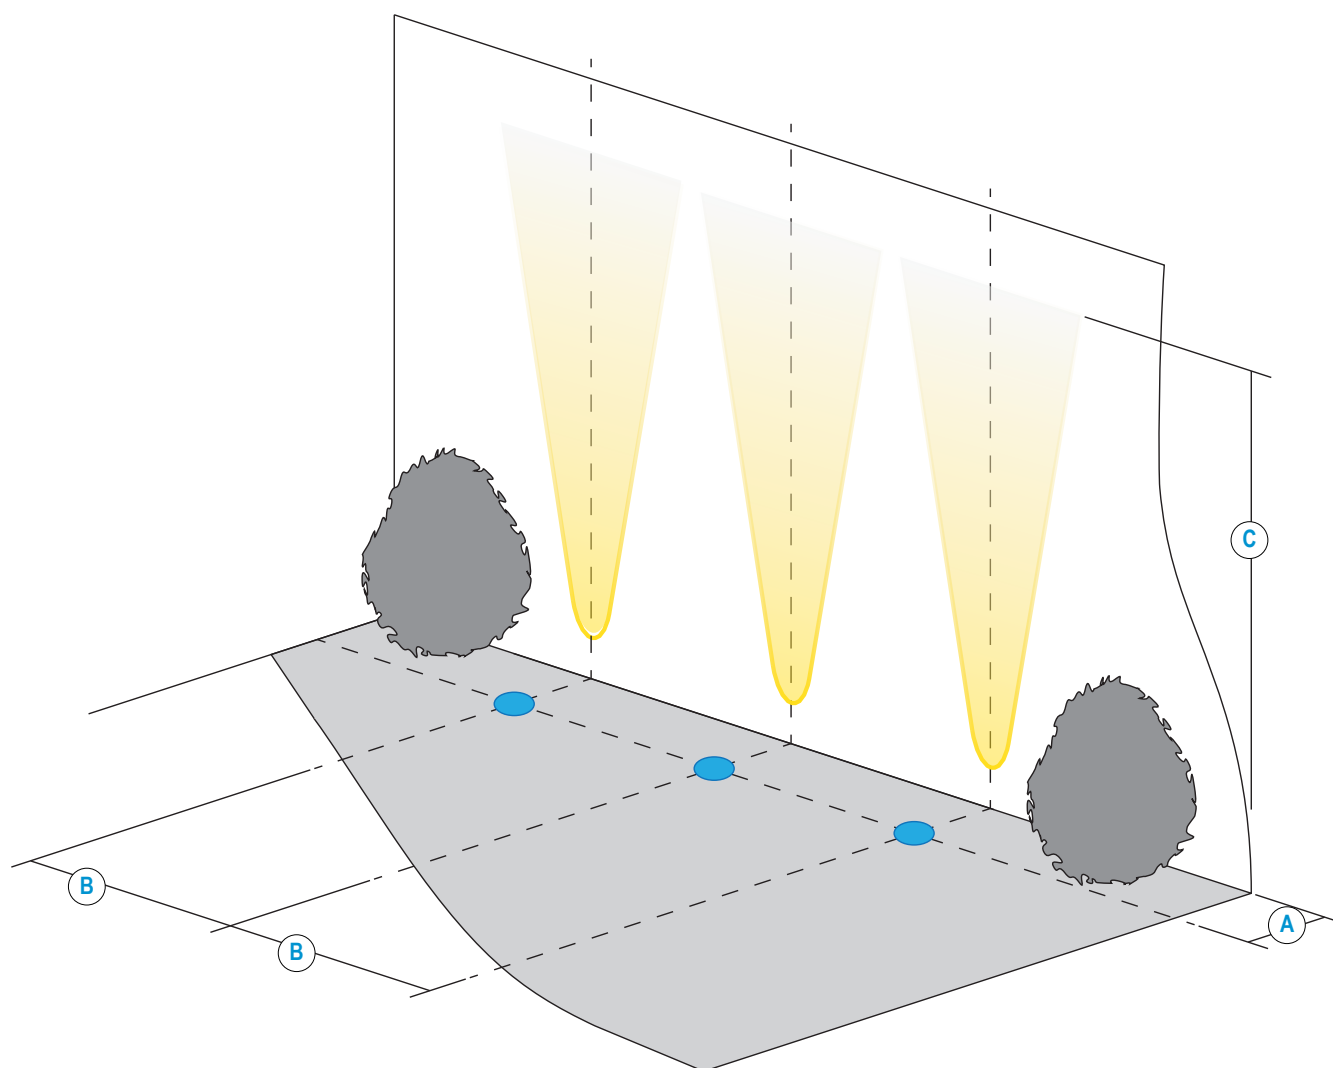

LD150T-E3		/NB	/MB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	250mm				
B	Spacing for an even wash	250mm*	350mm	400mm	500mm	500mm
C	500mA Lit distance	7m	4.5m	3.5m	2m	4m
C	700mA Lit distance	9m	7m	5m	3m	6m

LD150T-F1		/MSB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	250mm			
B	Spacing for an even wash	350mm	400mm	500mm	500mm
C	500mA Lit distance	3.5m	2.5m	2m	2.5m
C	700mA Lit distance	5m	3.5m	3m	3.5m

*Wall washing using narrow beam optics should only be used if the designer requires long distance lighting up the lit surface.

ORDER CODES & OPTIONS

Example: LD150T-E3-700 / LW30 / NB / NGS / Stainless Steel / 482N

Light Engine & Drive Current	LED Colour	Beam angle	Glare shield	Bezel finish	Fixing accessories
LD150T -	/	/	/	/	/

E3											
5W LED at 350mA	LD150T-E3-350	Extra Warm White (2700K)	/LW27	12° Narrow spot	/NB						
7W LED at 500mA	LD150T-E3-500	Warm White (3000K)	/LW30	19° Medium	/MB						
10W LED at 700mA	LD150T-E3-700	White (4000K)-on request	/LW40	34° Wide	/WB						
		Cool White (5000K)	/LW50	54° Extra wide	/WWB						
				15° x 49° Oval	/OB						