

## LD10235

### HIGH-POWER FLOOR OR CEILING MOUNTED SPOTLIGHT



## R + R



The LD10235 is a powerful floor and ceiling mounted spotlight suitable for interior or exterior applications and designed around our powerful LD150 and LD151 uplights. It can be specified with a wide range of options allowing it to suit most project requirements. Available LED engines include E3, Tunable White, CLR, RGBW and F1 which offer a range of colour temperatures between 2200K-5000K and beam angles with multiple accessories to choose from. The deep recessed LED and matt black inner baffle allow for an ultra-low glare illumination. Equipped with a built-in anti-wicking barrier for added protection against water ingress, the LD10235 has a sleek body that is a machined billet of aluminium, available in multiple paint finishes. This is a very tough, high quality fitting, machined from high grade materials, ensuring excellent thermal and light output performance.



Project: Scott's Riverside. Lighting Designer: 18Fifty Lighting. Product: LD10235. Photography: Gavril (www.gavrilux.com)

## KEY FEATURES

- > E3 engine featuring the NICHIA LED, delivering up to 653 lumens in 3000K with 2-step binning and built-in reverse polarity protection
- > Available with F1, CLR, RGBW and Tunable White LED engines and optional 2nd channel LEDs for secondary lighting applications
- > Surface mounted version of the LD151 recessed uplight
- > Range of beam angles, featuring narrow 12° spot for lighting columns and arches, or a 15°x 49° spreader lens, which is ideal for wall washing applications
- > Single light source and optic produces a very consistent beam with no multiple shadows
- > LED and lens recessed in a matt black anodised body for reduced glare
- > Optional glare shield accessories available for reduced glare
- > Body is a machined solid billet of aluminium
- > Paint finishes include: White (RAL 9016), Silver, Anthracite Grey (RAL 7016), Black (RAL 9005), Antique Bronze, Satin Antique Brass, Satin Brass or any RAL finish
- > Available with Switched, 0-10V, Casambi, DMX, Dali or Mains dimmable drivers

## DIMENSIONS

Dimensions in mm

For fitting dimensions please go to page 4.



## WHITE LED ENGINE SPECIFICATION

Engine	⊕ E3			⊙ F1		
Beam angles	12°, 18°, 31°, 55°, 14° x 48°			21°, 35°, 52°, 17° x 48°		
LED manufacturer	NICHIA			CREE		
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K			2200K, 2700K, 3000K, 4000K, 5000K		
Current [Rated Output]	350mA [5W]	500mA [7W]	700mA [10W]	350mA [3.5W]	500mA [5W]	700mA [7W]
Typical LED Circuit wattage	4.4W	6.4W	9.2W	3.3W	5W	7.2W
Delivered lumens (L <sub>100</sub> )*	379	493	653	227	241	367
Delivered lm/Circuit W**	85	77	71	68	48	51
Typical LED Source wattage	4W	5.8W	8.3W	3W	4.5W	6.5W
Source LED lm	574	740	949	377	497	654
Source lm/W	144	128	114	126	110	101
Forward voltage (V <sub>100</sub> )	11.3V	11.6V	11.8V	8.7V	9V	9.3V
CRI	85			90		
Colour consistency	2SDCM			3SDCM		
Peak intensity**	6,104 cd			1,641 cd		
LOR	0.69			0.56		
TM30	RF85   RG99			RF90   RG103		
UGR rating ('downlight' mounted) ***	4.5	5.4	6.4	6.5	6.7	8.1
BUG rating ('downlight' mounted)	B1-U1-G0			B1-U3-G0		
BUG rating ('uplight' mounted)	B0-U4-G0			B0-U3-G0		
LED lifetime	L90B5 at 90,000hrs			L90B5 at 90,000hrs		
Applications						

These values are based around a LD10235-E3-700-LW30-NB & LD10235 -F1-700-LW22-MSB

\*Lumen output data applies to all colour temperatures

\*\*LED wattage includes losses associated with using a 90% efficient driver

\*\*\*UGR values based on room parameters of 4H 8H, C70 W50 F20

## MECHANICAL

Ambient temp	-20°C to 45°C (500mA) or -20°C to 35°C (700mA)
Glass	Low iron glass 3mm thick
Materials	Anodised aluminium body, with black anodised bezel
Weight of product	0.55kg
IP rating	IP67
IK rating	IK08
Wiring	In-series constant current wiring (pre-wired with 2 core cable at a length of 1m)

## ENVIRONMENTAL

TM65	Available on request
TM66	2.5
Repair + Refurbish	<p>This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.</p>

COLOUR & DYNAMIC LED ENGINE SPECIFICATION

Engine	CLR - Colour	RGBW	TW - Tunable White
Beam Angles	24°, 38°, 54°, 20° x 46°	38° colour mix lens	24°, 38°, 54°, 20° x 46°
LED manufacturer	CREE	CREE	CREE
Colour temperature	Red, Green, Blue, Amber	Red, Green, Blue, 4000K White	Warm White 2700K or 3000K   Cool White 4000K or 5000K
Current	500mA	350mA   500mA	350mA   500mA
LED power (Max)	7W	5W   7W	6.3W (7W) 3.5W per channel
Applications			

MECHANICAL

Glass	Low iron glass 3mm thick		
Materials	Anodised aluminium body, with black anodised bezel		
Weight of product	0.55kg		
IP rating	IP67		
IK rating	IK08		
Wiring	<p><b>CLR</b> - 2 core cables at 1m in length</p>	<p><b>RGBW</b> - 8 core cables at 1m in length</p>	<p><b>TW</b> - 4 core cables at 1m in length</p>

AVAILABLE FINISHES

Please refer to our finishes guide for full details

The LD10235 body is a machined single billet of aluminium and is painted in-house at LightGraphix. Paint finishes are suitable for interior and exterior use on surface mounted products. Our standard colours are below but we can accommodate any RAL request.



SILVER ANODISED



ANTIQUE BRONZE



SATIN ANTIQUE BRASS



SATIN BRASS



BLACK (RAL 9005)



ANTHRACITE GREY (RAL 7016)



WHITE (RAL 9016)



RAL COLOURS




## DIMENSIONS

Dimensions in mm

Top view

Side view

Mounting plate

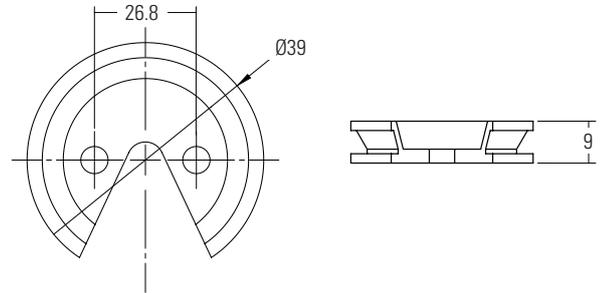

## GLARE SHIELD OPTIONS

LD10235 comes with a choice of glare control options to further reduce glare from the powerful LED and optic. This does not reduce the light on the lit surface (wall) but it will cut out some light onto the ceiling or floor. Please refer to our photometric files for lumen data that is available to download from our website.



### /NGS No glare shield

No glare shield. Deep recessed optic and matt black anodised optic holder aids in glare reduction.



### /GS Glare shield

Standard glare shield provides an excellent balance between glare control and light output. This accessory works well in most applications.



### /GSHM Half moon glare shield

Half-moon glare shield for applications that require very low glare. Minimal loss of light on lit surface (wall) but overall lumen output typically reduced by 50-60%.

## CABLE EXIT


The LD10235 features a sleek body with an integrated groove designed specifically for a flush cable exit when mounted. This design ensures a clean and seamless installation, allowing cables to be neatly concealed.



CONE DIAGRAMS

E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 700mA, 10W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD10235 product page on the website.

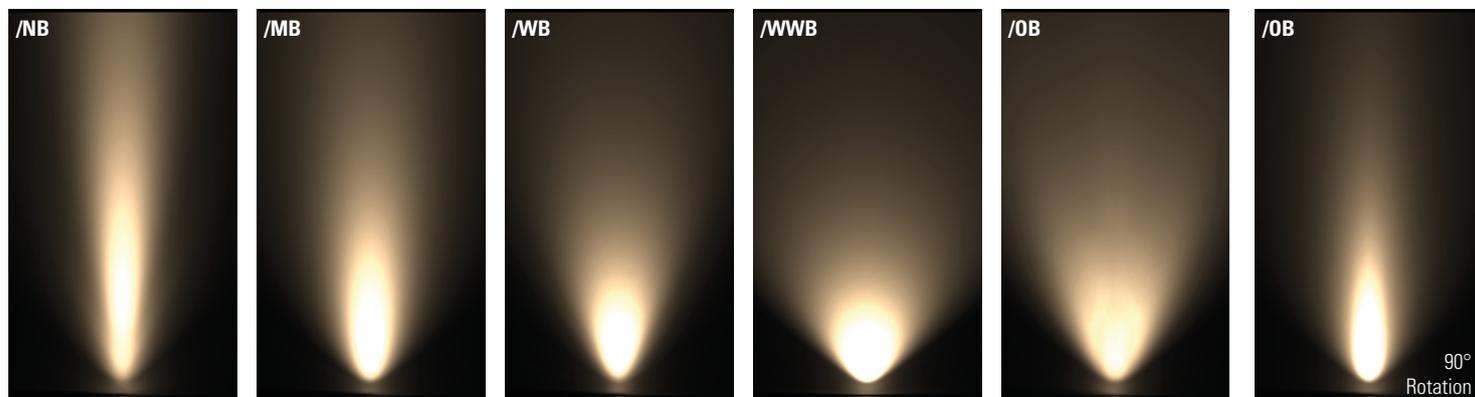

Narrow Beam  
700mA using a 12° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	0.76	674
2.5	0.63	970
2.0	0.51	1516
1.5	0.38	2694
1.0	0.25	6062
0.5	0.13	24248

Medium Beam  
700mA using a 19° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	0.95	434
2.5	0.79	625
2.0	0.63	977
1.5	0.48	1737
1.0	0.32	3909
0.5	0.16	15637

Wide Beam  
700mA using a 34° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	1.77	160
2.5	1.47	230
2.0	1.18	360
1.5	0.88	639
1.0	0.59	1438
0.5	0.29	5753

Extra Wide Beam  
700mA using a 54° optic


Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	3.24	74
2.5	2.70	107
2.0	2.16	167
1.5	1.62	296
1.0	1.08	667
0.5	0.54	2667

Oval Beam  
700mA using a 15° X 49° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	2.45 / 0.75	264
2.5	2.04 / 0.62	380
2.0	1.63 / 0.50	593
1.5	1.22 / 0.37	1054
1.0	0.82 / 0.25	2372
0.5	0.41 / 0.12	9489

F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 10W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD10235 product page on the website.

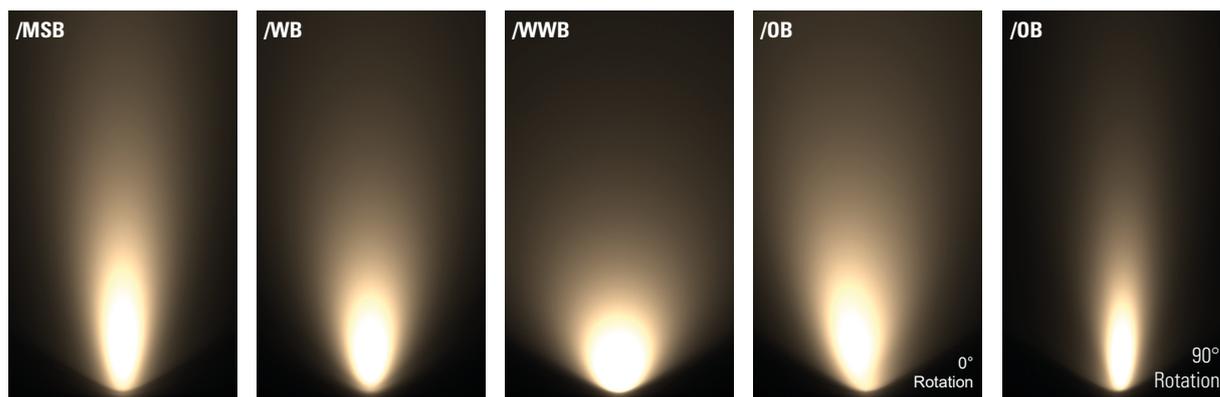

Medium Spot Beam  
700mA using a 25° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	1.17	202
2.5	0.97	290
2.0	0.78	454
1.5	0.58	806
1.0	0.39	1814
0.5	0.19	7256

Wide Beam  
700mA using a 46° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	2.02	82
2.5	1.68	119
2.0	1.35	185
1.5	1.01	330
1.0	0.67	742
0.5	0.34	2968

Extra Wide Beam  
700mA using a 65° optic


Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	3.85	39
2.5	3.21	56
2.0	2.57	88
1.5	1.93	156
1.0	1.28	351
0.5	0.64	1402

Oval Beam  
700mA using a 43 X 25° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	2.47 / 0.91	149
2.5	2.06 / 0.76	214
2.0	1.65 / 0.60	335
1.5	1.24 / 0.45	595
1.0	0.82 / 0.30	1339
0.5	0.41 / 0.15	5357

## INSTALLATION GUIDE

LD10235 is incredibly versatile, allowing it to be used in a variety of applications from lighting window reveals to wall and floor washing.

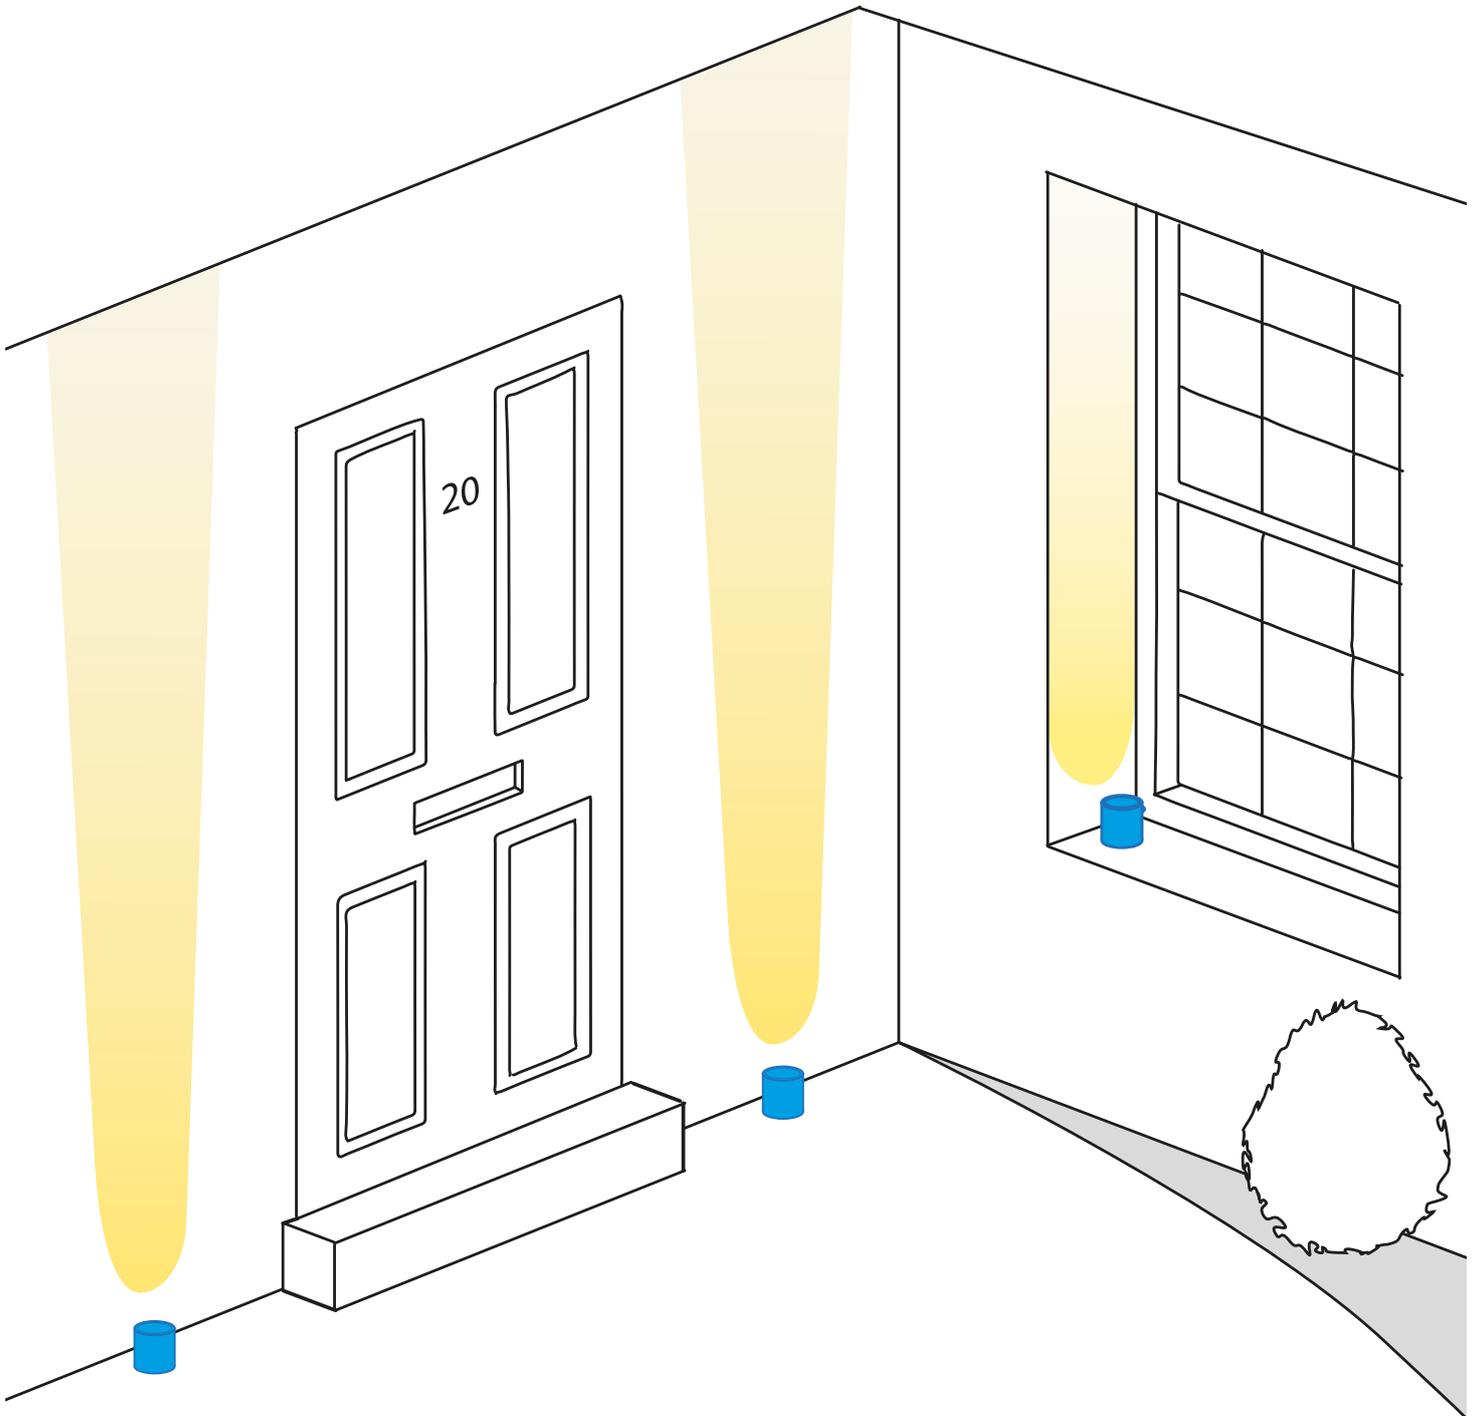

ORDER CODES & OPTIONS

Example: LD10235-E3-350 / LW30 / NB / NGS / White

Light engine & drive current / LED colour / Beam angle / Glare shields / Finish

LD10235 - / / / /

WHITE LED ENGINES

 E3

5W LED at 350mA	LD10235-E3-350
7W LED at 500mA	LD10235-E3-500
10W LED at 700mA	LD10235-E3-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

12° Narrow spot	/NB
18° Medium	/MB
31° Wide	/WB
55° Extra wide	/WWB
14° x 48° Oval	/OB

	/NGS
	/GS
	/GSHM

	Paint Finish Silver Anodised
	Paint Finish Antique Bronze
	Paint Finish Satin Antique Brass
	Paint Finish Satin Brass
	Paint Finish Black (RAL 9005)
	Paint Finish Anthracite Grey (RAL 7016)
	Paint Finish White (RAL 9016)
	Paint Finish RAL

 F1

3.5W LED at 350mA	LD10235-F1-350
5W LED at 500mA	LD10235-F1-500
7W LED at 700mA	LD10235-F1-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

21° Medium spot	/MSB
35° Wide	/WB
52° Extra wide	/WWB
17° x 48° Oval	/OB

COLOUR & DYNAMIC LED ENGINES

 CLR

7W LED at 500mA	LD10235-CLR-500
-----------------	-----------------

Red	/LR
Green	/LG
Blue	/LB
Amber	/LA

24° Medium	/MB
38° Wide	/WB
54° Extra wide	/WWB
20° x 46° Oval	/OB

 RGBW

5W LED at 350mA	LD10235-RGBW-350
7W LED at 500mA	LD10235-RGBW-500

38° Colour mix lens
---------------------

 TW

3.5W LED at 350mA	LD10235-TW-350
-------------------	----------------

Tunable White 2700K & 4000K (standard option)	/LW27 + LW40
Tunable White 2700K & 5000K	/LW27 + LW50
Custom	/LW** + L**

24° Medium	/MB
38° Wide	/WB
54° Extra wide	/WWB
20° x 46° Oval	/OB

**Drivers**  
Use with 350mA, 500mA & 700mA constant current LED drivers  
We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.