


# LD70, LD70-OP & LD70D

Ultra Shallow Recessed Shelf Light



Data sheet - Page 1

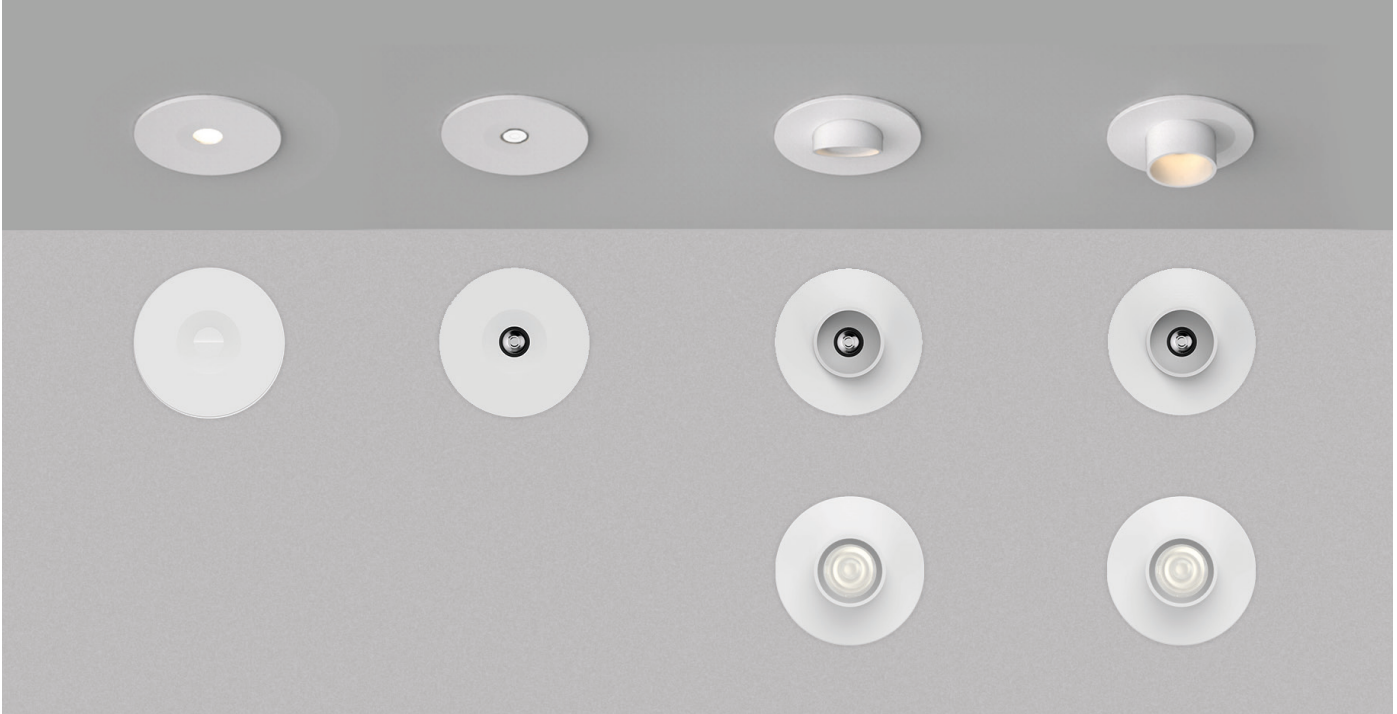

The LD70, LD70-OP and the LD70D range of light fittings is a series of extremely shallow recessed LED downlights. They feature minimal bezel thicknesses and are available with an optional half or fully cowled bezel to give optimal glare control, making them ideal for ultra discreet lighting in display cabinets or under shelving.

The LD70D is available with our standard narrow beam optic at a recess depth of 17mm, which allows for continuity with other LightGraphix products. Alternatively, where there is a requirement for an even shallower recess depth, the LD70 uses our new range of miniature optics and requires a recess depth of only 13mm. LD70-OP has an opal diffuser and no optic, creating a very wide, diffused spread of light.

Both LD70 + LD70D are available with half cowl (HC) & full cowl (FC) options.

## Key Features

- Very minimal product depth, only 13mm void needed (17mm required if LD70D is specified)
- Ideal for shelf or under cabinet lighting
- Spring clips designed for solid cabinets / shelving
- Polarity protection on chip
- Can be mounted directly into surface without the need for a thermal void
- Optional half & full cowled bezels available for further glare control
- Interchangeable bezels
- Wide range of beam angles & optics suitable for all projects
- Minimal bezel thickness
- 93 CRI LED in warm white.
- Available with switched, 0-10V, DMX, DALI or Mains dimmable drivers

## Specification

Applications			
Beam Angles*	NB, MB, WB, SWB		
LED type	C1 Engine with NICHIA LED		
Colour temperature	2700K, 3000K, 4000K, 5000K		
Drive Current (mA)	350	500	700
LED power** (W)	1.2W	1.7W	2.4W
CRI (typical)	93	93	93
Forward voltage (V) <sub>100</sub>	3.0V	3.2V	3.4V
LD70-OP Delivered lumens(L <sub>100</sub> )	36	48	60
Lumens per circuit watt	30	28	25
LD70 Delivered lumens(L <sub>100</sub> )	80	107	142
Lumens per circuit watt	66	62	59
LD70D Delivered lumens(L <sub>100</sub> )	109	142	189
Lumens per circuit watt	90	83	78
LED lifetime	L90B5 at 90,000hrs		
Materials	Aluminium body and bezel		
Wiring	Comes pre-wired with flat 2-core 100mm lead, can be specified with up to 10m at extra cost		
IP rating	IP20		

\* NB available only in LD70D, SWB available only in LD70-OP

\*\*LED wattage includes losses associated with using an 85% efficient driver

\*\*\* Lumen output data applies to all colour temperatures.










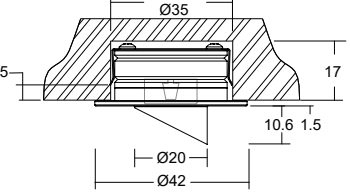

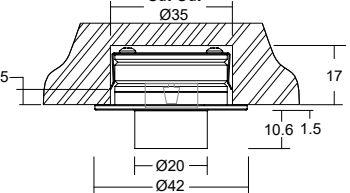
# LD70, LD70-OP & LD70D



Ultra Shallow Recessed Shelf Light

Data sheet - Page 2

## Comparison Guide

	Product Diagram	Void Recess Depth	Beam Angle	Drive Current	Narrow Beam Available
<b>Opal Diffusion</b>					
 <b>LD70-OP</b>		13mm	120°	350mA, 500mA, 700mA	N
<b>Lisa Micro Optics</b>					
 <b>LD70</b>		13mm	30°, 51°	350mA, 500mA, 700mA	N
 <b>LD70-HC</b>		13mm	30°, 51°	350mA, 500mA, 700mA	N
 <b>LD70-FC</b>		13mm	30°, 51°	350mA, 500mA, 700mA	N
<b>Tina Mini Optics - Used in LD51 / LD56 / LD71</b>					
 <b>LD70D-HC</b>		17mm	12°, 31°, 55°	350mA, 500mA, 700mA	Y
 <b>LD70D-FC</b>		17mm	12°, 31°, 55°	350mA, 500mA, 700mA	Y

\*The Tina optic is the standard optic for all LightGraphix products that use the Cree XPG2 LED. It is recommended to use the LD70D if it is part of a project using a range of Lightgraphix products.


# LD70, LD70-OP & LD70D

Ultra Shallow Recessed Shelf Light




Data sheet - Page 3

## Shallow Recessed Void


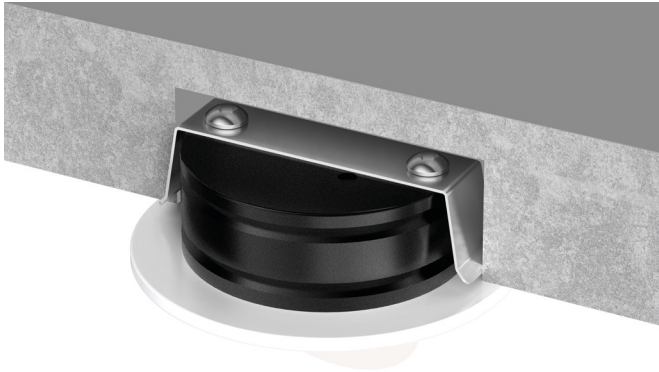


## Finish Options

High quality machined bezel available in paint finish white (RAL 9016) / silver / black / RAL / antique bronze / satin antique brass. Other paint finishes available. Contact our sales team for further details.

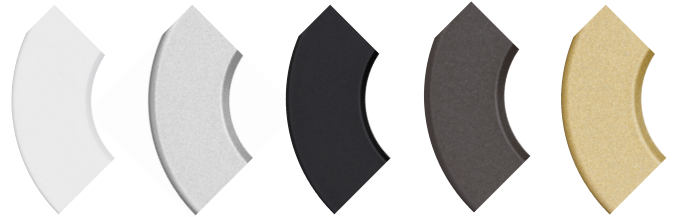

## Product Family

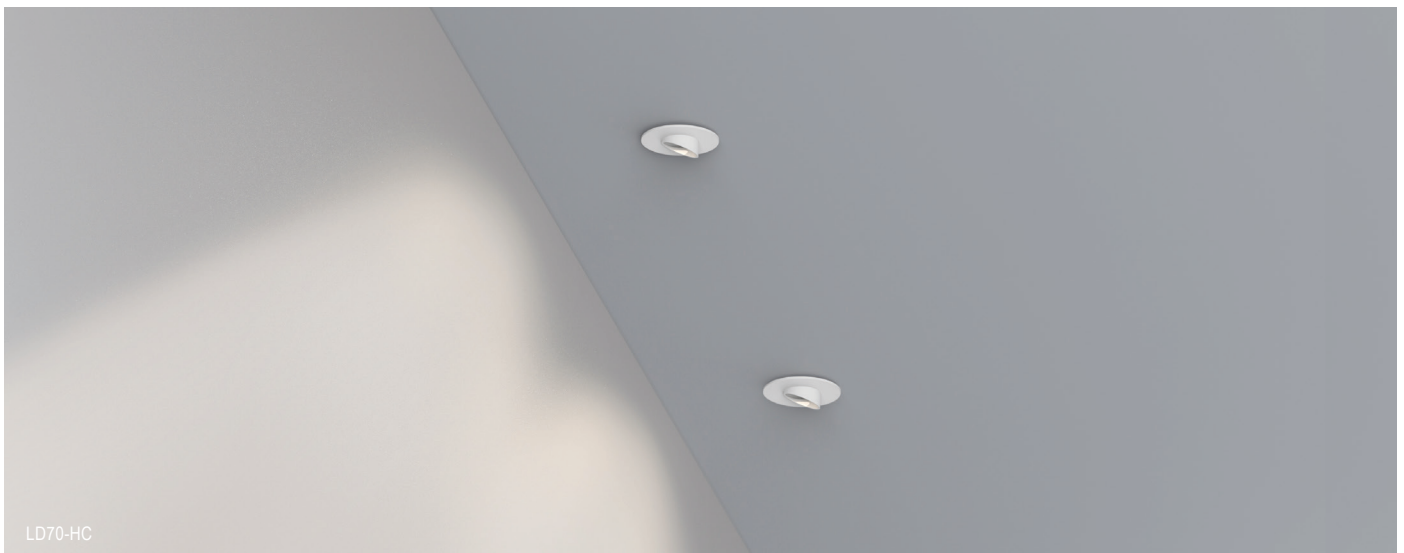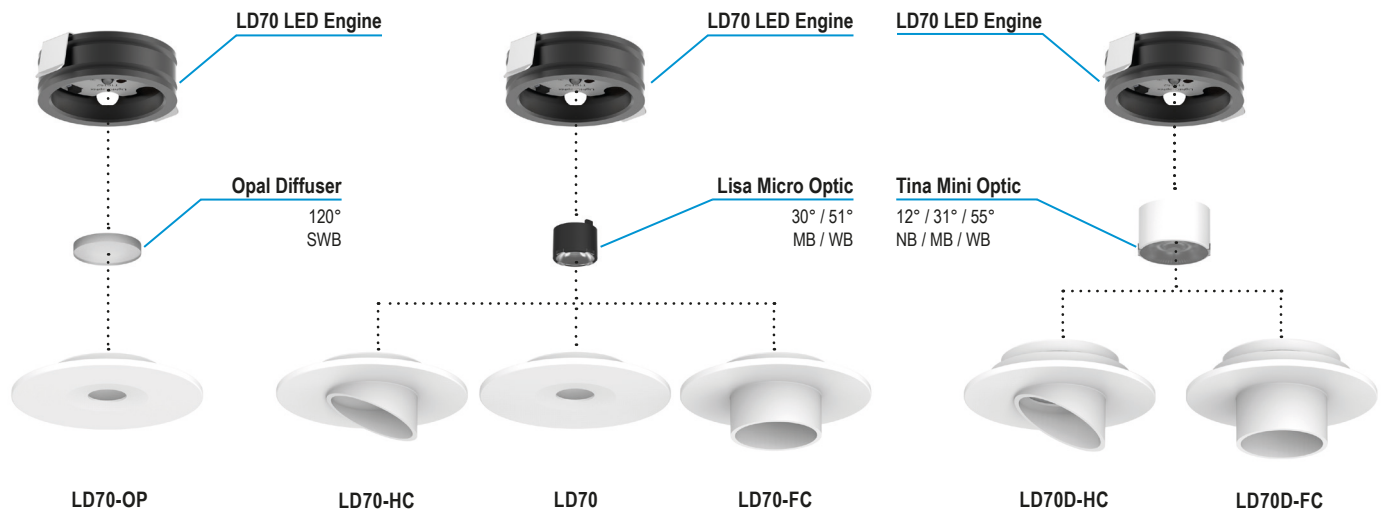


# LD70, LD70-OP & LD70D

Ultra Shallow Recessed Shelf Light

Data sheet - Page 4



### LD70



Product code	LED colour	Lens angle	Bezel finish
LD70-C1 - 350 - 500 - 700			

Example: LD70-C1-350 / LW30 / MB / RAL 9001

**Product codes with output options**

350mA	LD70-C1-350	500mA	LD70-C1-500	700mA	LD70-C1-700
1.2W	LD70-HC-C1-350	1.7W	LD70-HC-C1-500	2.4W	LD70-HC-C1-500
	LD70-FC-C1-350		LD70-FC-C1-500		LD70-FC-C1-700

**LED colour options**

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K)	/LW40
Cool White (5000K)	/LW50

**Beam / lens angle options**


30° Medium	/MB
51° Wide	/WB

**Finish options**

Bezel - paint finish white (RAL 9016) / silver / black / RAL / antique bronze / antique brass  
See our finishes guide for more detailed information on available finishes

**Driver requirements** - See LD70-OP table for driver information

### LD70-OP



Product code	LED colour	Bezel finish
LD70-OP-C1 - 350 - 500 - 700		

Example: LD70-OP-C1-350 / LW30 / RAL 9001

**Product codes with output options**

350mA	LD70-OP-C1-350	500mA	LD70-OP-C1-500	700mA	LD70-OP-C1-700
1.2W	LD70-OP-C1-350	1.7W	LD70-OP-C1-500	2.4W	LD70-OP-C1-700

**LED colour options**

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K)	/LW40
Cool White (5000K)	/LW50


**Finish options**

Bezel - paint finish white (RAL 9016) / silver / black / RAL / antique bronze / antique brass  
See our finishes guide for more detailed information on available finishes

**Use with 350mA, 500mA and 700mA constant current LED drivers**

We have a wide range of dimmable LED drivers, 0-10V, DMX, DALI and Mains dimmable. Please see the downloads section on our website:  
To run 1-14 LD70\*\*-C1-350 in series use a TXDEL350D (0-10V dimmable)  
To run 1-14 LD70\*\*-C1-500 in series use a TXDEL500D (0-10V dimmable)  
To run 1-13 LD70\*\*-C1-700 in series use a TXDEL700D (0-10V dimmable)

### LD70D



Product code	LED colour	Lens angle	Bezel finish
LD70D-C1 - 350 - 500 - 700			

Example: LD70D-C1-350 / LW30 / MB / RAL 9001

**Product codes with output options**

350mA	LD70D-HC-C1-350	500mA	LD70D-HC-C1-500	700mA	LD70D-HC-C1-700
1.2W	LD70D-FC-C1-350	1.7W	LD70D-FC-C1-500	2.4W	LD70D-FC-C1-700

**LED colour options**

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K)	/LW40
Cool White (5000K)	/LW50

**Beam / lens angle options**

12° Narrow Spot	/NB
31° Medium	/MB
55° Wide	/WB

**Finish options**

Bezel - paint finish white (RAL 9016) / silver / black / RAL / antique bronze / antique brass  
See our finishes guide for more detailed information on available finishes

**Driver requirements** - See LD70-OP table for driver information