



LD790

ADJUSTABLE COMPACT INTERIOR/ EXTERIOR LED DOWNLIGHT

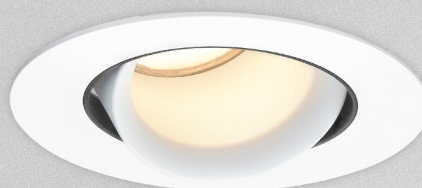

The compact LD790 has an excellent size to output ratio that is ideal for general downlighting and the highlighting of walls and columns within interior, exterior and marine applications. Featuring a wide range of paint finish options, the aluminium bezel has a diameter of just 60mm and houses a deep recessed optic for ultra low glare. The adjustable lens assembly can be tilted up to 30° to allow ultimate flexibility when focusing the product. Available LED engines include E3 and F1, offering colour temperatures of 2200K-5000K and a variety of beam angles, including a tight 12° narrow beam and medium options for general downlighting. Though compact, the LD790 provides brilliant thermal and light output performance, with a single optic generating a superior beam shape and no multiple shadows.

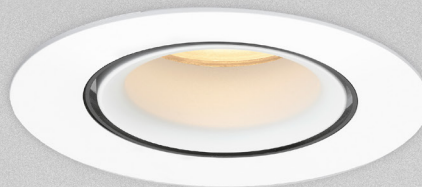


KEY FEATURES

- > Very low glare with deep recessed optic set back 26mm
- > Black anti-glare ring (see diagram) to prevent glare when tilted
- > Single optic for superior beam shapes with no multiple shadows
- > Compact powerful fitting delivering 433lm in 3000K
- > Tight 12° narrow spot beam available
- > Machined aluminium bezel available in a wide range of finishes; White (RAL 9016), Black (RAL 9005), Silver, Antique Bronze, Satin Antique Brass, Satin Brass, Anthracite Grey (RAL 7016) or any RAL paint finish
- > 30° tilt adjustability for ultimate flexibility
- > Versatile fitting rated IP65, ideal for interior and exterior projects including marine, hospitality and residential general downlighting, column and wall washing
- > Features our E3 & F1 LED engines which are used across our uplight and surface mounted products enabling colour and beam consistency across a project
- > E3 engine features reverse polarity protection
- > F1 COB engine with super warm 2200K option and 90+ CRI
- > Switched, 0-10V, Casambi, DMX, DALI, or Mains dimmable drivers available





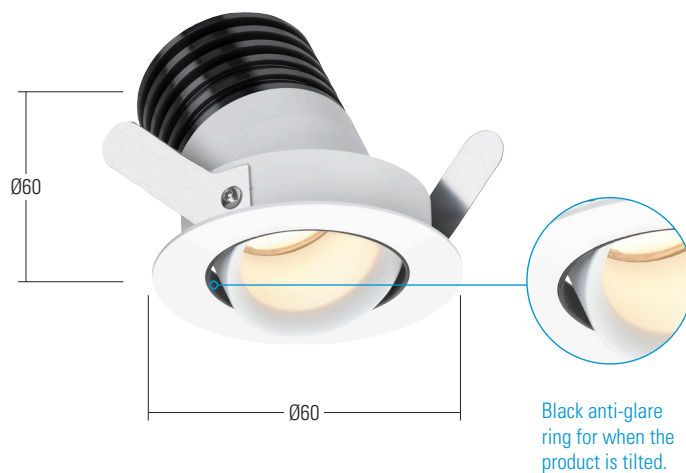

DIMENSIONS

Dimensions in mm

For fitting dimensions please go to page 3.



LED ENGINE SPECIFICATION

Engine	 E3		 F1		
Beam angles	12°, 26°		21°, 28°		
LED manufacturer	NICHIA		CREE		
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K		2200K, 2700K, 3000K, 4000K, 5000K		
Current	350mA [5W]	500mA [7]	350mA [3.5W]	500mA [5W]	700mA [7W]
LED power (Max)	4.2	6.0	3.2W	4.5W	6.3W
Delivered lumens (L ₁₀₀)	328	433	256	330	420
Lumens per circuit watt	66	62	81	73	67
CRI (Typ)	85		90		
Forward voltage (V ₁₀₀)	14V		9V		
Colour consistency	2 SDCM		3 SDCM		
Peak intensity	4,359 cd		2,201 cd		
LED lumens (at max output)	596		715		
LOR	0.73		0.59		
TM30	RF86 RG98		RF90.1 RG102.2		
UGR***	12.8		18.6		
LED lifetime	L90B5 at 90,000hrs		L80B5 at 80,000hrs		
Applications	   				

These values are based around a LD790-E3-500-LW30-NB & LD790-F1-700-LW30-MSB

*Lumen output data applies to all colour temperatures

**indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver


*** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

		350mA	500mA	700mA
Ambient temperature ● 55°C	⊕ E3	-20°C to 55°C	-20°C to 35°C	-
	⊙ F1	-20°C to 55°C	-20°C to 40°C*	-20°C to 40°C*
Glass	Low iron clear glass, 1mm thick			
Materials	Aluminium bezel, black anodised aluminium body			
Weight of product	0.14kg			
IP rating	IP65			
Wiring	In-series constant current wiring (pre-wired with cables at a length of 190mm)			

*When used in a 120x120x70 void

ENVIRONMENTAL

TM65	Available on request	
TM66	2.5	
Repair + Refurbish	 <p>This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.</p>	

AVAILABLE FINISHES

Please refer to our finishes guide for full details

The LD790 bezel is machined from aluminium and painted in-house at LightGraphix. Wet spray paint finishes are suitable for interior, exterior and high saline marine environments. Our standard colours are below but we can accommodate any RAL request.



WHITE (RAL 9016)




BLACK (RAL 9005)



SILVER ANODISED



ANTIQUE BRONZE




SATIN ANTIQUE BRASS



SATIN BRASS



ANTHRACITE GREY (RAL 7016)






RAL

DIMENSIONS & FIXING OPTIONS

Dimensions in mm

2 x spring clips are supplied as standard and provide a simple single-fix mounting method. Suitable for use in surfaces with a thickness of 5mm – 25mm.

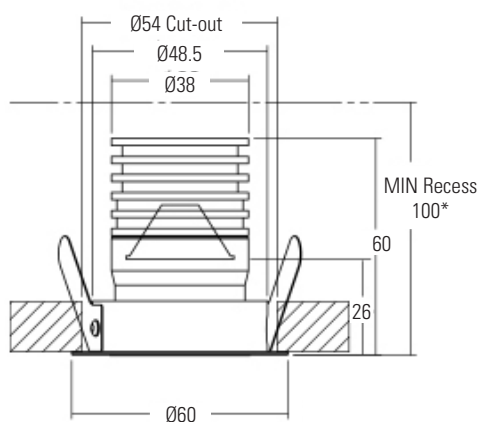

*see ceiling requirements table for more information

CONE DIAGRAMS

E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 500mA, 7W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD790 product page on the website.

Narrow Spot Beam
500mA using a 12° optic

Distance (m)	Illuminance (lx)
0.5	0.13
1.0	0.25
1.5	0.38
2.0	0.51
2.5	0.63
3.0	0.76

Cone Width (m)

Medium Beam
500mA using a 26° optic

Distance (m)	Illuminance (lx)
0.5	0.24
1.0	0.48
1.5	0.71
2.0	0.95
2.5	1.19
3.0	1.43

Cone Width (m)

F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 7W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD790 product page on the website.

Medium Spot Beam
700mA using a 21° optic

Distance (m)	Illuminance (lx)
0.5	0.19
1.0	0.38
1.5	0.57
2.0	0.76
2.5	0.94
3.0	1.13

Cone Width (m)


Medium Beam
700mA using a 28° optic

Distance (m)	Illuminance (lx)
0.5	0.25
1.0	0.51
1.5	0.76
2.0	1.01
2.5	1.27
3.0	1.52

Cone Width (m)

CEILING VOID REQUIREMENTS

Installation requirements can vary but the minimum installation volume requirements must be adhered to. The volume of air within the void ensures that the thermal performance of the product is not compromised and that proper cooling of the LED can take place. The minimum void height is 100mm.

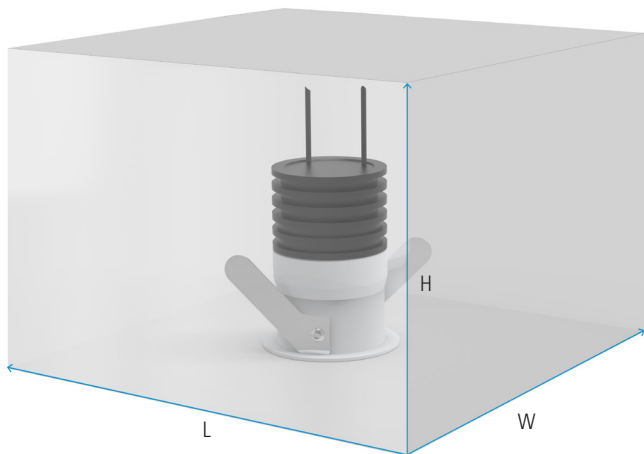

E3 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm ³	Litre(s)
LD790-E3-350	200 x 200 x 70	2800cm ³	2.8
LD790-E3-500	200 x 200 x 100	4000cm ³	4

F1 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm ³	Litre(s)
LD790-F1-350	200 X 200 X 70	2800cm ³	2.8
LD790-F1-500			
LD790-F1-700	200 X 200 X 100	4000cm ³	4

ORDER CODES & OPTIONS

Example: LD790-E3-500/LW30/NB/Paint Finish White

Light Engine & Drive Current		LED Colour		Beam Angle		Finish
LD790 -						
Ambient temperature key: ● 55°C						
<div><div></div><div>E3</div></div>						
5W LED at 350mA	LD790-E3-350	Super Warm White (2200K)	/LW22	12° Narrow spot	/NB	<div><div></div><div>Paint Finish White (RAL 9016)</div></div>
7W LED at 500mA	LD790-E3-500	Extra Warm White (2700K)	/LW27	26° Medium	/MB	
		Warm White (3000K)	/LW30			<div><div></div><div>Paint Finish Black (RAL 9005)</div></div>
		White (4000K) - on request	/LW40			
		Cool White (5000K)	/LW50			<div><div></div><div>Paint Finish Silver Anodised</div></div>
<div><div></div><div>F1</div></div>						
3.5W LED at 350mA	LD790-F1-350	Super Warm White (2200K)	/LW22	21° Medium spot	/MSB	<div><div></div><div>Paint Finish Antique Bronze</div></div>
5W LED at 500mA	LD790-F1-500	Extra Warm White (2700K)	/LW27	28° Medium	/MB	
		Warm White (3000K)	/LW30			<div><div></div><div>Paint Finish Satin Antique Brass</div></div>
		White (4000K) - on request	/LW40			
		Cool White (5000K)	/LW50			<div><div></div><div>Paint Finish Satin Brass</div></div>
						<div><div></div><div>Paint Finish Anthracite Grey (RAL 7016)</div></div>
						<div><div></div><div>Paint Finish RAL</div></div>

Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers
We have a wide range of LED drivers available. Please see the downloads section of our website.

Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers
We have a wide range of LED drivers available. Please see the downloads section of our website.