



LD792

ADJUSTABLE COMPACT INTERIOR/ EXTERIOR 2-TONE LED DOWNLIGHT

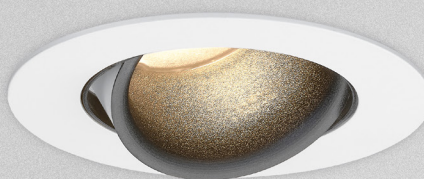

The compact LD792 has an excellent size to output ratio with a deep recessed LED that is ideal for general downlighting and the highlighting of walls and columns within interior, exterior and marine applications. Featuring as standard a matt black inner baffle for ultra-low glare, this along with the bezel can be painted in a wide range of colours offering endless styling options to suit your design scheme requirements. The adjustable lens assembly can be tilted up to 30° to allow ultimate flexibility when focusing the product. Available LED engines include E3 and F1, offering colour temperatures of 2200K-5000K and a variety of beam angles, including a tight 12° narrow beam with medium options for more general downlighting. Though compact, the LD792 provides brilliant thermal and light output performance, with a single optic generating a superior beam shape and no multiple shadows.

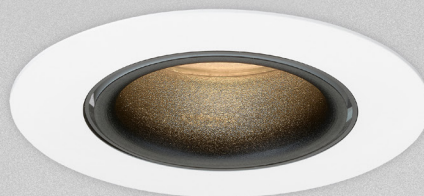


KEY FEATURES

- > Very low glare with a deep recessed optic set back 26mm
- > Black anti-glare ring (see diagram) to prevent glare when tilted
- > Single optic for superior beam shape with no multiple shadows
- > Matt black, low glare inner baffle is supplied as standard and can be painted in a colour of choice
- > Compact powerful fitting delivering 414lm in 3000K
- > Tight 12° narrow spot beam available
- > Machined aluminium bezel available in a wide range of finishes; White (RAL 9016), Black (RAL 9005), Silver, Antique Bronze, Satin Antique Brass, Satin Brass, Anthracite Grey (RAL 7016) or any RAL paint finish
- > 30° tilt adjustability for ultimate flexibility
- > Versatile fitting rated IP65, ideal for interior and exterior projects including marine, hospitality and residential general downlighting, column and wall washing
- > Features our E3 & F1 LED engines which is used across our uplight and surface mounted products enabling colour and beam consistency across a project
- > E3 engine features reverse polarity protection
- > F1 COB engine with super warm 2200K option and 90+ CRI
- > Switched, 0-10V, Casambi, DMX, DALI, or Mains dimmable drivers available




DIMENSIONS

Dimensions in mm

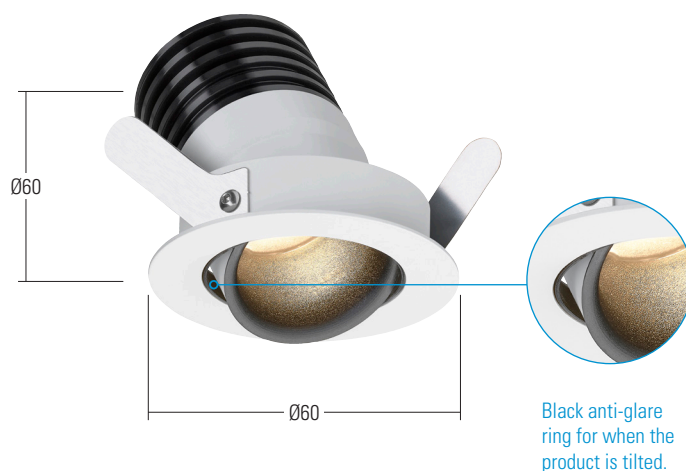For fitting dimensions please go to page 3.



LED ENGINE SPECIFICATION

Engine	 E3	 F1
Beam angles	12°, 26°	21°, 28°
LED manufacturer	NICHIA	CREE
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K	2200K, 2700K, 3000K, 4000K, 5000K
Current	350mA	350mA
LED power (Max)	4.2W (5W**)	3.2W (3.5W**)
Delivered lumens (L ₁₀₀)	309	235
Lumens per circuit watt	62	81
CRI (Typ)	85	90
Forward voltage (V ₁₀₀)	14V	9V
Colour consistency	2 SDCM	3 SDCM
Peak intensity	4233 cd	2076 cd
LED lumens (at max output)	596	715
LOR	0.69	0.54
TM30	86	90.1
UGR***	7.9	10.3
LED lifetime	L90B5 at 90,000hrs	L80B5 at 80,000hrs
Applications		

These values are based around a LD792-E3-500-LW30-NB & LD790-F1-700-LW30-MSB

*Lumen output data applies to all colour temperatures

**indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

*** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

Ambient temperature	-20°C to 45°C (350mA) or -20°C to 35°C (500mA)
Glass	Low iron clear glass, 1mm thick
Materials	Aluminium bezel, black anodised aluminium body
Weight of product	0.14kg
IP rating	IP65
Wiring	In-series constant current wiring (pre-wired with cables at a length of 190mm)

ENVIRONMENTAL

TM65	Available on request
TM66	2.5

AVAILABLE FINISHES

Please refer to our finishes guide for full details

The LD792 bezel is machined from aluminium and painted in-house at LightGraphix. Wet spray paint finishes are suitable for interior, exterior and high saline marine environments. Our standard colours are below but we can accommodate any RAL request.



WHITE (RAL 9016)




BLACK (RAL 9005)



SILVER ANODISED



ANTIQUE BRONZE




SATIN ANTIQUE BRASS



SATIN BRASS






ANTHRACITE GREY (RAL 7016)



RAL


2-TONE PAINTING (BLACK BAFFLE FINISH OPTIONS)

As standard the inner baffle is supplied in a low glare matt black textured finish but can also be painted in a colour of choice to offer complete design scheme flexibility. When specifying your order codes and options, please indicate a bezel finish as well as inner baffle colour. A fixed version of this product, the LD782 is available.



PAINT FINISH NOTE


The outer baffle finish matches the bezel finish which can be seen when the product is tilted.

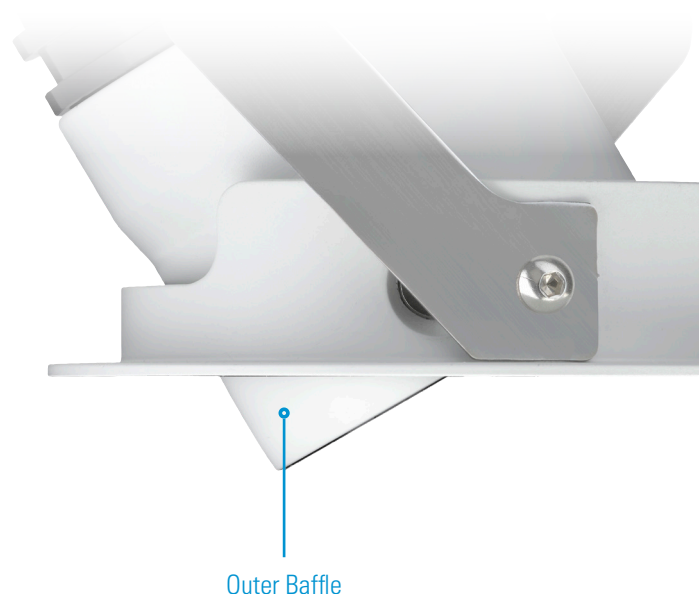



DIMENSIONS & FIXING OPTIONS

Dimensions in mm

2 x spring clips are supplied as standard and provide a simple single-fix mounting method. Suitable for use in surfaces with a thickness of 5mm – 25mm.

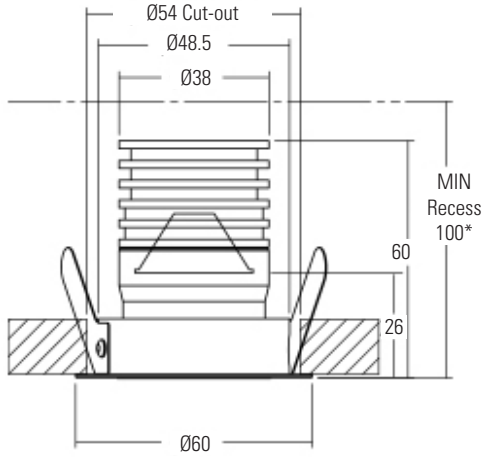

*see ceiling requirements table for more information

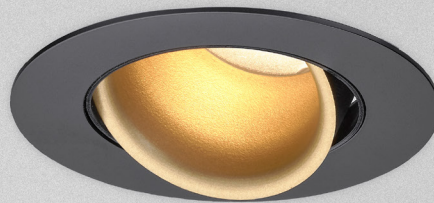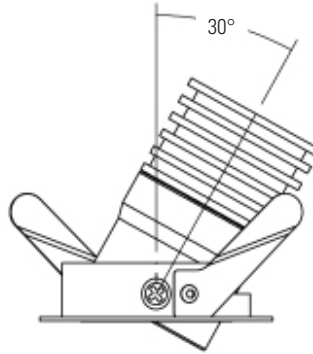

CONE DIAGRAMS

E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 500mA, 7W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD792 product page on the website.

Narrow Spot Beam 500mA using a 12° optic

Distance (m)	Beam Diameter (m)	Illuminance (lx)
0.5	0.13	16823
1.0	0.26	4206
1.5	0.39	1869
2.0	0.52	1051
2.5	0.65	673
3.0	0.78	467

Cone Width (m)

Medium Beam 500mA using a 26° optic

Distance (m)	Beam Diameter (m)	Illuminance (lx)
0.5	0.24	5489
1.0	0.49	1372
1.5	0.73	610
2.0	0.98	343
2.5	1.22	220
3.0	1.46	152

Cone Width (m)

F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 7W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD792 product page on the website.

Medium Spot Beam 700mA using a 21° optic

Distance (m)	Beam Diameter (m)	Illuminance (lx)
0.5	0.20	8423
1.0	0.40	2106
1.5	0.60	936
2.0	0.80	526
2.5	1.00	337
3.0	1.20	234

Cone Width (m)


Medium Beam 700mA using a 28° optic

Distance (m)	Beam Diameter (m)	Illuminance (lx)
0.5	0.25	5504
1.0	0.51	1376
1.5	0.76	612
2.0	1.02	344
2.5	1.27	220
3.0	1.53	153

Cone Width (m)

CEILING VOID REQUIREMENTS

Installation requirements can vary but the minimum installation volume requirements must be adhered to. The volume of air within the void ensures that the thermal performance of the product is not compromised and that proper cooling of the LED can take place. The minimum void height is 100mm.

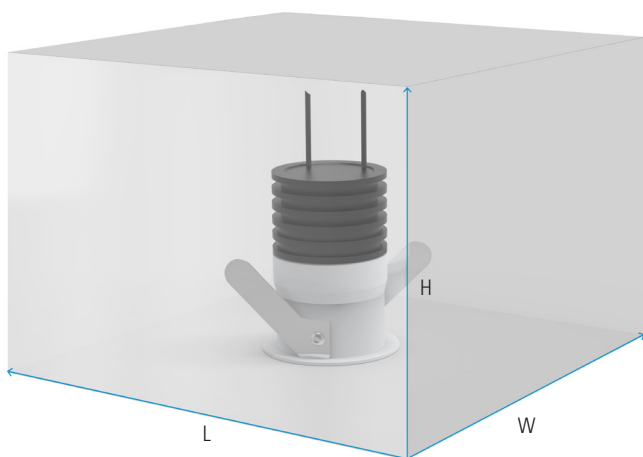

















































E3 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm³	Litre(s)
LD792-E3-350	200 x 200 x 70	2800cm³	2.8
LD792-E3-500	200 x 200 x 100	4000cm³	4

F1 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm³	Litre(s)
LD792-F1-350	200 X 200 X 70	2800cm³	2.8
LD792-F1-500			
LD792-F1-700	200 X 200 X 100	4000cm³	4

ORDER CODES & OPTIONS

Example: LD792-E3-500 / LW30 / NB / WHITE / BLACK

Light Engine & Drive Current		LED Colour		Beam Angle		Bezel Finish		Inner Baffle Finish																																																																																																																																			
LD792 -																																																																																																																																											
<div> <div>⊕ E3</div> <table border="1"> <tr> <td>5W LED at 350mA</td> <td>LD792-E3-350</td> <td>Super Warm White (2200K)</td> <td>/LW22</td> <td>12° Narrow spot</td> <td>/NB</td> <td></td> <td>White (RAL 9016)</td> <td></td> <td>Matt Black (Standard)</td> </tr> <tr> <td>7W LED at 500mA</td> <td>LD792-E3-500</td> <td>Extra Warm White (2700K)</td> <td>/LW27</td> <td>26° Medium</td> <td>/MB</td> <td></td> <td>Black (RAL 9005)</td> <td></td> <td>White (RAL 9016)</td> </tr> <tr> <td></td> <td></td> <td>Warm White (3000K)</td> <td>/LW30</td> <td></td> <td></td> <td></td> <td>Silver Anodised</td> <td></td> <td>Silver Anodised</td> </tr> <tr> <td></td> <td></td> <td>White (4000K) - on request</td> <td>/LW40</td> <td></td> <td></td> <td></td> <td>Antique Bronze</td> <td></td> <td>Antique Bronze</td> </tr> <tr> <td></td> <td></td> <td>Cool White (5000K)</td> <td>/LW50</td> <td></td> <td></td> <td></td> <td>Satin Antique Brass</td> <td></td> <td>Satin Antique Brass</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Satin Brass</td> <td></td> <td>Satin Brass</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Anthracite Grey (RAL 7016)</td> <td></td> <td>Anthracite Grey (RAL 7016)</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>RAL</td> <td></td> <td>RAL</td> </tr> </table> </div> <div> <div>⦿ F1</div> <table border="1"> <tr> <td>3.5W LED at 350mA</td> <td>LD792-F1-350</td> <td>Super Warm White (2200K)</td> <td>/LW22</td> <td>21° Medium spot</td> <td>/MSB</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5W LED at 500mA</td> <td>LD792-F1-500</td> <td>Extra Warm White (2700K)</td> <td>/LW27</td> <td>28° Medium</td> <td>/MB</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7W LED at 700mA</td> <td>LD792-F1-700</td> <td>Warm White (3000K)</td> <td>/LW30</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>White (4000K) - on request</td> <td>/LW40</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>Cool White (5000K)</td> <td>/LW50</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table> </div>										5W LED at 350mA	LD792-E3-350	Super Warm White (2200K)	/LW22	12° Narrow spot	/NB		White (RAL 9016)		Matt Black (Standard)	7W LED at 500mA	LD792-E3-500	Extra Warm White (2700K)	/LW27	26° Medium	/MB		Black (RAL 9005)		White (RAL 9016)			Warm White (3000K)	/LW30				Silver Anodised		Silver Anodised			White (4000K) - on request	/LW40				Antique Bronze		Antique Bronze			Cool White (5000K)	/LW50				Satin Antique Brass		Satin Antique Brass								Satin Brass		Satin Brass								Anthracite Grey (RAL 7016)		Anthracite Grey (RAL 7016)								RAL		RAL	3.5W LED at 350mA	LD792-F1-350	Super Warm White (2200K)	/LW22	21° Medium spot	/MSB					5W LED at 500mA	LD792-F1-500	Extra Warm White (2700K)	/LW27	28° Medium	/MB					7W LED at 700mA	LD792-F1-700	Warm White (3000K)	/LW30									White (4000K) - on request	/LW40									Cool White (5000K)	/LW50						
5W LED at 350mA	LD792-E3-350	Super Warm White (2200K)	/LW22	12° Narrow spot	/NB		White (RAL 9016)		Matt Black (Standard)																																																																																																																																		
7W LED at 500mA	LD792-E3-500	Extra Warm White (2700K)	/LW27	26° Medium	/MB		Black (RAL 9005)		White (RAL 9016)																																																																																																																																		
		Warm White (3000K)	/LW30				Silver Anodised		Silver Anodised																																																																																																																																		
		White (4000K) - on request	/LW40				Antique Bronze		Antique Bronze																																																																																																																																		
		Cool White (5000K)	/LW50				Satin Antique Brass		Satin Antique Brass																																																																																																																																		
							Satin Brass		Satin Brass																																																																																																																																		
							Anthracite Grey (RAL 7016)		Anthracite Grey (RAL 7016)																																																																																																																																		
							RAL		RAL																																																																																																																																		
3.5W LED at 350mA	LD792-F1-350	Super Warm White (2200K)	/LW22	21° Medium spot	/MSB																																																																																																																																						
5W LED at 500mA	LD792-F1-500	Extra Warm White (2700K)	/LW27	28° Medium	/MB																																																																																																																																						
7W LED at 700mA	LD792-F1-700	Warm White (3000K)	/LW30																																																																																																																																								
		White (4000K) - on request	/LW40																																																																																																																																								
		Cool White (5000K)	/LW50																																																																																																																																								

Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers
We have a wide range of LED drivers available. Please see the downloads section of our website.