

LD1094

HIGH-POWER ADJUSTABLE EXTERIOR RECESSED LED DOWNLIGHT



The LD1094 is an IP67 rated high-power adjustable recessed downlight, designed for challenging marine environments. Featuring an innovative 360° rotating ball-joint, the deep recessed lens assembly can be positioned in any direction and tilted up to 25° for ultimate flexibility. After installation, focusing can be carried out quickly and glare control accessories interchanged by unscrewing the bezel, eliminating the need for the product to be removed from the mounting surface. With a shallow depth of just 67mm, this product is ideal for areas with a height restriction and provides a wide range of hidden fixing options to suit a variety of ceiling types. The LD1094 delivers in excess of 750lm and is available with an E3 or N1 LED engine, offering colour temperatures between 2200K-5000K, as well as several beam angles for multi-purpose use of the fitting throughout a project. This robust downlight solution ensures excellent thermal and light output performance that is built to last in harsh applications.




KEY FEATURES

- > Innovative 360° rotating ball-joint can be positioned in any direction and tilted up to 25° for ultimate flexibility when focusing onsite
- > Removable bezel for quick and easy on-site focusing once the product is installed
- > Very shallow depth, ideal for height restricted applications
- > Rated IP67 from the front and IP65 from the back
- > Interchangeable optics and glare control accessories including honeycomb louvre
- > Beam angles include 25° medium spot, 35° medium, 46° wide, 65° extra wide and a 22° x 43° oval beam
- > E3 and N1 LED engines available, producing up to 755 lumens in 3000K at 700mA
- > Single optic produces superior beam shape and no multiple shadows
- > High quality machined bezel available in: Polished & Passivated 316 Stainless Steel, 316 Stainless Steel, White (RAL 9016), Black (RAL 9005), Classic Bronze, Textured Mars Bronze, Textured Fir Green, Gunmetal Grey and any RAL colour
- > Various hidden fixing methods for multiple ceiling types
- >  Contains our integral moisture guard (anti-wicking barrier), stopping water ingress from going up the cable into the product from incorrect IP-rated connections
- > Switched, 0-10V, Casambi, DMX, DALI or Mains dimmable drivers available

DIMENSIONS

Dimensions in mm

For full dimensions please go to page 6

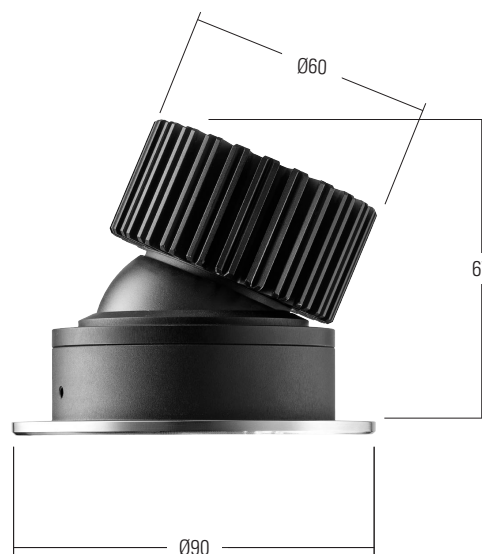

LED ENGINE SPECIFICATION

Engine	E3			N1		
Beam angles	12°, 20°, 34°, 55°, 12° x 49°			25°, 35°, 46°, 65°, 22° x 43°		
LED manufacturer	NICHIA			CREE		
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K			2200K, 2700K, 3000K, 4000K, 5000K		
Current	350mA [5W]	500mA [7W]	700mA [10W]	350mA [7W]	500mA [10W**]	700mA [14W]
LED power (Max)	4.2W	6W	8.4W	5.8W	9.3W	13.3W
Delivered lumens (L ₁₀₀)	381	467	579	431	586	755
Lumens per circuit watt	76	67	58	74	71	65
CRI (Typ)	85 90***			93		
Forward voltage (V ₁₀₀)	14V			18V		
Colour consistency	2 SDCM			2 SDCM		
Peak intensity	5,768 cd			2,690 cd		
LED Lumens	840lm			1393lm		
LOR	0.69			0.54		
TM30	RF85.7 RG98.3			RF90 RG102		
UGR****	10.4			13.9		
LED lifetime	L90B5 at 90,000hrs			L90B5 at 90,000hrs		
Applications	   					

These values are based around a LD1094-E3-700/830/NB and LD1094 -N1-700/930/MSB

*See lumen variance table to the right for N1 engine. E3 lumens apply across all colour temperatures

**Indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

***90 CRI available in 2700K/3000K only. Approx. 10% lumen drop will occur compared to 85 CRI variants

****UGR values based on room parameter of 4H 8H, C70 W50 F20

Lumen variance by CCT	
2200K	-7%
2700K	+/- 0%
4000K	+7%
5000K	+16%

MECHANICAL

		350mA	500mA	700mA
Ambient temperature ○ 55°C	⊕ E3	-20°C to 55°C	-20°C to 50°C	-20°C to 35°C
	⊙ N1	-20°C to 55°C	-20°C to 35°C	-20°C to 35°C
	AUS/NZ	-20°C to 25°C		
Glass	1mm thick, low iron glass			
Materials	Aluminium, Stainless Steel, Glass			
Weight of product	700g			
IP rating	IP67			
Wiring	External 2 core cable, 400mm			

ENVIRONMENTAL

Repair + Refurbish	 This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.
--------------------	--

AVAILABLE FINISHES

Please refer to our finishes guide for full details



316 STAINLESS STEEL

- > Marine grade 316 Stainless Steel
- > Standard machined finish
- > Extremely durable
- > Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation
- > Interior & exterior use



POLISHED & PASSIVATED 316 STAINLESS STEEL

- > Marine Grade 316 Stainless Steel
- > Pristine mirror like finish
- > Recommended for pools and marine applications
- > Extremely durable with very high corrosion resistance
- > Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments
- > Interior & exterior use



WHITE (RAL 9016)



BLACK (RAL 9005)



CLASSIC BRONZE (YM262E)



TEXTURED MARS BRONZE



TEXTURED FIR GREEN (RAL 6009)



GUNMETAL GREY (RAL 7021)



RAL

PAINT FINISH - POWDER COAT

- > The powder coated finish is very matt
- > Not recommended for high traffic in-ground applications, unless placed to one side where the bezel will not be walked on
- > Powder coat paint is generally used on stainless steel or anodised aluminium components
- > Interior and exterior use




ACCESSORIES AND GLARE CONTROL OPTIONS

The LD1094 allows adjustments to be made to the direction of the optic and interchangeable accessories after installation through removal of the bezel. The HT1094 hand tool (see page 5) should be used when unscrewing the bezel and tilting the lens assembly to avoid scratching the fitting.



ADJUSTABILITY


Featuring an innovative 360° rotating ball-joint, the lens assembly can be positioned in any direction and tilted up to 25° for ultimate flexibility when focusing on-site.

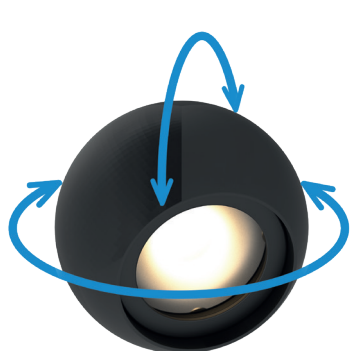

HT1094 HAND TOOL


/HT1094 Hand tool

The hand tool is required to unscrew the bezel and tilt the rotating ball-joint into the desired position for quick on-site focusing. The product can be tilted freehand, or with the supplied angle guide working in increments of 2.5° (from 0° up to 25°). The hand tool is completely plastic to prevent accidental scratches when opening and making adjustments. If commissioning a large group, then more than one tool may be required to allow multiple people to make adjustments at the same time. This tool is supplied separately and will be automatically quoted.

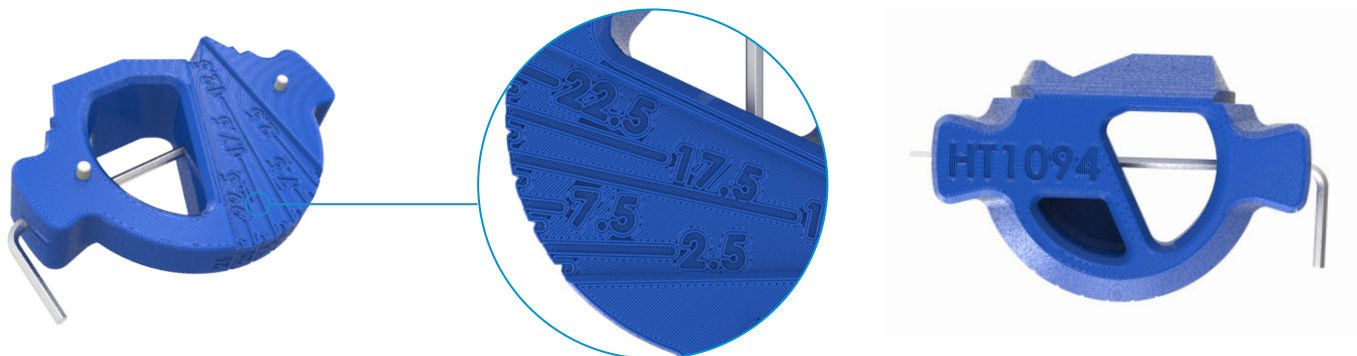


HOW TO USE THE HAND TOOL

- 1 Fit the pins on the HT1094 into the corresponding holes on the front bezel of the fitting and begin to unscrew the bezel.

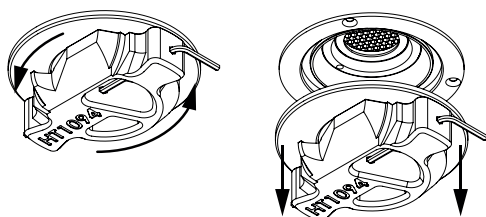


NOTE: Keep bezel clean


- 3 Always start in the level & upright position. Push towards the desired lit surface. If you overshoot, bring the LED back to the starting position before tilting again.

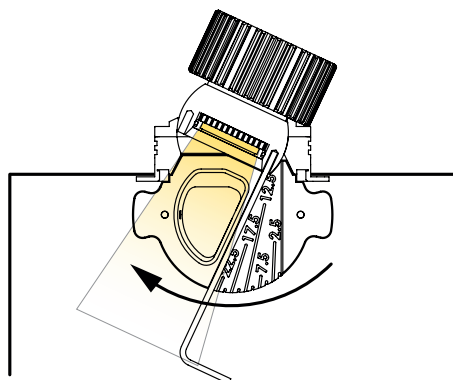

- 2 Place HT1094 into the LD1094 as shown. Using the provided Allen key or a 3mm screwdriver, push into module hole furthest away from the lit surface.

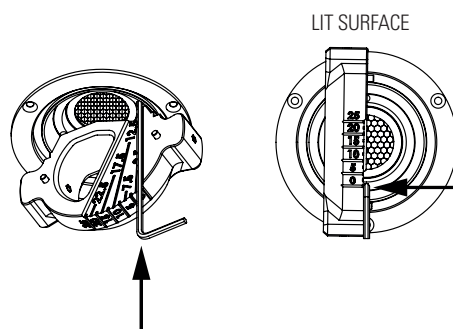





- 4 Make sure the inside of the bezel and glass is clean before refitting and replacing the bezel.

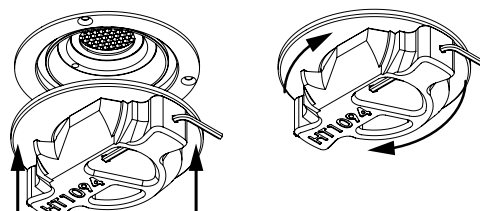

FIXING OPTIONS


/SM Screw Mount

Direct fitting to ceiling mounting method with the use of 3 hidden screws underneath the bezel, which is then screwed back on once fixing is complete. The fixing holes for the LD1094 are close to the cut-out diameter, so if the mounting surface isn't dense enough then there may be a risk of the fixing screws breaking out without the use of a ceiling ring (see CMR fixing on page 7).

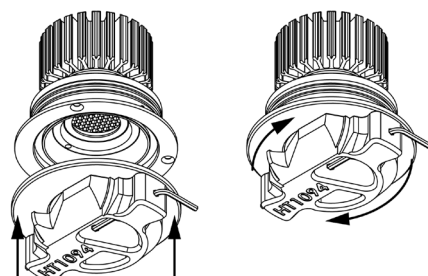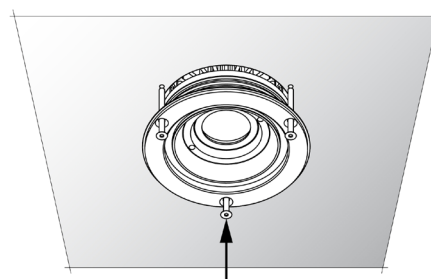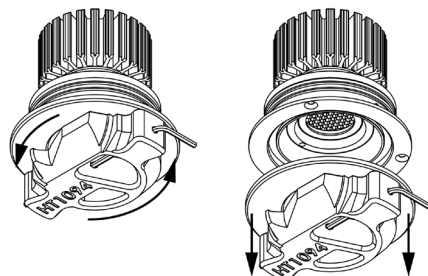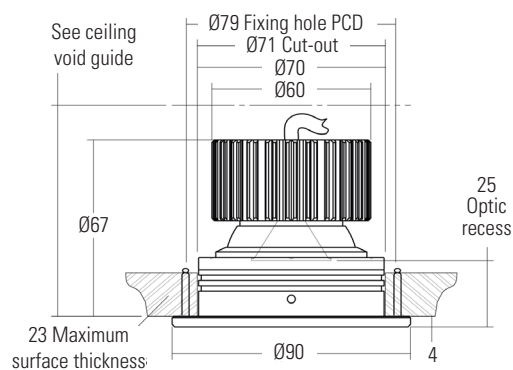

/CMR Ceiling Mount Ring

The ceiling mount ring is ideal for providing an extra secure fixing and is our recommended method. It can only be installed if there is access behind the mounting surface.

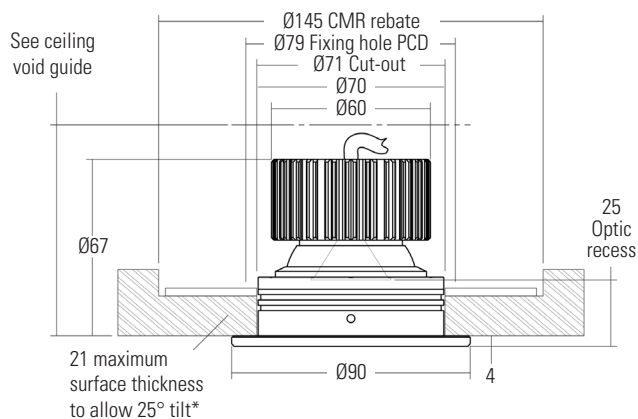




Why use the ceiling mount ring?

- > The fixing holes on the LD1094 bezel are close to the cut-out diameter, so if the mounting surface isn't rigid enough there may be a risk of the fixing screws breaking out without the use of a ceiling ring
- > The ceiling mount ring is manufactured from metal and has the threaded fixing holes pre-drilled
- > It provides a surface for the LD1094 to be fixed flush into the mounting surface

What is the thickness of the mounting surface?


The thickness of the mounting surface is important to how the ceiling ring is installed:

- > If this surface is 21mm in thickness then the ceiling ring can be fixed directly to the back of it
- > If the surface is thicker than 21mm then a rebate will need to be created to guarantee the bezel sits flush with the front surface

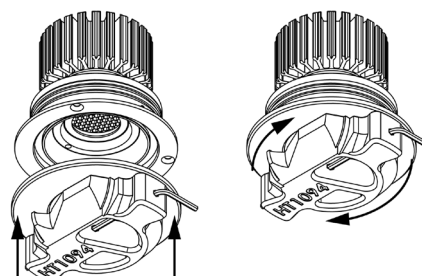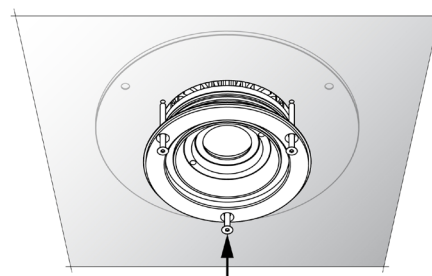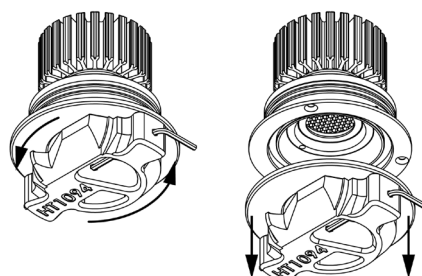

CEILING VOID REQUIREMENTS

Installation requirements can vary but the minimum installation volume requirements must be adhered to. The volume of air within the void ensures that the thermal performance of the product is not compromised and that proper cooling of the LED can take place. The minimum void height is 80mm.

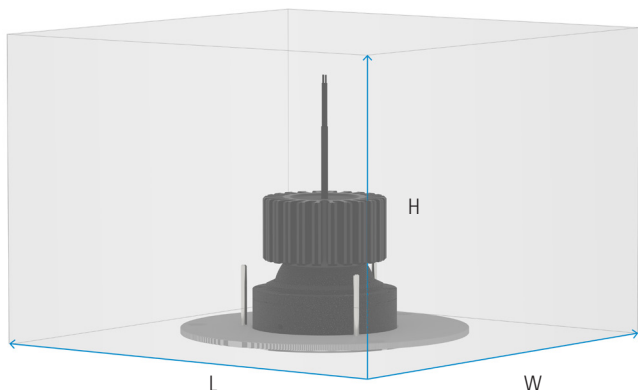

E3 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm ³	Litre(s)
350mA / 500mA	150 x 150 x 80	1800cm ³	1.8
700mA	200 x 200 x 150	6000cm ³	6


N1 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm ³	Litre(s)
350mA / 500mA	150 x 150 x 80	1800cm ³	1.8
700mA	250 x 250 x 150	9375cm ³	9.375

Note: At 700mA the minimum dimension between a wall, within the ceiling void and the edge of the fitting must be 70mm.

CONE DIAGRAMS


E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 700mA, 10W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD1094 product page on the website.

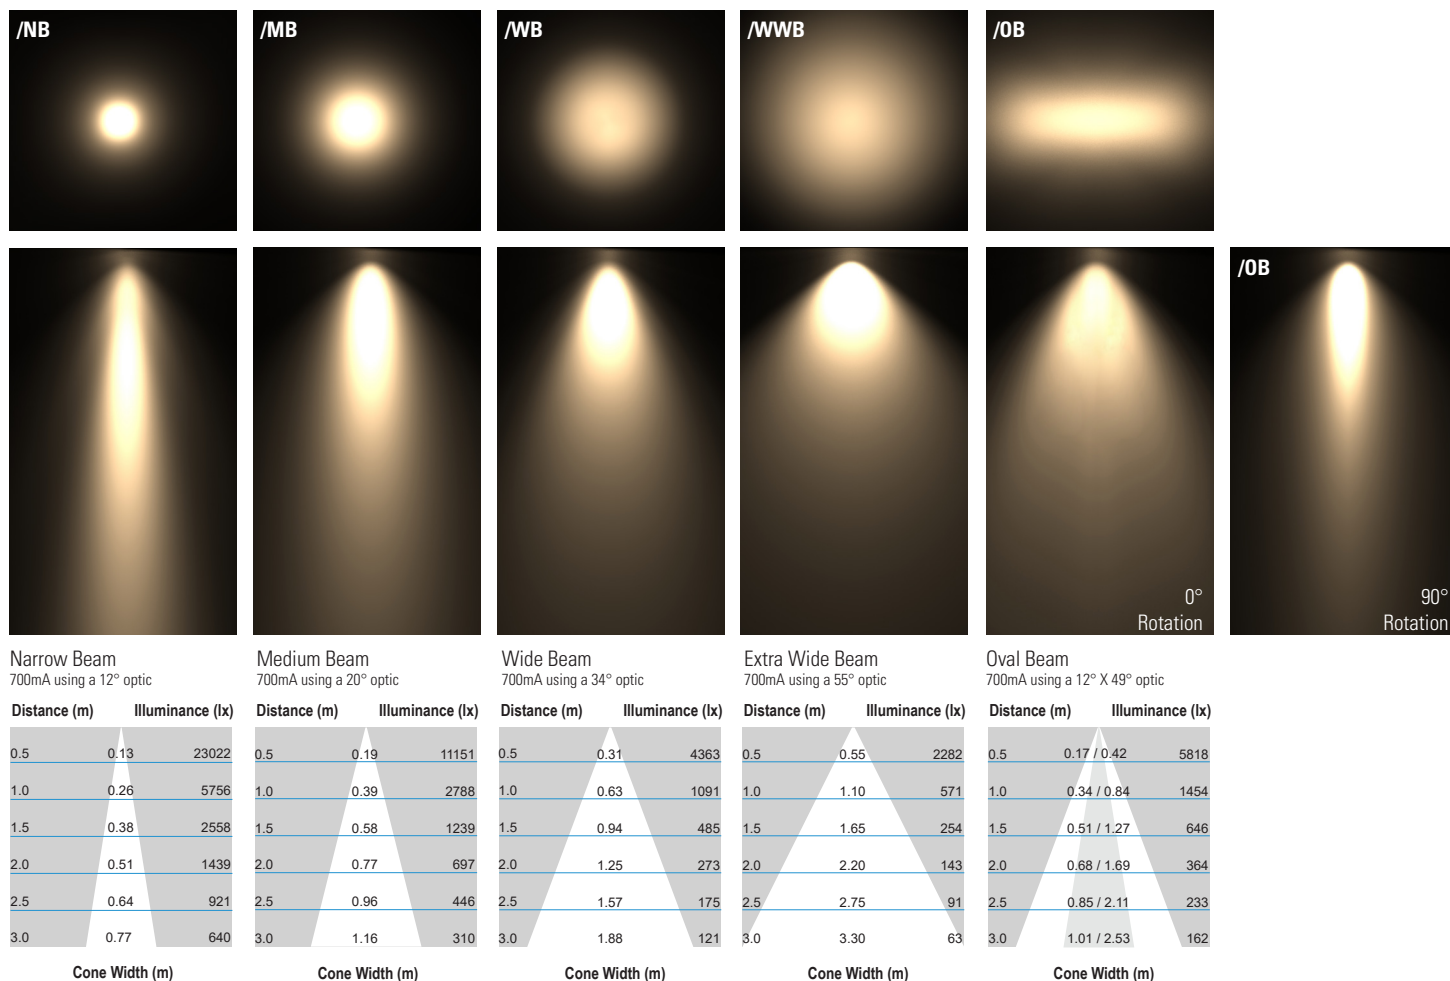

N1 LED Engine

Cone diagrams below are based on a 3000K N1 LED engine run at maximum output 700mA, 14W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD1094 product page on the website.

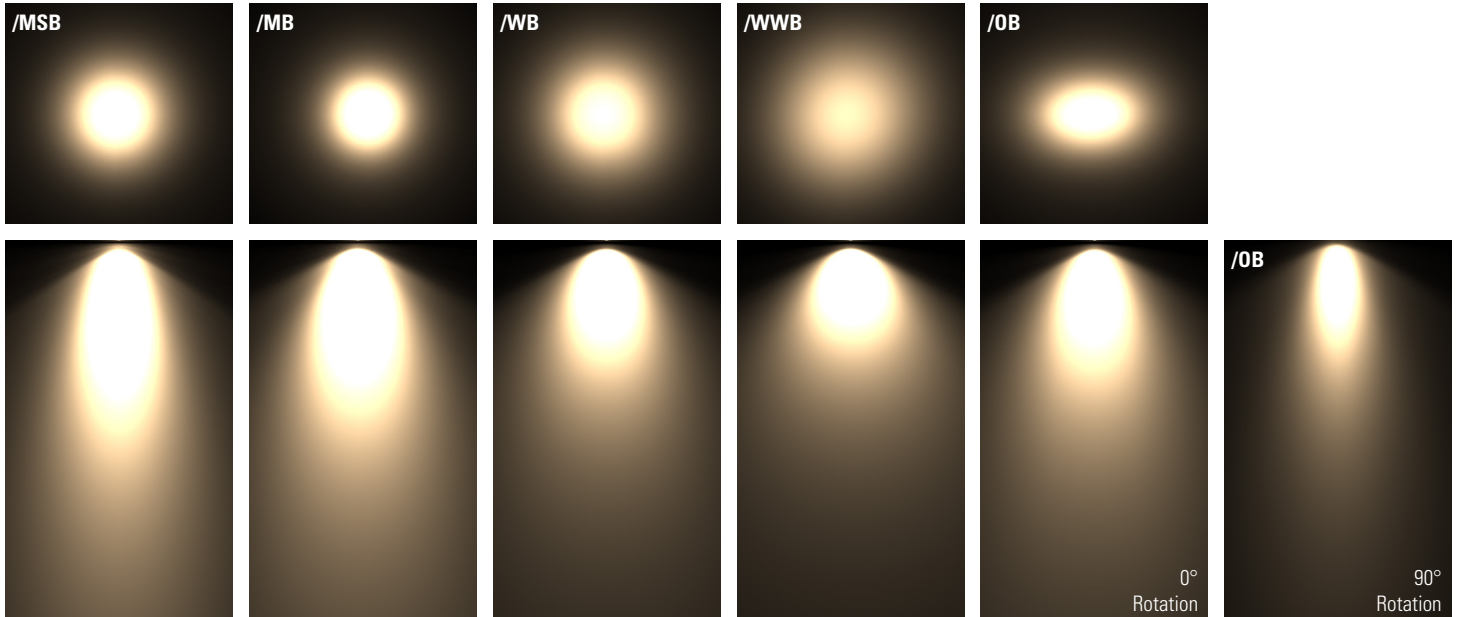

Medium Spot Beam
700mA using a 25° optic

Distance (m)	Illuminance (lx)	
0.5	0.23	33140
1.0	0.47	8285
1.5	0.70	3682
2.0	0.94	2071
2.5	1.17	1326
3.0	1.41	921

Cone Width (m)

Medium Beam
700mA using a 35° optic

Distance (m)	Illuminance (lx)	
0.5	0.30	13110
1.0	0.60	3277
1.5	0.91	1457
2.0	1.21	819
2.5	1.51	524
3.0	1.81	364

Cone Width (m)

Wide Beam
700mA using a 46° optic

Distance (m)	Illuminance (lx)	
0.5	0.40	5283
1.0	0.81	1321
1.5	1.21	587
2.0	1.62	330
2.5	2.02	211
3.0	2.42	147

Cone Width (m)

Extra Wide Beam
700mA using a 65° optic

Distance (m)	Illuminance (lx)	
0.5	0.61	2302
1.0	1.22	575
1.5	1.82	256
2.0	2.43	144
2.5	3.04	92
3.0	3.65	64

Cone Width (m)

Oval Beam
700mA using a 22° X 43° optic

Distance (m)	Illuminance (lx)	
0.5	0.39 / 0.22	8540
1.0	0.78 / 0.43	2135
1.5	1.16 / 0.65	949
2.0	1.55 / 0.86	534
2.5	1.94 / 1.08	342
3.0	2.33 / 1.30	237

Cone Width (m)

ORDER CODES & OPTIONS

EXAMPLE: LD1094-E3-700/830/NB/316 Stainless Steel/HL/CMR

Light Engine & Drive Current	LED colour	Beam angle	Finish	Fixing & accessories

Ambient temperature key: ● 55°C

E3

5W LED at 350mA*	LD1094-E3-350
7W LED at 500mA*	LD1094-E3-500
10W LED at 700mA*	LD1094-E3-700

***AUS/NZ:**
Add - AU - suffix to the product code e.g.
LD1094-AU-E3-350

2200K 85+ CRI	/822
2700K 85+ CRI	/827
3000K 85+ CRI	/830
4000K 85+ CRI on request	/840
5000K 85+ CRI	/850
2700K 90+ CRI	/927
3000K 90+ CRI	/930

12° Medium spot	/NB
20° Medium	/MB
34° Wide	/WB
55° Extra wide	/WWB
12° x 49° Oval	/OB

Polished & Passivated 316 Stainless Steel (for marine environments)
316 Stainless Steel
Paint Finish White (RAL 9016)

/CMR
/SM
/HL

N1

7W LED at 350mA*	LD1094-N1-350
10W LED at 500mA*	LD1094-N1-500
14W LED at 700mA*	LD1094-N1-700

***AUS/NZ:**
Add - AU - suffix to the product code e.g.
LD1094-AU-N1-350

2200K 93+ CRI	/922
2700K 93+ CRI	/927
3000K 93+ CRI	/930
4000K 93+ CRI on request	/940
5000K 93+ CRI	/950

25° Medium spot	/MSB
35° Medium	/MB
46° Wide	/WB
65° Extra wide	/WWB
22° x 43° Oval	/OB

Paint Finish Black (RAL 9005)
Paint Finish Classic Bronze (YM262E)
Paint Finish Textured Mars Bronze
Paint Finish Textured Fir Green (RAL 6009)
Paint Finish Gunmetal Grey (RAL 7021)
Paint Finish RAL

Drivers
Use with 350mA, 500mA & 700mA constant current LED drivers We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.