


LD154/LD154DO HIGH-POWER RECESSED EXTERIOR LED UPLIGHT



The LD154 is our most powerful fitting to date, delivering up to 1443lm from a minimal body depth of 71mm. It forms a new range of high-power uplight solutions for drive over, low glare (LD154DR) and asymmetric installations (LD154T). There are 3 LED engine options available. Our new P1 engine delivers the highest output, whilst the E3 offers an exceptional extra narrow beam of 9° and the N1, a 13° beam. The lens assembly features large 50mm optics which offer ultra-high efficiency, superior beam quality and low glare. Reaching heights of up to 14 metres, the LD154 demonstrates excellent size to output ratio and has been designed with a repairable engine, providing a robust circular solution for high-power uplight applications.

KEY FEATURES




- > New high-power P1 engine with CREE COB delivering upto 1443lm at 500mA in 3000K
- > E3 engine with NICHIA LED delivering up to 699lm at 700mA in 3000K, offering an exceptional 9° extra narrow beam with peak intensity reaching 15,922 cd
- > N1 engine with CREE COB delivering up to 1028lm at 700mA in 3000K offering a 13° narrow beam
- > Utilises large 50mm low glare optics, chosen for efficiency, quality of beam and ability to produce narrow beams at high outputs
- > Low glare product with a choice of accessories to minimise the view of the light source at various angles
- >  Contains our integral moisture guard (anti-wicking barrier), stopping water ingress from going up the cable into the product from incorrect IP-rated connections
- > Chamfered bezel available in 316 Stainless Steel, Polished & Passivated Stainless Steel, a wide range of powder coat paint finishes or any RAL colour
- > LD154DO has been designed for drive over applications with a thickened bezel and dedicated concrete housing to prevent rotation of the fitting
- > For applications requiring super low glare or an asymmetric beam, please view the LD154DR and LD154T data sheets
- > Switched, 0-10V, Casambi, DMX, DALI, or Mains dimmable drivers available

DIMENSIONS

For full dimensions please go to page 4.



WHITE LED ENGINE SPECIFICATION

Engine	E3			E3-90			N1			P1	
Beam angles	9°, 11°, 22°, 29°, 42°, 53°, 10° x 56°						13°, 24°, 31°, 45°, 54°, 13° x 58°			20°, 27°, 33°, 47°, 58°, 19° x 60°	
LED manufacturer	NICHIA						CREE			CREE	
Colour temperature	2200K, 2700K, 3000K, 4000K, 5000K			2700K, 3000K			2200K, 2700K, 3000K, 4000K, 5000K			2200K, 2700K, 3000K, 4000K, 5000K	
Current [Rated Output]	350mA [5W]			500mA [7W]			700mA [10W]			350mA [14W]	
Typical LED Circuit wattage	4.4W			6.4W			9.2W			13.3W	
Delivered lumens (L ₁₀₀)*	418			557			699			1050	
Delivered lm/Circuit W**	94			87			76			79	
Typical LED Source wattage	4W			5.8W			8.3W			12.0W	
Source LED lm	574			740			949			1449	
Source lm/W	144			128			114			121	
Forward voltage (V ₁₀₀)	11.3V			11.6V			11.8V			34.3V	
CRI	85			90			93			90	
Colour consistency	2 SDCM						2 SDCM			3 SDCM	
Peak intensity	15,922 cd						13,809 cd			10,624 cd	
LOR	0.74						0.81			0.73	
TM30	RF86 RG98						RF91 RF99			RF90 RG97	
UGR rating ('downlight' mounted)	6.4			7.4			8.2			8.6	
BUG rating ('uplight' mounted)	B0-U3-G0			B0-U4-G0			B0-U4-G0			B0-U5-G0	
LED lifetime	L90B5 at 90,000hrs										
Applications	  										

These values are based on LD154-E3-700-LW30-ENB, LD154-N1-700-LW30-NB and LD154-P1-700-LW30-NB

*See lumen variance table to the right for N1 engine. E3 lumens apply across all colour temperatures

**LED wattage includes losses associated with using a 90% efficient driver

Lumen variance by CCT	
2200K	-7%
2700K	+/- 0%
4000K	+7%
5000K	+16%

MECHANICAL


Ambient temperature 55°C	E3 / E3-90	Soil/Sleeve	350mA	500mA	700mA
		Concrete	-20°C to 55°C	-20°C to 55°C	-20°C to 40°C
	N1	Soil/Sleeve	-20°C to 55°C	-20°C to 50°C	-20°C to 25°C
		Concrete	-20°C to 55°C	-20°C to 55°C	-20°C to 45°C
	P1	Soil/Sleeve	-20°C to 25°C	N/A	-
		Concrete	-20°C to 45°C	-20°C to 25°C	-
	Glass				
	8mm thick, low iron glass				
Materials		Black hard anodised aluminium body, 316 Stainless Steel bezel			
Weight of product		0.68kg			
IP rating		IP67			
IK rating		IK08			
Wiring		In-series constant current wiring (pre-wired with 2 core cable at a length of 250mm)			

ENVIRONMENTAL

TM65	Available on request	
TM66	2.5	
Repair + Refurbish	 <p>This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.</p>	

AVAILABLE FINISHES

Please refer to our finishes guide for full details

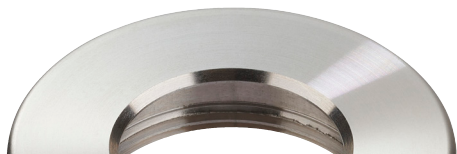

316 STAINLESS STEEL

- > Marine grade 316 Stainless Steel
- > Standard machined finish
- > Extremely durable
- > Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation
- > Interior & exterior use



POLISHED & PASSIVATED 316 STAINLESS STEEL

- > Marine Grade 316 Stainless Steel
- > Pristine mirror like finish
- > Recommended for pools and marine applications
- > Extremely durable with very high corrosion resistance
- > Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments
- > Interior & exterior use

PAINT FINISH - POWDER COAT

- > The powder-coated finish has a very matte appearance.
- > Not recommended for high traffic in-ground applications, unless placed to one side where the bezel will not be walked on
- > Powder coat paint is generally used on stainless steel or anodised aluminium components



WHITE
(RAL 9016)



BLACK
(RAL 9005)



CLASSIC BRONZE
(YM262E)



TEXTURED MARS BRONZE



TEXTURED FIR GREEN
(RAL 6009)



GUNMETAL GREY
(RAL 7021)




RAL COLOURS

DIMENSIONS AND FIXING OPTIONS

Dimensions in mm


/SC Spring clips

Suitable for use in surfaces with a thickness of 1mm – 25mm. Spring clips provide a simple, single fix mounting method. We recommend that spring clips are only used in interior applications.

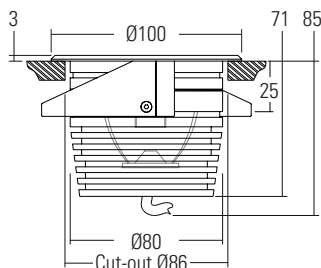


/485S Fixing sleeve and O-rings

Acetal sleeve is bonded into the mounting surface first and the fitting is held in with O-rings. We recommend this method for mounting in exterior in-ground applications.

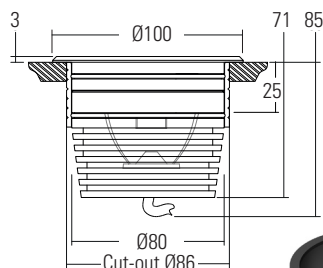


/485GT Ground tube

Designed for soil or gravel surfaces. It is supplied with the fixing sleeve bonded into the tube and can be cut down on site. The tube can be buried with the necessary wiring via the PG9 IP67 gland and then the fitting installed after the landscaping work has been completed.

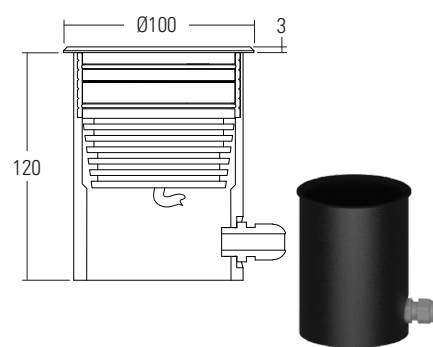

/485N Concrete Housing

The aluminium housing is used as a heat sink which keeps the LED fitting cool through the thermal transfer of the heat within the housing to the surrounding concrete. The housings are big enough for IP rated connections to be made inside and a second gland is available for cabling onto the next luminaire.

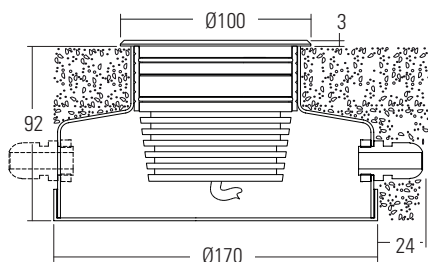

/485N

Concrete housing with 1x PG9 IP67 gland



/485N-2


Concrete housing with 2x PG9 IP67 gland



LD154DO (DRIVE OVER APPLICATION)


For drive over applications please specify the LD154DO, which is supplied with a drive over bezel and has an increased thickness of 3.5mm. The bezel features pins that secured into the concrete housing, preventing the luminaire from rotating when driven over. When specifying LD154DO, please use the dedicated configurator on page 9.

/485N-DO Drive over concrete housing with 1x PG9 IP67 gland.

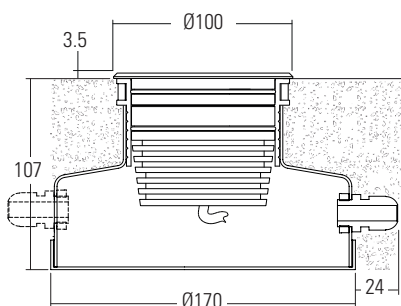

/485N-DO-2

Drive over concrete housing with 2x PG9 IP67 gland.

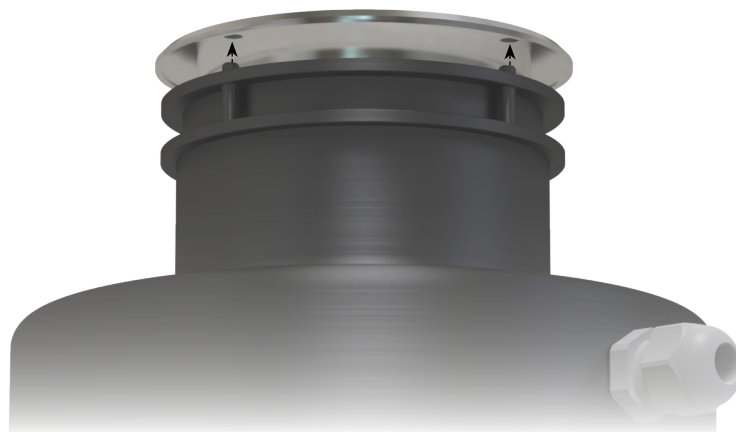

GLARE CONTROL OPTIONS

/NGS No glare shield

No glare shield. Low glare optic and matt black anodised optic holder aids in glare reduction.

/GSHM154 Half-moon glare shield




For applications that require low glare. Lumen output is typically reduced by 60% with no light lost on the lit surface.

/GSOB154 Oval beam glare shield

Reduces the angles at which glare is visible without compromising the oval output of the beam. Useful when used in applications where glare can be seen from two sides, for example archways.

/HL Honeycomb louvre


Helps reduce glare from all angles and can be used with glare shields.

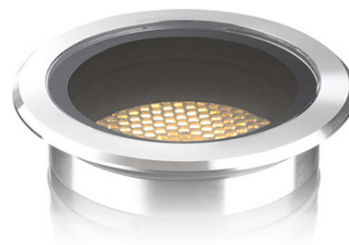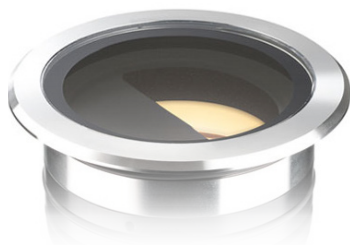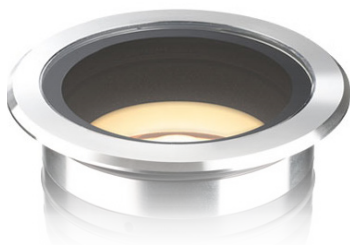

CONE DIAGRAMS

E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 700mA, 10W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD154 product page on the website.

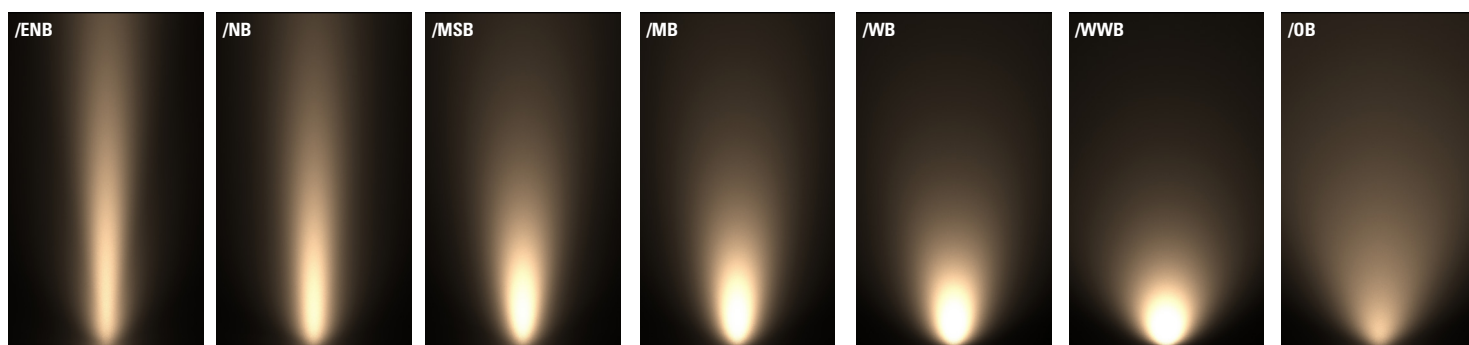

Extra Narrow Beam
700mA using a 9° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	0.48	1762
2.5	0.40	2537
2.0	0.32	3964
1.5	0.24	7048
1.0	0.16	15858
0.5	0.08	63430

Narrow Beam
700mA using a 11° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	0.58	1052
2.5	0.48	1515
2.0	0.39	2367
1.5	0.29	4208
1.0	0.19	9468
0.5	0.10	37970

Medium Spot Beam
700mA using a 22° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	1.18	367
2.5	0.98	529
2.0	0.78	826
1.5	0.59	1468
1.0	0.39	3304
0.5	0.20	13214

Medium Beam
700mA using a 29° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	1.55	233
2.5	1.29	335
2.0	1.03	523
1.5	0.78	930
1.0	0.52	2093
0.5	0.26	8370

Wide Beam
700mA using a 42° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	2.28	122
2.5	1.90	176
2.0	1.52	275
1.5	1.14	490
1.0	0.76	1101
0.5	0.38	4406

Extra Wide Beam
700mA using a 53° optic


Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	3.07	78
2.5	2.56	112
2.0	2.05	175
1.5	1.54	311
1.0	1.02	699
0.5	0.51	2797

Oval Beam
700mA using a 10° x 56° optic

Distance (m)	Cone Width (m)	Illuminance (lx)
3.0	0.50 / 3.22	332
2.5	0.42 / 2.68	477
2.0	0.34 / 2.14	746
1.5	0.25 / 1.61	1326
1.0	0.17 / 1.07	2984
0.5	0.08 / 0.54	11936


N1 LED Engine

Cone diagrams below are based on a 3000K N1 LED engine run at maximum output 700mA, 14W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD154 product page on the website.

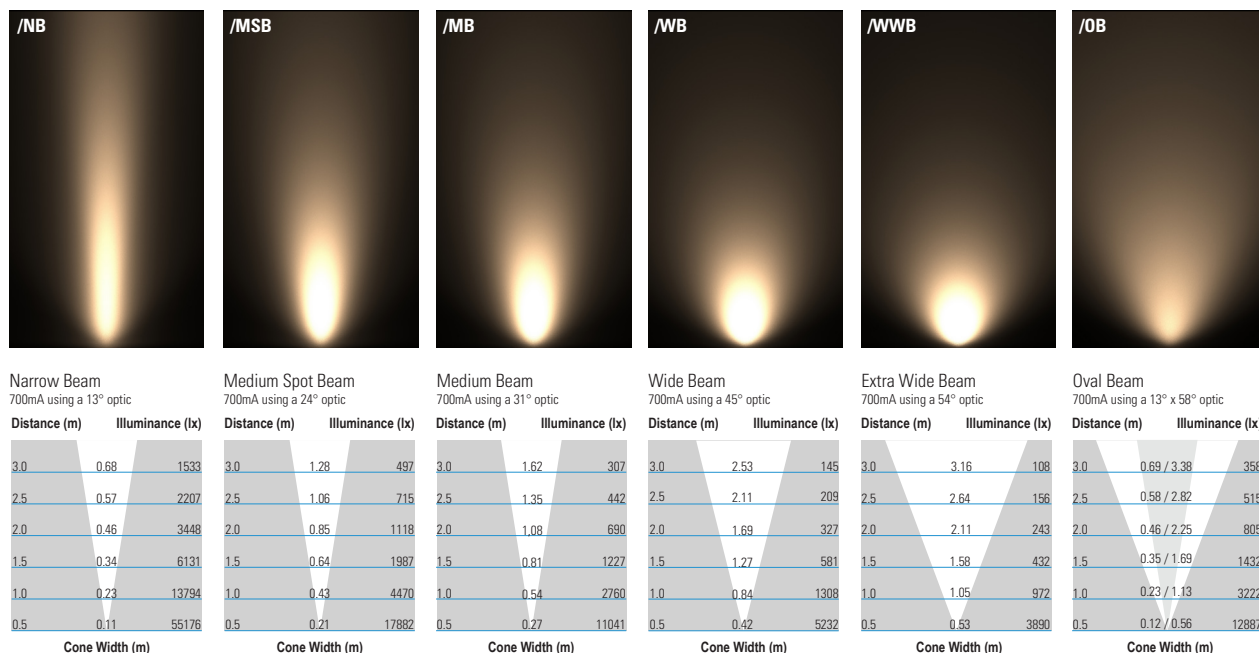

P1 LED Engine

Cone diagrams below are based on a 3000K P1 LED engine run at maximum output 500mA, 20W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD154 product page on the website.

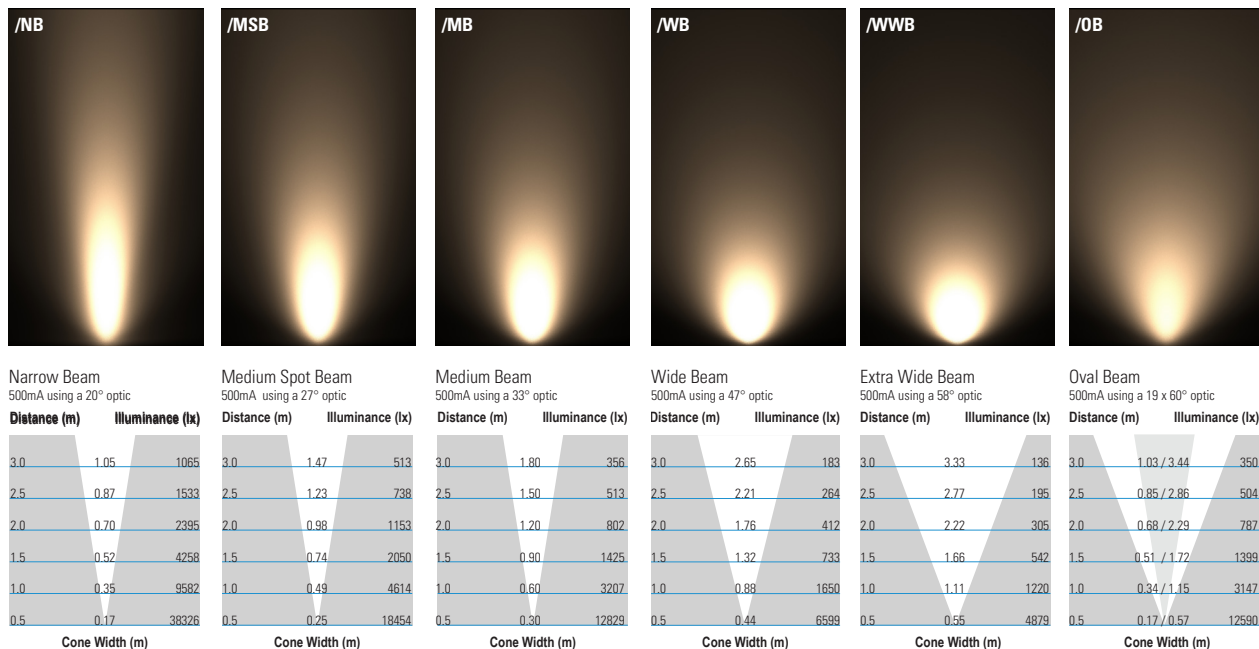


INSTALLATION GUIDE

Below is an uplighting application guide with suggested luminaire mounting positions for an even wall wash. Every project and lighting scenario will be different and the table below is to be used as a starting point. Please use our photometric files to further test the desired effect for your application. Files are available on the LD154 product page on our website.

LD154-E3		/ENB*	/NB*	/MSB	/MB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	0.25M	0.3M	0.35M	0.4M	0.5M	0.6M	0.3M
B	Spacing for an even wash	0.4M	0.45M	0.5M	0.7M	0.8M	0.9M	1.1M
C	500mA lit distance**	10M	7M	6.5M	5.5M	4.5M	4M	6M
C	700mA lit distance**	11M	8M	7M	6M	5M	4.5M	7M

LD154-N1		/NB*	/MSB	/MB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	0.3M	0.35M	0.4M	0.5M	0.6M	0.3M
B	Spacing for an even wash	0.45M	0.5M	0.7M	0.8M	0.9M	1.1M
C	500mA lit distance**	10M	8M	6.5M	5.5M	5M	7M
C	700mA lit distance**	11.5M	9M	7.5M	6.5M	6M	7.5M

LD154-P1		/NB*	/MSB	/MB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	0.35M	0.4M	0.45M	0.5M	0.6M	0.4M
B	Spacing for an even wash	0.5M	0.7M	0.75M	0.8M	0.9M	1.1M
C	350mA lit distance**	11M	9M	9M	7.5M	6M	8M
C	500mA lit distance**	14M	11M	10.5M	9M	8M	9M

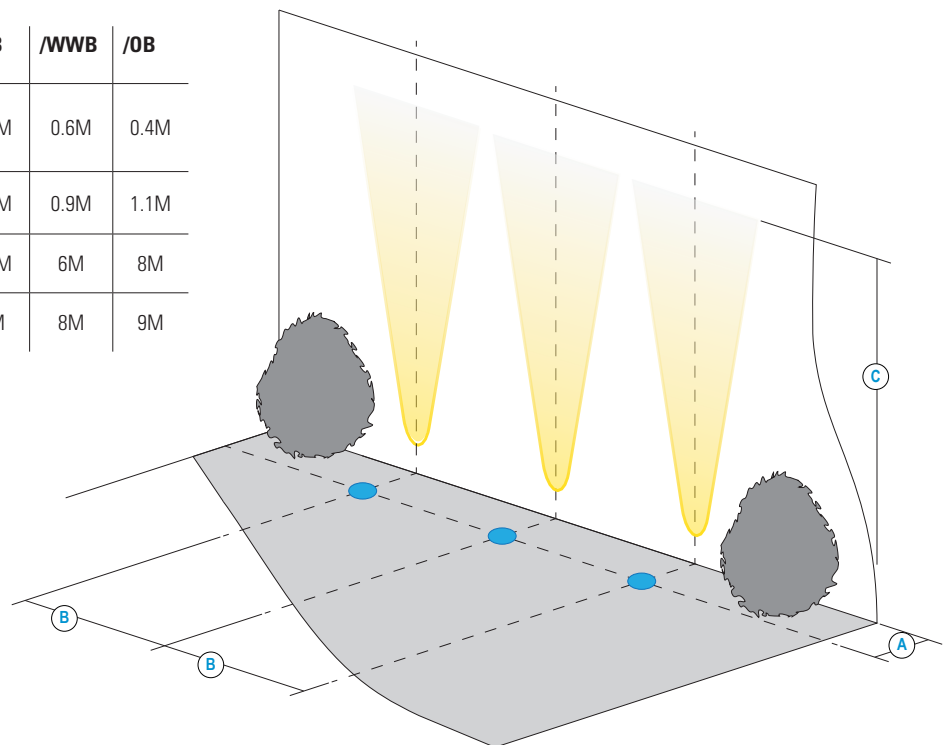

*Wall washing using narrow beam optics should only be used if the designer requires long distance lighting up the lit surface.

**Illuminated distance is calculated based on achieving 10% of the initial lux calculated at the start of the beam.

ORDER CODES & OPTIONS - LD154

Example: LD154-E3-700/LW30/OB/GSOB154/316 Stainless Steel/SC

Light engine & drive current	LED Colour	Beam Angle	Accessory	Finish	Fixing
LD154-	/	/	/	/	/

Ambient temperature key: 55°C

E3

5W LED at 350mA	LD154-E3-350	Super Warm White (2200K)	/LW22
7W LED at 500mA	LD154-E3-500	Extra Warm White (2700K)	/LW27
10W LED at 700mA	LD154-E3-700	Warm White (3000K)	/LW30
		White (4000K) on request	/LW40
		Cool White (5000K)	/LW50

E3-90

5W LED at 350mA	LD154-E3-90-350	Extra Warm White (2700K)	/LW27
7W LED at 500mA	LD154-E3-90-500	Warm White (3000K)	/LW30
10W LED at 700mA	LD154-E3-90-700		

N1

7W LED at 350mA	LD154-N1-350	Super Warm White (2200K)	/LW22
10W LED at 500mA*	LD154-N1-500	Extra Warm White (2700K)	/LW27
14W LED at 700mA	LD154-N1-700	Warm White (3000K)	/LW30
		White (4000K) on request	/LW40
		Cool White (5000K)	/LW50

*55°C ambient when placed in a 485N / 485N-2 concrete can in concrete.

P1

14W LED at 350mA	LD154-P1-350	Super Warm White (2200K)	/LW22
20W LED at 500mA	LD154-P1-500	Extra Warm White (2700K)	/LW27
		Warm White (3000K)	/LW30
		White (4000K) on request	/LW40
		Cool White (5000K)	/LW50

Drivers
Use with 350mA, 500mA & 700mA constant current LED drivers
We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.

9° Extra Narrow	/ENB
11° Narrow	/NB
22° Medium Spot	/MSB
29° Medium	/MB
42° Wide	/WB
53° Extra Wide	/WWB
10° x 56° Oval	/OB








	/NGS
	/GSHM154
	/GSOB154
	/HL

	316 Stainless Steel
	Polished & Passivated 316 Stainless Steel (for marine environments)
	Paint Finish White (RAL 9016)
	Paint Finish Black (RAL 9005)
	Paint Finish Classic Bronze (YM262E)
	Paint Finish Textured Mars Bronze
	Paint Finish Textured Fir Green (RAL 6009)
	Paint Finish Gunmetal Grey (RAL 7021)
	Paint Finish - RAL

	/SC
	/485S
	/485N
	/485N-2

ORDER CODES & OPTIONS - LD154DO

Example: LD154DO-E3-700/LW30/OB/GSOB154/316 Stainless Steel/485N-DO

Light engine & drive current		LED Colour		Beam Angle		Accessory		Finish		Fixing	
LD154D0-											
Ambient temperature key: ● 55°C											
<div><div></div>E3</div>											
5W LED at 350mA	LD154D0-E3-350	Super Warm White (2200K)	/LW22	9° Extra Narrow	/ENB						
7W LED at 500mA	LD154D0-E3-500	Extra Warm White (2700K)	/LW27	11° Narrow	/NB						
10W LED at 700mA	LD154D0-E3-700	Warm White (3000K)	/LW30	22° Medium Spot	/MSB						
		White (4000K) on request	/LW40	29° Medium	/MB						
		Cool White (5000K)	/LW50	42° Wide	/WB						
				53° Extra Wide	/WWB						
				10° x 56° Oval	/OB						
<div><div></div>E3-90</div>											
5W LED at 350mA	LD154D0-E3-90-350	Extra Warm White (2700K)	/LW27								
7W LED at 500mA	LD154D0-E3-90-500	Warm White (3000K)	/LW30								
10W LED at 700mA	LD154D0-E3-90-700										
<div><div></div>N1</div>											
7W LED at 350mA	LD154D0-N1-350	Super Warm White (2200K)	/LW22	13° Narrow	/NB						
10W LED at 500mA*	LD154D0-N1-500	Extra Warm White (2700K)	/LW27	24° Medium Spot	/MSB						
14W LED at 700mA	LD154D0-N1-700	Warm White (3000K)	/LW30	31° Medium	/MB						
		White (4000K) on request	/LW40	45° Wide	/WB						
		Cool White (5000K)	/LW50	54° Extra Wide	/WWB						
				13° x 58° Oval	/OB						
<div><div></div>P1</div>											
14W LED at 350mA	LD154D0-P1-350	Super Warm White (2200K)	/LW22	20° Narrow	/NB						
20W LED at 500mA	LD154D0-P1-500	Extra Warm White (2700K)	/LW27	27° Medium Spot	/MSB						
		Warm White (3000K)	/LW30	33° Medium	/MB						
		White (4000K) on request	/LW40	47° Wide	/WB						
		Cool White (5000K)	/LW50	58° Extra Wide	/WWB						
				19° x 60° Oval	/OB						

Drivers
Use with 350mA, 500mA & 700mA constant current LED drivers We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.