


## LD154/LD154DO

### HIGH-POWER RECESSED EXTERIOR LED UPLIGHT



The LD154 is our most powerful fitting to date, delivering up to 1443lm from a minimal body depth of 71mm. It forms a new range of high-power uplight solutions for drive over, low glare (LD154DR) and asymmetric installations (LD154T). There are 3 LED engine options available. Our new P1 engine delivers the highest output, whilst the E3 offers an exceptional extra narrow beam of 9° and the N1, a 13° beam. The lens assembly features large 50mm optics which offer ultra-high efficiency, superior beam quality and low glare. Reaching heights of up to 14 metres, the LD154 demonstrates excellent size to output ratio and has been designed with a repairable engine, providing a robust circular solution for high-power uplight applications.

## KEY FEATURES




- > New high-power P1 engine with CREE COB delivering upto 1443lm at 500mA in 3000K
- > E3 engine with NICHIA LED delivering up to 699lm at 700mA in 3000K, offering an exceptional 9° extra narrow beam with peak intensity reaching 15,922 cd
- > N1 engine with CREE COB delivering up to 1028lm at 700mA in 3000K offering a 13° narrow beam
- > Utilises large 50mm low glare optics, chosen for efficiency, quality of beam and ability to produce narrow beams at high outputs
- > Low glare product with a choice of accessories to minimise the view of the light source at various angles
- >  Contains our integral moisture guard (anti-wicking barrier), stopping water ingress from going up the cable into the product from incorrect IP-rated connections
- > Chamfered bezel available in 316 Stainless Steel, Polished & Passivated Stainless Steel, a wide range of powder coat paint finishes or any RAL colour
- > LD154DO has been designed for drive over applications with a thickened bezel and dedicated concrete housing to prevent rotation of the fitting
- > For applications requiring super low glare or an asymmetric beam, please view the LD154DR and LD154T data sheets
- > Switched, 0-10V, Casambi, DMX, DALI, or Mains dimmable drivers available

## DIMENSIONS

For full dimensions please go to page 4.



## WHITE LED ENGINE SPECIFICATION

| Engine                                | E3  |            |             | N1                                 |             |             | P1                                 |             |
|---------------------------------------|---|------------|-------------|------------------------------------|-------------|-------------|------------------------------------|-------------|
| Beam angles                           | 9°, 11°, 22°, 29°, 42°, 53°, 10° x 56°  |            |             | 13°, 24°, 31°, 45°, 54°, 13° x 58° |             |             | 20°, 27°, 33°, 47°, 58°, 19° x 60° |             |
| LED manufacturer                      | NICHIA  |            |             | CREE                               |             |             | CREE                               |             |
| Colour temperature                    | 2200K, 2700K, 3000K, 4000K, 5000K   |            |             | 2200K, 2700K, 3000K, 4000K, 5000K  |             |             | 2200K, 2700K, 3000K, 4000K, 5000K  |             |
| Current [Rated Output]                | 350mA [5W]  | 500mA [7W] | 700mA [10W] | 350mA [7W]                         | 500mA [10W] | 700mA [14W] | 350mA [14W]                        | 500mA [20W] |
| Typical LED Circuit wattage           | 4.4W  | 6.4W       | 9.2W        | 6.4W                               | 9.3W        | 13.3W       | 13.3W                              | 19.6W       |
| Delivered lumens (L <sub>100</sub> )* | 418   | 557        | 699         | 577                                | 776         | 1028        | 1050                               | 1443        |
| Delivered lm/Circuit W**              | 94  | 87         | 76          | 90                                 | 83          | 77          | 79                                 | 74          |
| Typical LED Source wattage            | 4W  | 5.8W       | 8.3W        | 5.8W                               | 8.4W        | 12.0W       | 12.0W                              | 17.6W       |
| Source LED lm                         | 574   | 740        | 949         | 694                                | 937         | 1264        | 1449                               | 1983        |
| Source lm/W                           | 144   | 128        | 114         | 120                                | 112         | 105         | 121                                | 113         |
| Forward voltage (V <sub>100</sub> )   | 11.3V   | 11.6V      | 11.8V       | 16.6V                              | 16.8V       | 17.1V       | 34.3V                              | 35.2V       |
| CRI                                   | 85  |            | 90***       | 93                                 |             |             | 90                                 |             |
| Colour consistency                    | 2 SDCM  |            |             | 2 SDCM                             |             |             | 3 SDCM                             |             |
| Peak intensity                        | 15,922 cd   |            |             | 13,809 cd                          |             |             | 10,624 cd                          |             |
| LOR                                   | 0.74  |            |             | 0.81                               |             |             | 0.73                               |             |
| TM30                                  | RF86   RG98   |            |             | RF91   RF99                        |             |             | RF90   RG97                        |             |
| UGR rating ('downlight' mounted)      | 6.4   | 7.4        | 8.2         | 5.8                                | 6.8         | 7.8         | 8.6                                | 9.7         |
| BUG rating ('uplight' mounted)        | B0-U3-G0  |            | B0-U4-G0    | B0-U4-G0                           |             | B0-U5-G0    | B0-U5-G0                           |             |
| LED lifetime                          | L90B5 at 90,000hrs  |            |             |                                    |             |             |                                    |             |
| Applications                          |    |            |             |                                    |             |             |                                    |             |

These values are based on LD154-E3-700/830/ENB, LD154-N1-700/930/NB and LD154-P1-700/930/NB

\*See lumen variance table to the right for N1 engine. E3 lumens apply across all colour temperatures

\*\*LED wattage includes losses associated with using a 90% efficient driver

\*\*\*90 CRI available in 2700K/3000K only. Approx. 10% lumen drop will occur compared to 85 CRI variants

| Lumen variance by CCT |        |
|-----------------------|--------|
| 2200K                 | -7%    |
| 2700K                 | +/- 0% |
| 4000K                 | +7%    |
| 5000K                 | +16%   |

## MECHANICAL

|                             |  |             | 350mA         | 500mA         | 700mA         |
|-----------------------------|--|-------------|---------------|---------------|---------------|
| Ambient temperature<br>55°C | E3   | Soil/Sleeve | -20°C to 55°C | -20°C to 55°C | -20°C to 40°C |
|                             |  | Concrete    | -20°C to 55°C | -20°C to 55°C | -20°C to 50°C |
|                             | N1   | Soil/Sleeve | -20°C to 55°C | -20°C to 50°C | -20°C to 25°C |
|                             |  | Concrete    | -20°C to 55°C | -20°C to 55°C | -20°C to 50°C |
|                             | P1   | Soil/Sleeve | -20°C to 25°C | N/A           | -             |
|                             |  | Concrete    | -20°C to 45°C | -20°C to 25°C | -             |
| Glass                       | 8mm thick, low iron glass  |             |               |               |               |
| Materials                   | Black hard anodised aluminium body, 316 Stainless Steel bezel                        |             |               |               |               |
| Weight of product           | 0.68kg   |             |               |               |               |
| IP rating                   | IP67   |             |               |               |               |
| IK rating                   | IK08   |             |               |               |               |
| Wiring                      | In-series constant current wiring (pre-wired with 2 core cable at a length of 250mm) |             |               |               |               |

## ENVIRONMENTAL

|                    |  |  |
|--------------------|--|--|
| TM65               | Available on request   |  |
| TM66               | 2.5  |  |
| Repair + Refurbish |  <p>This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.</p> |  |

## AVAILABLE FINISHES

*Please refer to our finishes guide for full details*



### 316 STAINLESS STEEL

- > Marine grade 316 Stainless Steel
- > Standard machined finish
- > Extremely durable
- > Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation
- > Interior & exterior use



### POLISHED & PASSIVATED 316 STAINLESS STEEL

- > Marine Grade 316 Stainless Steel
- > Pristine mirror like finish
- > Recommended for pools and marine applications
- > Extremely durable with very high corrosion resistance
- > Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments
- > Interior & exterior use

### PAINT FINISH - POWDER COAT

- > The powder-coated finish has a very matte appearance.
- > Not recommended for high traffic in-ground applications, unless placed to one side where the bezel will not be walked on
- > Powder coat paint is generally used on stainless steel or anodised aluminium components



**WHITE**  
(RAL 9016)



**BLACK**  
(RAL 9005)



**CLASSIC BRONZE**  
(YM262E)



**TEXTURED MARS BRONZE**



**TEXTURED FIR GREEN**  
(RAL 6009)



**GUNMETAL GREY**  
(RAL 7021)



**RAL COLOURS**




## DIMENSIONS AND FIXING OPTIONS

Dimensions in mm


### /SC Spring clips

Suitable for use in surfaces with a thickness of 1mm – 25mm. Spring clips provide a simple, single fix mounting method. We recommend that spring clips are only used in interior applications.




### /485S Fixing sleeve and O-rings

Acetal sleeve is bonded into the mounting surface first and the fitting is held in with O-rings. We recommend this method for mounting in exterior in-ground applications.




### /485GT Ground tube

Designed for soil or gravel surfaces. It is supplied with the fixing sleeve bonded into the tube and can be cut down on site. The tube can be buried with the necessary wiring via the PG9 IP67 gland and then the fitting installed after the landscaping work has been completed.

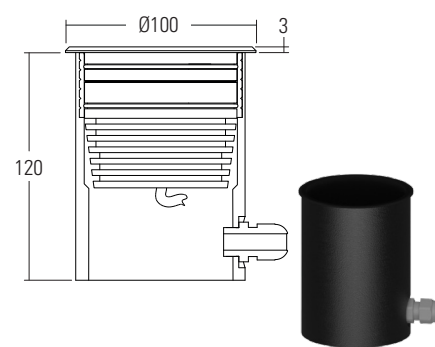

### /485N Concrete Housing

The aluminium housing is used as a heat sink which keeps the LED fitting cool through the thermal transfer of the heat within the housing to the surrounding concrete. The housings are big enough for IP rated connections to be made inside and a second gland is available for cabling onto the next luminaire.

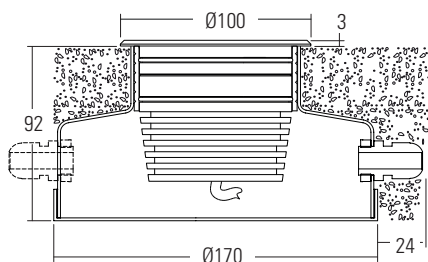

**/485N**  
Concrete housing with 1x PG9 IP67 gland




**/485N-2**  
Concrete housing with 2x PG9 IP67 gland

## LD154DO (DRIVE OVER APPLICATION)


For drive over applications please specify the LD154DO, which is supplied with a drive over bezel and has an increased thickness of 3.5mm. The bezel features pins that secured into the concrete housing, preventing the luminaire from rotating when driven over. When specifying LD154DO, please use the dedicated configurator on page 9.

### /485N-DO Drive over concrete housing with 1x PG9 IP67 gland.

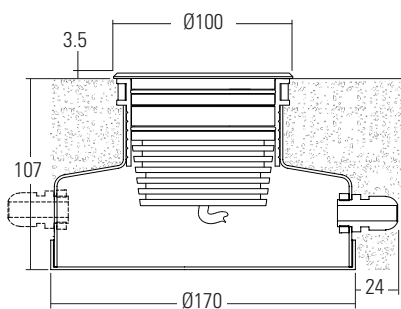

### /485N-DO-2

Drive over concrete housing with 2x PG9 IP67 gland.

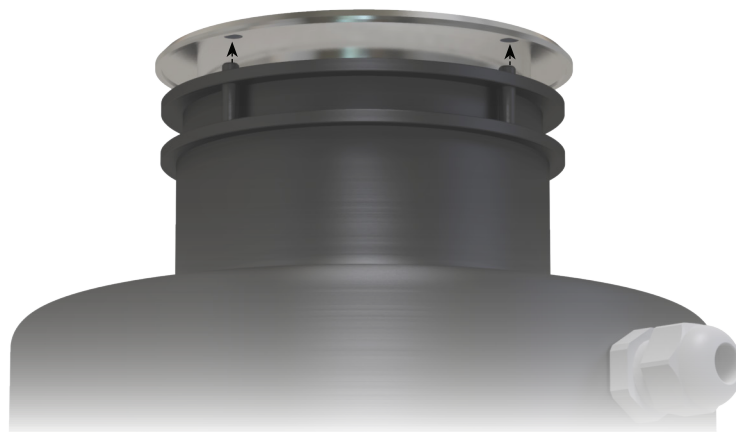

## GLARE CONTROL OPTIONS

### /NGS No glare shield

No glare shield. Low glare optic and matt black anodised optic holder aids in glare reduction.

### /GSHM154 Half-moon glare shield


For applications that require low glare. Lumen output is typically reduced by 60% with no light lost on the lit surface.

### /GSOB154 Oval beam glare shield

Reduces the angles at which glare is visible without compromising the oval output of the beam. Useful when used in applications where glare can be seen from two sides, for example archways.

### /HL Honeycomb louvre


Helps reduce glare from all angles and can be used with glare shields.



## CONE DIAGRAMS

### E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 700mA, 10W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD154 product page on the website.

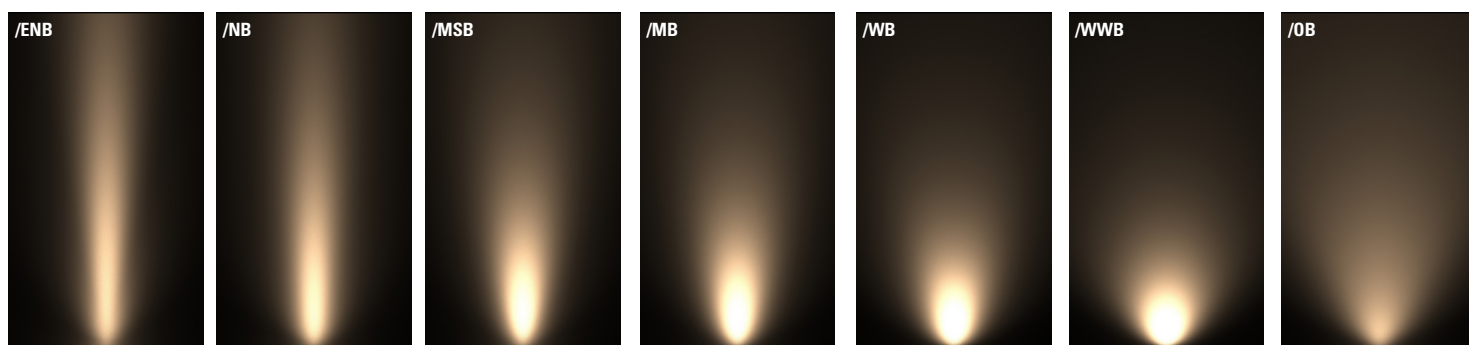

Extra Narrow Beam  
700mA using a 9° optic

| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 0.48           | 1762             |
| 2.5          | 0.40           | 2537             |
| 2.0          | 0.32           | 3964             |
| 1.5          | 0.24           | 7048             |
| 1.0          | 0.16           | 15858            |
| 0.5          | 0.08           | 63430            |

Narrow Beam  
700mA using a 11° optic

| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 0.58           | 1052             |
| 2.5          | 0.48           | 1515             |
| 2.0          | 0.39           | 2367             |
| 1.5          | 0.29           | 4208             |
| 1.0          | 0.19           | 9468             |
| 0.5          | 0.10           | 37970            |

Medium Spot Beam  
700mA using a 22° optic

| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 1.18           | 367              |
| 2.5          | 0.98           | 529              |
| 2.0          | 0.78           | 826              |
| 1.5          | 0.59           | 1468             |
| 1.0          | 0.39           | 3304             |
| 0.5          | 0.20           | 13214            |

Medium Beam  
700mA using a 29° optic

| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 1.55           | 233              |
| 2.5          | 1.29           | 335              |
| 2.0          | 1.03           | 523              |
| 1.5          | 0.78           | 930              |
| 1.0          | 0.52           | 2093             |
| 0.5          | 0.26           | 8370             |

Wide Beam  
700mA using a 42° optic

| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 2.28           | 122              |
| 2.5          | 1.90           | 176              |
| 2.0          | 1.52           | 275              |
| 1.5          | 1.14           | 490              |
| 1.0          | 0.76           | 1101             |
| 0.5          | 0.38           | 4406             |

Extra Wide Beam  
700mA using a 53° optic


| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 3.07           | 78               |
| 2.5          | 2.56           | 112              |
| 2.0          | 2.05           | 175              |
| 1.5          | 1.54           | 311              |
| 1.0          | 1.02           | 699              |
| 0.5          | 0.51           | 2797             |

Oval Beam  
700mA using a 10° x 56° optic

| Distance (m) | Cone Width (m) | Illuminance (lx) |
|--------------|----------------|------------------|
| 3.0          | 0.50 / 3.22    | 332              |
| 2.5          | 0.42 / 2.68    | 477              |
| 2.0          | 0.34 / 2.14    | 746              |
| 1.5          | 0.25 / 1.61    | 1326             |
| 1.0          | 0.17 / 1.07    | 2984             |
| 0.5          | 0.08 / 0.54    | 11936            |


## N1 LED Engine

Cone diagrams below are based on a 3000K N1 LED engine run at maximum output 700mA, 14W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD154 product page on the website.

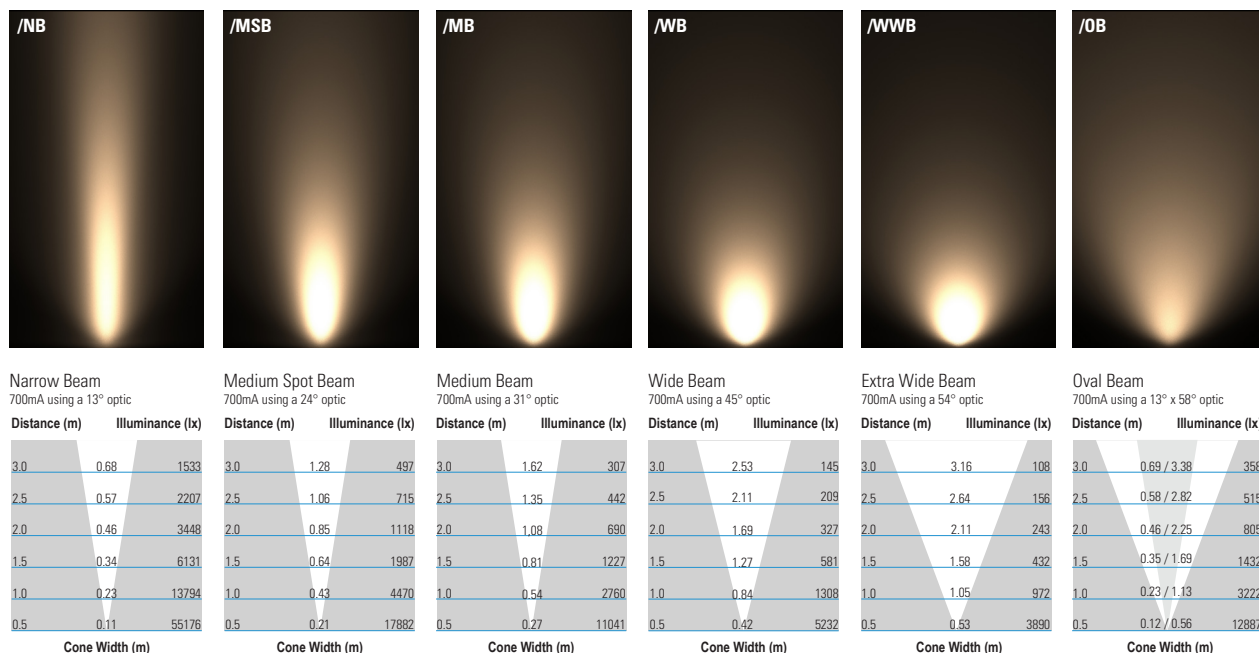

## P1 LED Engine

Cone diagrams below are based on a 3000K P1 LED engine run at maximum output 500mA, 20W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD154 product page on the website.

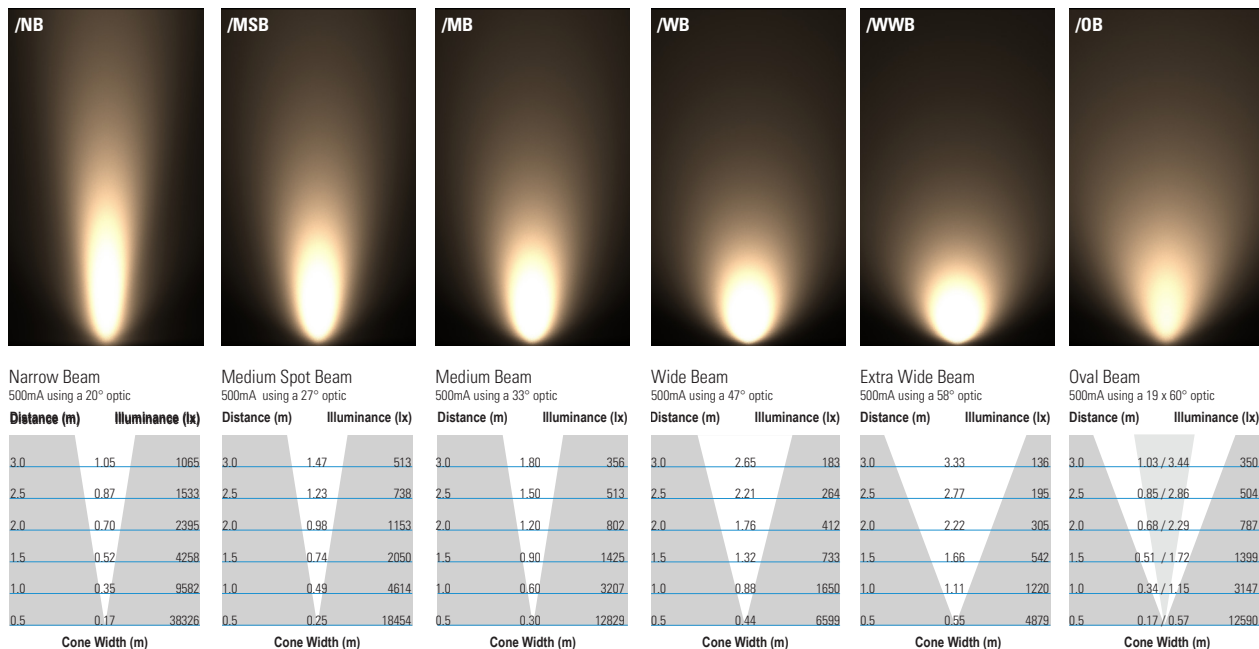


## INSTALLATION GUIDE

Below is an uplighting application guide with suggested luminaire mounting positions for an even wall wash. Every project and lighting scenario will be different and the table below is to be used as a starting point. Please use our photometric files to further test the desired effect for your application. Files are available on the LD154 product page on our website.

| LD154-E3 |  | /ENB* | /NB*  | /MSB  | /MB  | /WB  | /WWB | /OB  |
|----------|--|-------|-------|-------|------|------|------|------|
| <b>A</b> | Distance from the centre of the fitting to the lit surface | 0.25M | 0.3M  | 0.35M | 0.4M | 0.5M | 0.6M | 0.3M |
| <b>B</b> | Spacing for an even wash                                   | 0.4M  | 0.45M | 0.5M  | 0.7M | 0.8M | 0.9M | 1.1M |
| <b>C</b> | 500mA lit distance**                                       | 10M   | 7M    | 6.5M  | 5.5M | 4.5M | 4M   | 6M   |
| <b>C</b> | 700mA lit distance**                                       | 11M   | 8M    | 7M    | 6M   | 5M   | 4.5M | 7M   |

| LD154-N1 |  | /NB*  | /MSB  | /MB  | /WB  | /WWB | /OB  |
|----------|--|-------|-------|------|------|------|------|
| <b>A</b> | Distance from the centre of the fitting to the lit surface | 0.3M  | 0.35M | 0.4M | 0.5M | 0.6M | 0.3M |
| <b>B</b> | Spacing for an even wash                                   | 0.45M | 0.5M  | 0.7M | 0.8M | 0.9M | 1.1M |
| <b>C</b> | 500mA lit distance**                                       | 10M   | 8M    | 6.5M | 5.5M | 5M   | 7M   |
| <b>C</b> | 700mA lit distance**                                       | 11.5M | 9M    | 7.5M | 6.5M | 6M   | 7.5M |

| LD154-P1 |  | /NB*  | /MSB | /MB   | /WB  | /WWB | /OB  |
|----------|--|-------|------|-------|------|------|------|
| <b>A</b> | Distance from the centre of the fitting to the lit surface | 0.35M | 0.4M | 0.45M | 0.5M | 0.6M | 0.4M |
| <b>B</b> | Spacing for an even wash                                   | 0.5M  | 0.7M | 0.75M | 0.8M | 0.9M | 1.1M |
| <b>C</b> | 350mA lit distance**                                       | 11M   | 9M   | 9M    | 7.5M | 6M   | 8M   |
| <b>C</b> | 500mA lit distance**                                       | 14M   | 11M  | 10.5M | 9M   | 8M   | 9M   |

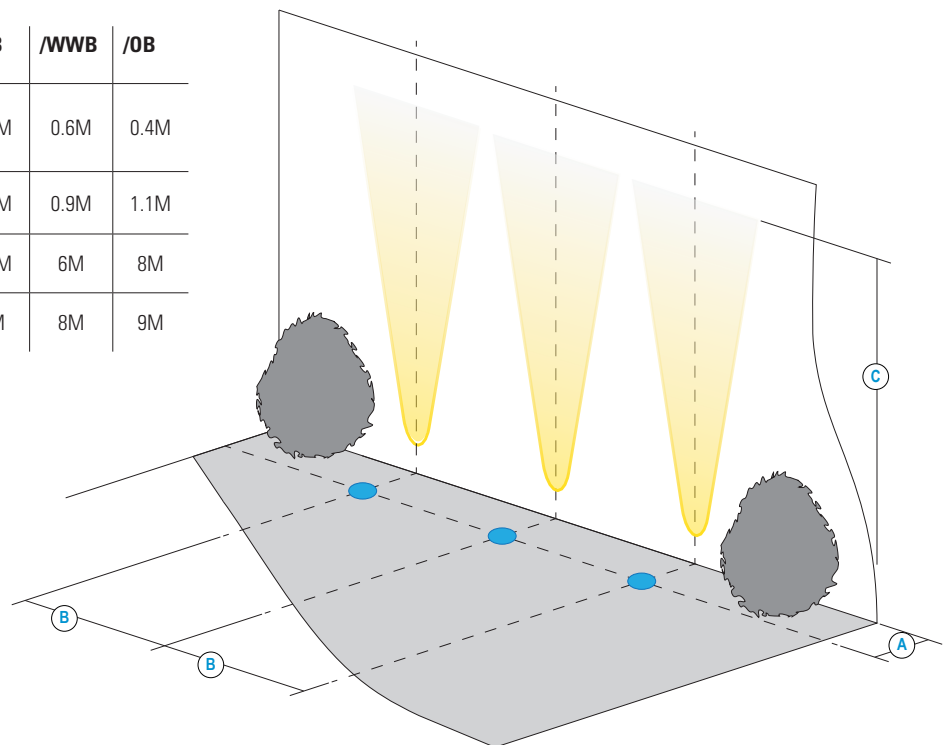

\*Wall washing using narrow beam optics should only be used if the designer requires long distance lighting up the lit surface.

\*\*Illuminated distance is calculated based on achieving 10% of the initial lux calculated at the start of the beam.

## ORDER CODES & OPTIONS - LD154

Example: LD154-E3-700/830/OB/GSOB154/316 Stainless Steel/SC

| Light engine & drive current | LED Colour | Beam Angle | Accessory | Finish | Fixing |
|------------------------------|------------|------------|-----------|--------|--------|
| LD154-                       | /          | /          | /         | /      | /      |

Ambient temperature key: ● 55°C

### ⊕ E3

|  |              |
|--|--------------|
| <span style="color: red;">●</span> 55°C<br>5W LED<br>at 350mA  | LD154-E3-350 |
| <span style="color: red;">●</span> 55°C<br>7W LED<br>at 500mA* | LD154-E3-500 |
| 10W LED<br>at 700mA**  | LD154-E3-700 |

\*55°C ambient when placed  
in a 485N / 485N-2 concrete can  
in concrete.

\*\*50°C ambient when placed  
in a 485N / 485N-2 concrete can  
in concrete.

|                             |      |
|-----------------------------|------|
| 2200K 85+ CRI               | /822 |
| 2700K 85+ CRI               | /827 |
| 3000K 85+ CRI               | /830 |
| 4000K 85+ CRI<br>on request | /840 |
| 5000K 85+ CRI               | /850 |
| 2700K 90+ CRI               | /927 |
| 3000K 90+ CRI               | /930 |

|                    |      |
|--------------------|------|
| 9°<br>Extra Narrow | /ENB |
| 11°<br>Narrow      | /NB  |
| 22°<br>Medium Spot | /MSB |
| 29°<br>Medium      | /MB  |
| 42°<br>Wide        | /WB  |
| 53°<br>Extra Wide  | /WWB |
| 10° x 56°<br>Oval  | /OB  |



/NGS



/GSHM154




/GSOB154




/HL



316 Stainless Steel



Polished & Passivated  
316 Stainless Steel  
(for marine environments)



Paint Finish  
White  
(RAL 9016)



Paint Finish  
Black  
(RAL 9005)



Paint Finish  
Classic Bronze  
(YM262E)



Paint Finish  
Textured Mars Bronze




Paint Finish  
Textured Fir Green  
(RAL 6009)



Paint Finish  
Gunmetal Grey  
(RAL 7021)



Paint Finish  
RAL Colours



/SC



/485S



/485N



/485N-2

### ○ N1

|   |              |
|---|--------------|
| <span style="color: red;">●</span> 55°C<br>7W LED<br>at 350mA   | LD154-N1-350 |
| <span style="color: red;">●</span> 55°C<br>10W LED<br>at 500mA* | LD154-N1-500 |
| 14W LED<br>at 700mA**   | LD154-N1-700 |

\*55°C ambient when placed  
in a 485N / 485N-2 concrete can  
in concrete.

\*\*50°C ambient when placed  
in a 485N / 485N-2 concrete can  
in concrete.

|                             |      |
|-----------------------------|------|
| 2200K 93+ CRI               | /922 |
| 2700K 93+ CRI               | /927 |
| 3000K 93+ CRI               | /930 |
| 4000K 93+ CRI<br>on request | /940 |
| 5000K 93+ CRI               | /950 |

|                    |      |
|--------------------|------|
| 13°<br>Narrow      | /NB  |
| 24°<br>Medium Spot | /MSB |
| 31°<br>Medium      | /MB  |
| 45°<br>Wide        | /WB  |
| 54°<br>Extra Wide  | /WWB |
| 13° x 58°<br>Oval  | /OB  |

### ⦿ P1

|                     |              |
|---------------------|--------------|
| 14W LED<br>at 350mA | LD154-P1-350 |
| 20W LED<br>at 500mA | LD154-P1-500 |

|                             |      |
|-----------------------------|------|
| 2200K 90+ CRI               | /922 |
| 2700K 90+ CRI               | /927 |
| 3000K 90+ CRI               | /930 |
| 4000K 90+ CRI<br>on request | /940 |
| 5000K 90+ CRI               | /950 |

|                    |      |
|--------------------|------|
| 20°<br>Narrow      | /NB  |
| 27°<br>Medium Spot | /MSB |
| 33°<br>Medium      | /MB  |
| 47°<br>Wide        | /WB  |
| 58°<br>Extra Wide  | /WWB |
| 19° x 60°<br>Oval  | /OB  |

| Drivers   |
|---|
| Use with 350mA, 500mA & 700mA constant current LED drivers<br>We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website. |



## ORDER CODES & OPTIONS - LD154DO

Example: LD154DO-E3-700/930/OB/GSOB154/316 Stainless Steel/485N-DO

| Light engine & drive current | LED Colour | Beam Angle | Accessory | Finish | Fixing |
|------------------------------|------------|------------|-----------|--------|--------|
| LD154DO-                     | /          | /          | /         | /      | /      |

Ambient temperature key: ● 55°C

### E3

|  |                |
|--|----------------|
| <span style="color: red;">●</span> 55°C<br>5W LED<br>at 350mA  | LD154DO-E3-350 |
| <span style="color: red;">●</span> 55°C<br>7W LED<br>at 500mA* | LD154DO-E3-500 |
| 10W LED<br>at 700mA**  | LD154DO-E3-700 |

\*55°C ambient when placed in a 485N / 485N-2 concrete can in concrete.

\*\*50°C ambient when placed in a 485N / 485N-2 concrete can in concrete.

|                             |      |                    |      |
|-----------------------------|------|--------------------|------|
| 2200K 85+ CRI               | /822 | 9°<br>Extra Narrow | /ENB |
| 2700K 85+ CRI               | /827 | 11°<br>Narrow      | /NB  |
| 3000K 85+ CRI               | /830 | 22°<br>Medium Spot | /MSB |
| 4000K 85+ CRI<br>on request | /840 | 29°<br>Medium      | /MB  |
| 5000K 85+ CRI               | /850 | 42°<br>Wide        | /WB  |
| 2700K 90+ CRI               | /927 | 53°<br>Extra Wide  | /WWB |
| 3000K 90+ CRI               | /930 | 10° x 56°<br>Oval  | /OB  |



/NGS



316 Stainless Steel



/485N-DO



/GSHM154



/485N-DO-2



/GSOB154



/HL

### N1

|   |                |
|---|----------------|
| <span style="color: red;">●</span> 55°C<br>7W LED<br>at 350mA   | LD154DO-N1-350 |
| <span style="color: red;">●</span> 55°C<br>10W LED<br>at 500mA* | LD154DO-N1-500 |
| 14W LED<br>at 700mA**   | LD154DO-N1-700 |

\*55°C ambient when placed in a 485N / 485N-2 concrete can in concrete.

\*\*50°C ambient when placed in a 485N / 485N-2 concrete can in concrete.

|                             |      |                    |      |
|-----------------------------|------|--------------------|------|
| 2200K 93+ CRI               | /922 | 13°<br>Narrow      | /NB  |
| 2700K 93+ CRI               | /927 | 24°<br>Medium Spot | /MSB |
| 3000K 93+ CRI               | /930 | 31°<br>Medium      | /MB  |
| 4000K 93+ CRI<br>on request | /940 | 45°<br>Wide        | /WB  |
| 5000K 93+ CRI               | /950 | 54°<br>Extra Wide  | /WWB |
|                             |      | 13° x 58°<br>Oval  | /OB  |

### P1

|                     |                |
|---------------------|----------------|
| 14W LED<br>at 350mA | LD154DO-P1-350 |
| 20W LED<br>at 500mA | LD154DO-P1-500 |

|                             |      |                    |      |
|-----------------------------|------|--------------------|------|
| 2200K 90+ CRI               | /922 | 20°<br>Narrow      | /NB  |
| 2700K 90+ CRI               | /927 | 27°<br>Medium Spot | /MSB |
| 3000K 90+ CRI               | /930 | 33°<br>Medium      | /MB  |
| 4000K 90+ CRI<br>on request | /940 | 47°<br>Wide        | /WB  |
| 5000K 90+ CRI               | /950 | 58°<br>Extra Wide  | /WWB |
|                             |      | 19° x 60°<br>Oval  | /OB  |

#### Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers

We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.