


LD44

LOW GLARE MINIATURE RECESSED INTERIOR & EXTERIOR LED UPLIGHT/ WALL LIGHT



The LD44 has been designed for interior & exterior applications and can be specified as an uplight (LD44X) or wall light (LD44Y). Developed around our LD42 and LD43 range, it features a 2-core sheathed cable for exterior installations, delivering up to 180 lumens with a drive current option of 700mA. Optics are recessed 10mm for low glare and glare shield options allow aperture reductions of 45% or 70%. An optional 20° tilt film can be used to focus the light onto the lit surface for a more concentrated effect. With a replaceable light engine and anti-wicking barrier, the LD44 offers a robust, miniature solution for exterior rated uplighting and wall light applications in harsh environments.



KEY FEATURES

- > High-power C1 engine with NICHIA LED delivering up to 180lm at 700mA
- > For interior and exterior uplight (LD44X) or wall light (LD44Y) applications, with a 2-core sheathed cable for exterior installations
- > Minimal body depth and bezel diameter with optics recessed 10mm for low glare
- > Range of beam angles including 12°, 31°, 48°, 12° x 36°
- > Available with a 45% or 70% glare shield accessory
- > Optional 20° tilt film angles the light onto the lit surface for a more concentrated effect
- > Features an RLE (Replaceable Light Engine) engine with anti-wicking barrier to increase protection against moisture ingress
- > Wide range of high-quality machined metal, painted wet spray and powder coated bezel finishes available, including: 316 Stainless Steel, Polished & Passivated 316 Stainless Steel, Brass, Flamed Solid Bronze
- > Fixing options include spring clips or /480 first fix sleeve with O-rings
- > Switched, 0-10V, Casambi, DMX, DALI or Mains dimmable drivers available



DIMENSIONS

Dimensions in mm

For fixings and dimensions please go to page 3.



WHITE LED ENGINE SPECIFICATION

Engine	 C1		
Beam angles	12°, 31°, 48°, 12° x 36°		
LED manufacturer	NICHIA		
Colour temperature	2200K / 2700K / 3000K / 4000K / 5000K		
Current	350mA	500mA	700mA
LED power (Max)**	1.1W (1.2W**)	1.5W (1.7W**)	2.1W (2.4W**)
Delivered lumens (L ₁₀₀)*	103	134	180
Lumens per circuit watt	94	89	86
Forward voltage (V ₁₀₀)	3.4V		
CRI (Typ)	93		
Colour consistency	2 SCDM		
Peak intensity	1057 cd		
LED Lumens	206		
LOR	0.87		
TM30	RF93	RG100	
UGR***	18.3		
LED lifetime	L90B5 @ 90,000hrs		
Applications			

This data is based on LD44X-C1-700-LW30-NB

*Lumen output data applies to all colour temperatures

**Indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

*** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

Ambient temperature	-20° to 45° (350mA-500mA) or -20° to 35° (700mA)
Glass	3.3mm thick borosilicate glass with black ceramic screen print
Materials	Hard anodised aluminium body, machined 316 stainless steel bezel
IP rating	IP68
IK rating	IK06
Wiring	In-series constant current wiring (pre-wired with 2 x core cable at a length of 250mm)

ENVIRONMENTAL

TM65	Available on request
TM66	2.7

Please refer to our finishes guide for full details




**PAINT FINISH - POWDER COAT
(LD44X) & WET SPRAY (LD44Y)**

- | | | | | |
|---|---|---|--|--|
| > Marine grade 316 Steel | > Marine Grade 316 Steel | > Solid CZ121 Brass | > Solid Bronze | > The powder coated finish is very matt with a smooth texture unless stated otherwise |
| > Standard machined finish | > Mirror like finish | > Standard machined finish | > Hand finished Flamed Bronze unique to LightGraphix | |
| > Extremely durable | > Extremely durable | > Corrosion resistance rated fair to excellent | | |
| > Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation | > Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments | > Please note a natural green/brown patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location. | > Extremely durable with very high corrosion resistance | > Powder coat finishes: White (RAL 9016), Black (RAL 9005), Classic Bronze (YM262E), Gunmetal Grey (RAL 7021) Textured Mars Bronze (SX350F), Textured Fir Green (RAL 6009) or any RAL colour |
| > Interior & exterior use | > Interior & exterior use | > Interior & exterior use | > Please note a natural dark patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location. | > Powder coat is not recommended for high-traffic in-ground applications, unless placed to one side where it will not be walked on |
| | | | > Interior & exterior use | > The wet spray finish offers a fine coating with a slightly metallic finish |
| | | | | > Wet spray finishes: White (RAL 9016), Black (RAL 9005), Antique Bronze, Satin Antique Brass, Satin Brass, Anthracite Grey (7016) or any RAL colour |
| | | | | > Wet spray finishes are not recommended for in-ground applications |
| | | | | > Both paints are suitable for interior & exterior use |

Dimensions in mm

Robust, watertight method of fixing for in-ground exterior applications.

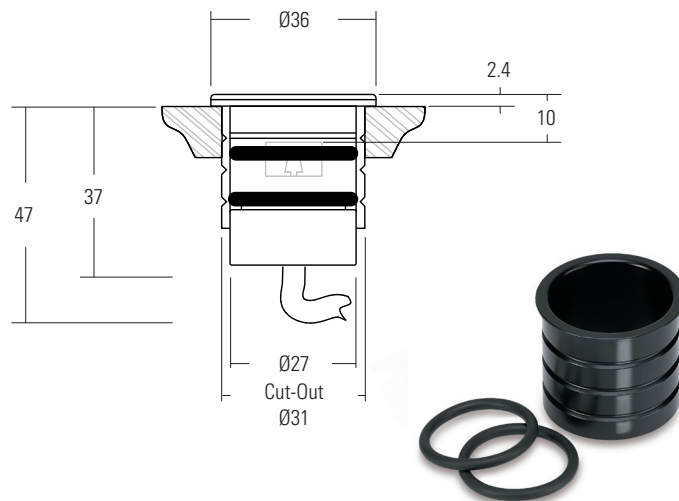

LD44 APPLICATION

In an effort to bring a modular approach to our new products, we now offer a further level of configuration to allow the same products for multiple applications. This includes bezel options and optical tilt lenses. These products will feature the suffix of LD44X for in-ground applications and LD44Y for wall/downlight applications referring to the axis of the mounting surface of the luminaire.

LD44X (Uplight)

The LD44X bezel is designed for in-ground applications. The glass is glued from the front to provide the bezel with a flush glass to help prevent the build-up of dirt and dust in the aperture.



LD44Y (Wall light)


The LD44Y bezel is designed for recessed wall applications. The glass is secured from behind with no glue line, allowing for a slightly smaller aperture and a more aesthetically pleasing luminaire. Pair the LD44Y bezel with our asymmetric tilt-lens for a great wall mounted floor washer.



GLARE CONTROL AND LIGHT OUTPUT OPTIONS


LD44

Circular aperture with lens and LED assembly recessed into the body by 10mm.

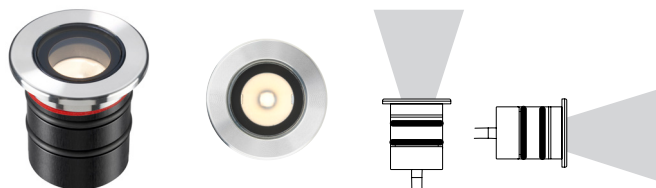


LD44 with GS44-45

Addition of a half-moon glare shield in front of the lens to further reduce glare.

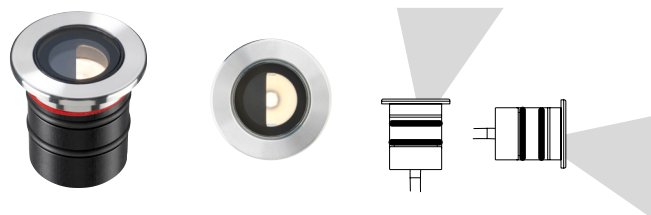


LD44 with tilt lens and GS44-45

Features the LD43W half-moon glare shield, but with the addition of an integral 20° tilt film which angles the light towards the lit surface.

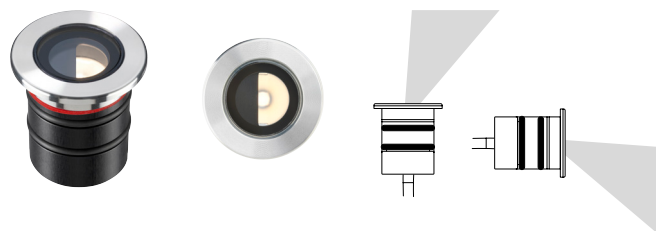


LD44 with GS44-70

Features a 70% glare shield for applications that require minimal output and glare. Please note that the oval beam cannot be used with the GS44-70.

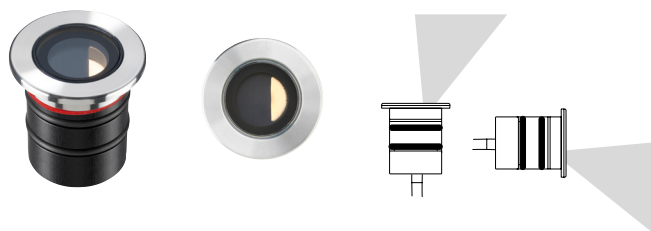

LD44 with tilt lens and GS44-70

Features the LD44 70% glare shield, but with the addition of an integral 20° tilt film which angles the light towards the lit surface. Please note this option is only available in a narrow beam.

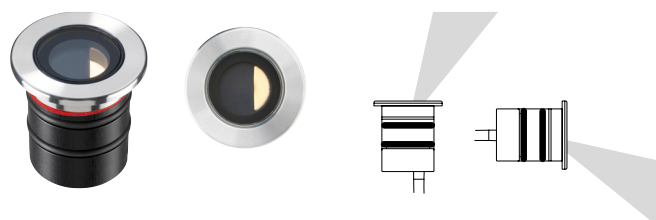

ORDER CODES & OPTIONS - LD44X

Example: LD44X - C1-700 / LW30 / OB / L / NGS / 316 STAINLESS STEEL / SC

Light engine & drive current	LED colour	Beam angle	Optical option	Glare shield	Finish	Fixing

C1	
LD44X (uplight)	
	
1.2W LED at 350mA	LD44X-C1-350
1.7W LED at 500mA	LD44X-C1-500
2.4W LED at 700mA	LD44X-C1-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

12° Narrow	/NB
31° Medium	/MB
48° Wide	/WB
12° x 36° Oval	/OB

20° tilt	A
No tilt	L


NGS

GS44-45

GS44-70


316 Stainless Steel

/480

Polished & Passivated 316 Stainless Steel (for marine environments)

Machined Brass

Flamed Solid Bronze

POWDER COAT White (RAL 9016)

POWDER COAT Black (RAL 9005)

POWDER COAT Classic Bronze (YM262E)

POWDER COAT Gunmetal Grey (RAL 7021)

POWDER COAT Textured Fir Green (RAL 6009)

POWDER COAT Textured Mars Bronze (SX350F)

POWDER COAT RAL


/480

/SC

Drivers
Use with 350mA, 500mA and 700mA constant current LED drivers We have a range of dimmable LED drivers including DMX and DALI compatible. Please see the downloads section on our website.

ORDER CODES & OPTIONS - LD44Y

Example: LD44Y - C1-700 / LW30 / OB / L / NGS / 316 STAINLESS STEEL / SC

Light engine & drive current	LED colour	Beam angle	Optical option	Glare shield	Finish	Fixing

C1	
LD44Y (wall light)	
	
1.2W LED at 350mA	LD44Y-C1-350
1.7W LED at 500mA	LD44Y-C1-500
2.4W LED at 700mA	LD44Y-C1-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

12° Narrow	/NB
31° Medium	/MB
48° Wide	/WB
12° x 36° Oval	/OB

20° tilt	A
No tilt	L


NGS

GS44-45

GS44-70


316 Stainless Steel

/480

Polished & Passivated 316 Stainless Steel (for marine environments)

Machined Brass

Flamed Solid Bronze

WET SPRAY Antique Bronze

WET SPRAY Satin Antique Brass

WET SPRAY Satin Brass

WET SPRAY Black (RAL 9005)

WET SPRAY Anthracite Grey (RAL 7016)

WET SPRAY White (RAL 9016)

WET SPRAY RAL


/480

/SC

Drivers

Use with 350mA, 500mA and 700mA constant current LED drivers

We have a range of dimmable LED drivers including DMX and DALI compatible. Please see the downloads section on our website.