

LD43DRG

MINIATURE DEEP RECESSED TRIMLESS EXTERIOR UPLIGHT WITH GLASS BEZEL



The LD43DRG is a miniature, ultra-deep recessed, LED in-ground uplight which can also be used as a downlight. The LED and optics are recessed at 33mm into the body for super low glare, which can be further reduced with an optional glare shield. Due to the miniature aperture of the LD43DRG, it is available in a narrow 12° beam only, offering defined edges, ideal for lighting doorways or narrow corridors. Featuring a high-quality, seamless glass top, the LD43DRG blends perfectly into its surroundings.



KEY FEATURES

- > High-power C1 engine with NICHIA LED delivering up to 137lm
- > Miniature fitting with LED and optics deep recessed 33mm for reduced glare
- > Available with a narrow 12° beam only due to the size of the aperture
- > Durable all glass bezel, suitable for a wide range of applications
- > Can be used as an uplight or downlight
- > Optional glare shield accessory for further reduced glare
- > Hidden fixing options include a rebate sleeve with O-ring, trimmed sleeve with O-ring, or plaster-in sleeve and O-ring. Also available with a ground tube
- > Integral anti-wicking barrier increases protection against moisture ingress due to incorrect IP rated cable connections
- > Switched, 0-10V, Casambi, DMX, DALI or Mains dimmable drivers available



DIMENSIONS

Dimensions in mm

For fixing dimensions please go to page 3.



WHITE LED ENGINE SPECIFICATION

Engine	 C1		
Beam angles	12°		
LED manufacturer	NICHIA		
Colour temperature	2200K / 2700K / 3000K / 4000K / 5000K		
Current	350mA	500mA	700mA
LED power (Max)**	1.2W	1.7W	2.4W
Delivered lumens (L ₁₀₀)*	63	82	137
Lumens per circuit watt	53	48	57
Forward voltage (V ₁₀₀)	3V	3.2V	3.4V
CRI (Typ)	93		
Colour consistency	2 SCDM		
Peak intensity	9788 cd		
LED Lumens	206		
LOR	0.67		
TM30	RF93	RG99	
UGR***	14.9		
LED lifetime	L90B5 at 90,000hrs		
Applications			

This data is based on LD43DR-C1-700-LW30-NB

*Lumen output data applies to all colour temperatures

**Indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

*** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

Ambient temperature	-20° to 45° (350mA-500mA) or -20° to 35° (700mA)
Glass	3mm thick borosilicate glass with ceramic screen print
Materials	Black anodised aluminium body with black anodised bezel and glass front
Weight of product	0.015kg
IP rating	IP66
Wiring	In-series constant current wiring (pre-wired with 2 core cable at a length of 250mm)

ENVIRONMENTAL


TM65	Available on request
TM66	2.7

DIMENSIONS AND FIXING ACCESSORIES

Dimensions in mm


/480SG Rebate trimless fixing sleeve and O-Ring

A robust and water tight method of fixing, for in ground applications. Mounting surface will require an 11mm rebate to allow for flush installation. Fixing ring available with a passivated stainless steel or powder coat black finish.*





/480TRG Minimalist Trimmed Sleeve and O-Ring

A robust and water tight method of fixing, with trimmed edge bezel for easy installation due to no rebate being required. Fixing ring available with a passivated stainless steel or powder coat black finish.*




/480PSG Plaster in Sleeve

For plaster in applications such as walls or ceilings.

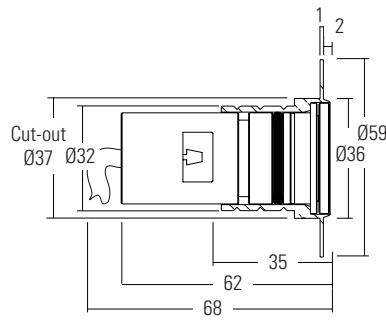

/480GTG Ground tube

The in-ground tube has been designed for applications where a recessed uplighter is required in soil or gravel terrain, and can also be used in concrete. The tube can be buried with the necessary wiring, and then the fitting installed after the landscaping work has been completed. It is supplied with the fixing sleeve bonded into the tube, and can be cut down on site. Fixing ring available with a passivated stainless steel or powder coat black finish.*

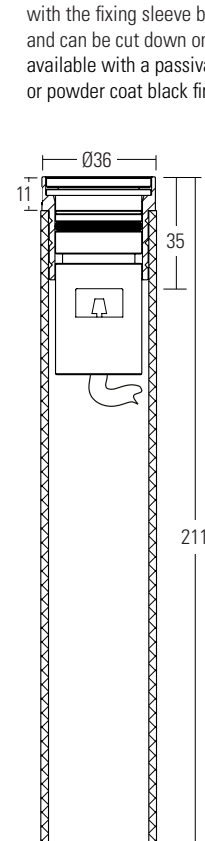

*NOTE: Powder coat black paint finish is not suitable for high-traffic areas.


/HT-44-G Trimless Family Hand tool

We supply our Trimless family fittings with a hand tool for easy installation and removal. Use the /HT-44-G suction cup or a similar suction tool for the removal of the fittings from their fixing options. Please contact your LightGraphix sales representative for more information.



How to use the hand tool

- 1 Set tool to a 90° angle.
- 2 Press tool firmly onto glass.
- 3 Tilt handle up to create suction, and pull directly upwards to remove fitting.
Note: Do not twist during removal as this could damage the bezel.

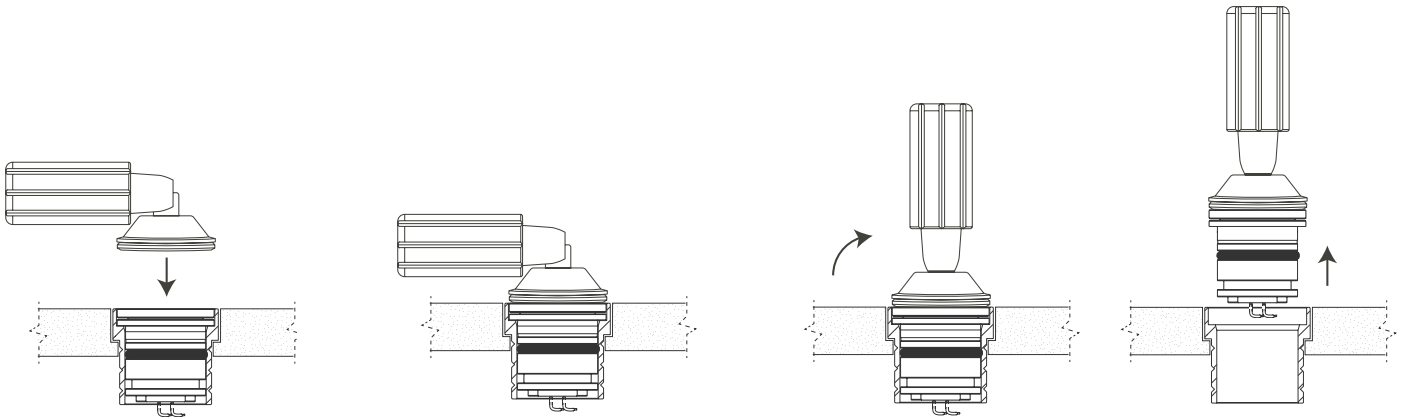

GLARE CONTROL OPTIONS

/GS45 Glare shield

An optional glare shield is available to further reduce glare from the LED and optic. This is useful in narrow details where people are going to walk directly over the fitting. This does not reduce the light on the lit surface (wall) but will cut out some light onto the ceiling.



ORDER CODES & OPTIONS

Example: LD43DRG-C1-500 / LW30 / NB / GSHM / 480SG / Paint finish black

Light Engine & Drive Current

LED Colour

Beam Angle




Glare shield

Fixing

Fixing Finish

*Not available on 480PSG

 **C1**

1.2W LED at 350mA	LD43DRG-C1-350	Super Warm White (2200K)	/LW22	12° Narrow	/NB			Passivated Stainless Steel Paint finish Black (Powder Coat)
1.7W LED at 500mA	LD43DRG-C1-500	Extra Warm White (2700K)	/LW27					
2.4W LED at 700mA	LD43DRG-C1-700	Warm White (3000K)	/LW30					
		White (4000K) - on request	/LW40					
		Cool White (5000K)	/LW50					

Drivers

Use with 350mA and 500mA constant current LED drivers

We have a range of dimmable LED drivers including DMX and DALI compatible. Please see the downloads section on our website.