

LD10236

HIGH-POWER DOUBLE OUTPUT SURFACE MOUNTED WALL WASHER



The LD10236 is a powerful double output surface mounted fitting, designed for interior and exterior wall washing applications. It can be specified with a wide range of options allowing it to suit most project requirements. Available LED engines include E3, CLR, Tunable White, RGBW and F1, which offer a range of colour temperatures between 2200K-5000K, with multiple beam angles and paint finishes to choose from. The fitting emits a beam at both the top and bottom and houses a matt black inner baffle with two recessed LEDs that are held in place by anti-glare rings for a low glare illumination. The LD10236 body is a machined billet of aluminium offering a robust and minimal design with a large selection of paint finishes available as well as discreet fixing options, that will allow it to blend into many environments. This is a very tough, high quality fitting, machined from high grade materials, ensuring excellent thermal and light output performance.

KEY FEATURES

- > E3 engine featuring NICHIA LEDs, delivering up to 986 lumens (x2 LEDs) in 3000K with 2-step binning and built in reverse polarity protection
- > Available with F1, RGBW and Tunable White LED engines and optional 2nd channel LEDs for secondary lighting applications
- > Features two LEDs pointing up and down, recessed in a matt black anodised body for reduced glare
- > Range of beam angles including a narrow 12° spot for lighting columns and arches, or a 15°x 49° spreader lens, which is ideal for wall washing applications
- > Single optic with matt black inner baffle produces a very consistent beam with no multiple shadows
- > Body is a machined solid billet of aluminium
- > Paint finishes include: White (RAL 9016), Silver, Anthracite Grey (RAL 7016), Black (RAL 9005), Antique Bronze, Satin Antique Brass, Satin Brass or any RAL finish
- > Discreet fixing with two grub screws behind the body
- > Available with Switched, 0-10V, Casambi, DMX, Dali or Mains dimmable driver

DIMENSIONS

Dimensions in mm

For fitting dimensions please go to page 4.



Design: Stan Baxter Lighting Design
Project: Private Residence
Product: LD10236

WHITE LED ENGINE SPECIFICATION

Engine	 E3 x 2	 F1 x 2
Beam angles	12°, 19°, 34°, 54°, 15°x 49°	25°, 46°, 65°, 18°x 45°.
LED manufacturer	NICHIA	CREE
Colour temperature*	2700K / 3000K / 4000K / 5000K	2200K, 2700K, 3000K, 4000K, 5000K
Current	350mA	350mA
LED power (Max)	8.4W (10W**)	6.4W (7W**)
Delivered lumens (L ₁₀₀)	758	490
Lumens per circuit watt	76	70
CRI (Typ)	85	90
Forward voltage (V ₁₀₀)	28V	18V
Colour consistency	2 SCDM	3 SCDM
Peak intensity	6104 cd	1641
LED lumens	1680	1246
LOR	0.78	0.59
TM30	RF85	RF90
UGR***	8.0	8.1
LED lifetime	L90B5 at 90,000hrs	
Applications		

These values are based around a LD10236-E3-700-LW30-NB & LD10236 -F1-700-LW22-MSB

*Lumen output data applies to all colour temperatures

**indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

***UGR values based on room parameters of 4H 8H, C70 W50 F20




MECHANICAL

Ambient temperature	-20° to 45° (350mA) or -20° to 35° (500mA)
Glass	Low iron glass 3mm thick
Materials	Anodised aluminium body, with stainless steel fixing brackets
Weight of product	1.26kg
IP rating	IP67
IK rating	IK08
Wiring	In-series constant current wiring (pre-wired with 2 core cable at a length of 1m)

COLOUR & DYNAMIC LED ENGINE SPECIFICATION

Engine	 CLR - Colour x 2	 RGBW x 2	 TW - Tunable White x 2
Beam angles	24°, 38°, 54°, 20° x 46°	38° colour mix lens	24°, 38°, 54°, 20° x 46°
LED manufacturer	CREE	CREE	CREE
Colour temperature	Red, Green, Blue, Amber	Red, Green, Blue, 4000K White	Warm White 2700K or 3000K Cool White 4000K or 5000K
Current	700mA	350mA 500mA	500mA
LED power (Max)	28W	10W 14W	12.6W (14W*) 7W per channel
Applications	     		

MECHANICAL

Glass	Low iron glass 3mm thick		
Materials	Anodised aluminium body, with stainless steel fixing brackets		
Weight of product	1.26kg		
IP rating	IP67		
IK rating	IK08		
Wiring	CLR - 2 core cables at 1m in length 	RGBW - 8 core cables at 1m in length 	TW - 4 core cables at 1m in length 

AVAILABLE FINISHES

Please refer to our finishes guide for full details

The LD10236 body is a machined single billet of aluminium and is painted in-house at LightGraphix. Paint finishes are suitable for interior and exterior use on surface mounted products. Our standard colours are below but we can accommodate any RAL request.



SILVER
ANODISED



ANTIQU
BRONZE



SATIN
ANTIQU BRASS



SATIN BRASS




BLACK (RAL 9005)



ANTHRACITE
GREY (RAL 7016)





WHITE
(RAL 9016)



RAL

DIMENSIONS

Dimensions in mm

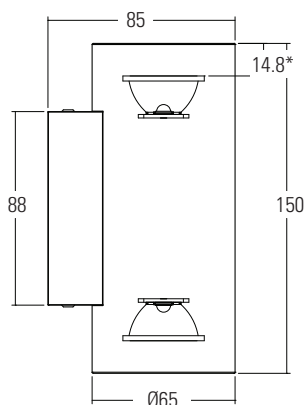


* 4.3mm when using the taller RGBW optic

CONE DIAGRAMS

E3 LED Engine


Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 500mA in one direction. Photometric files (LDT) are included in the design pack which can be downloaded from the LD10236 product page on the website.

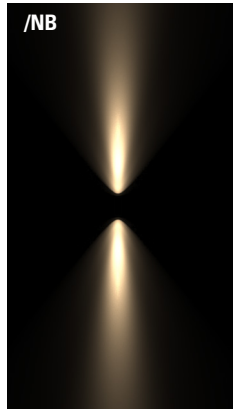

Narrow Beam

500mA using a 12° optic


Distance (m)	Luminance (lx)	
3.0	0.76	505
2.5	0.63	727
2.0	0.51	1136
1.5	0.38	2019
1.0	0.25	4542
0.5	0.13	18170
Cone Width (m)		

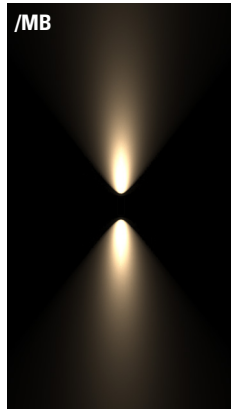

Medium Beam

500mA using a 19° optic


Distance (m)	Luminance (lx)	
3.0	1.05	291
2.5	0.87	419
2.0	0.70	654
1.5	0.52	1163
1.0	0.35	2616
0.5	0.17	10466
Cone Width (m)		

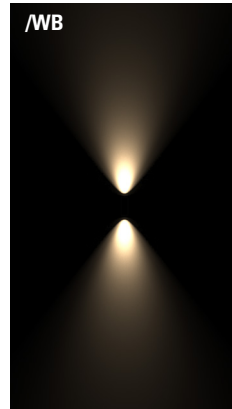

Wide Beam

500mA using a 34° optic


Distance (m)	Luminance (lx)	
3.0	1.77	121
2.5	1.47	174
2.0	1.18	271
1.5	0.88	483
1.0	0.59	1086
0.5	0.29	4344
Cone Width (m)		

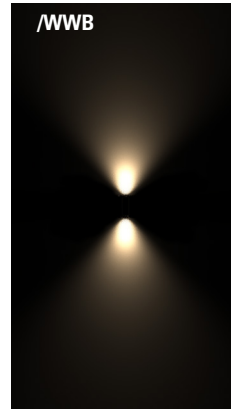

Extra Wide Beam

500mA using a 54° optic

Distance (m)	Luminance (lx)	
3.0	3.24	56
2.5	2.70	81
2.0	2.16	126
1.5	1.63	224
1.0	1.08	504
0.5	0.54	2014
Cone Width (m)		

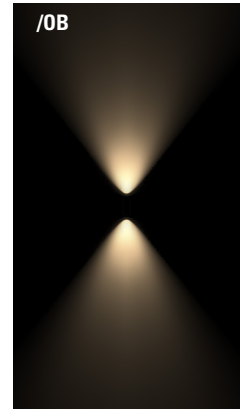


Oval Beam

500mA using a 15° X 49° optic

Distance (m)	Luminance (lx)	
3.0	2.46 / 0.75	199
2.5	2.05 / 0.62	287
2.0	1.64 / 0.50	448
1.5	1.23 / 0.37	796
1.0	0.82 / 0.25	1792
0.5	0.41 / 0.12	7167
Cone Width (m)		

F1 LED Engine


Cone diagrams below are based on a 2200K F1 LED engine run at maximum output 700mA in one direction. Photometric files (LDT) are included in the design pack which can be downloaded from the LD10236 product page on the website.

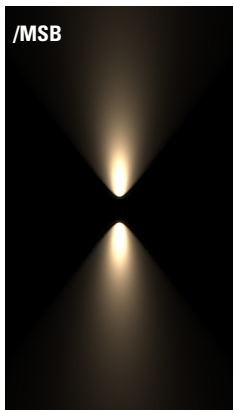

Medium Spot Beam

700mA using a 25° optic


Distance (m)	Luminance (lx)	
3.0	1.17	202
2.5	0.97	290
2.0	0.78	454
1.5	0.58	806
1.0	0.39	1814
0.5	0.19	7256
Cone Width (m)		

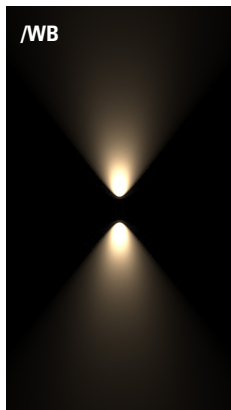

Wide Beam

700mA using a 46° optic


Distance (m)	Luminance (lx)	
3.0	2.02	82
2.5	1.68	119
2.0	1.35	185
1.5	1.01	330
1.0	0.67	742
0.5	0.34	2968
Cone Width (m)		

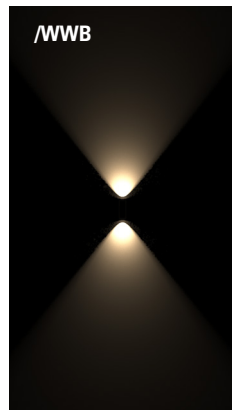

Extra Wide Beam

700mA using a 65° optic

Distance (m)	Luminance (lx)	
3.0	3.85	39
2.5	3.21	56
2.0	2.57	88
1.5	1.93	156
1.0	1.28	351
0.5	0.64	1402
Cone Width (m)		

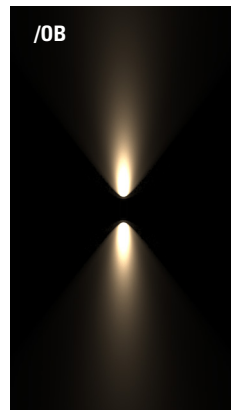

Oval Beam

700mA using a 18° X 45° optic

Distance (m)	Luminance (lx)	
3.0	2.47 / 0.91	149
2.5	2.06 / 0.76	214
2.0	1.65 / 0.60	335
1.5	1.24 / 0.45	595
1.0	0.82 / 0.30	1339
0.5	0.41 / 0.15	5357
Cone Width (m)		

ORDER CODES & OPTIONS

Example: LD10236-E3-500 / LW30 / NB / Silver Anodised

Light engine & drive current		LED colour		Beam angle		Finish
LD10236 -	/		/		/	

WHITE LED ENGINES

E3

5W LED at 350mA	LD10236-E3-350
7W LED at 500mA	LD10236-E3-500

Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

12° Narrow spot	/NB
19° Medium	/MB
34° Wide	/WB
54° Extra wide	/WWB
15° x 49° Oval	/OB



F1

3.5W LED at 350mA	LD10236-F1-350
5W LED at 500mA	LD10236-F1-500
7W LED at 700mA	LD10236-F1-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

25° Medium spot	/MSB
46° Wide	/WB
65° Extra wide	/WWB
18° x 45° Oval	/OB



COLOUR & DYNAMIC LED ENGINES

CLR

7W LED at 500mA	LD10236-CLR-500
-----------------	-----------------

Red	/LR
Green	/LG
Blue	/LB
Amber	/LA

24° Medium	/MB
38° Wide	/WB
54° Extra wide	/WWB
20° x 46° Oval	/OB



RGBW

10W LED at 350mA	LD10236-RGBW-350
14W LED at 500mA	LD10236-RGBW-500

38° Colour mix lens



TW

3.5W LED at 350mA	LD10236-TW-350
-------------------	----------------

Tunable White 2700K & 4000K (standard option)	/LW27 + LW40
Tunable White 2700K & 5000K	/LW27 + LW50
Custom	/LW** + L**

24° Medium	/MB
38° Wide	/WB
54° Extra wide	/WWB
20° x 46° Oval	/OB



Drivers
Use with 350mA, 500mA & 700mA constant current LED drivers We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.