

Design: Hoare Lea Lighting Project: Virgin Active Product: LD47

LD48

LOW GLARE INTERIOR/EXTERIOR
WALL OR STEP LIGHT

○ | 350 mA | 500 mA | 700 mA | IP67 | 55°C Ta | PART L General | PART L Display | 5 YEAR Warranty

CB | RLE | R+R | MOISTURE GUARD


The LD48 has been updated with the latest LED technology and fitted with our new optics. The lens assembly is recessed and inclined by 20° for a floor wash illumination with minimal glare. This is a high-quality fitting with a machined 316 stainless steel bezel and black anodized body, for interior and exterior use. It has no visible fixings and the glass is fixed with a hidden gasket, so no unsightly glue line is visible. A choice of beam angles and colour temperatures are available. See LD47 for a version with a square bezel.

KEY FEATURES

- LED and lens assembly recessed and tilted by 20° within a black anodised body for reduced glare
- High quality machined bezel and body
- Square and round versions available
- Glass fixed with hidden gasket, so no unsightly glue line
- No visible fixings. Options include spring fixing clips or O-rings and a first fix sleeve
- Can be used for external and internal applications
- Contains our integral moisture guard (anti-wicking barrier), stopping water ingress from going up the cable into the product from incorrect IP-rated connections
- Range of bezel finish options including stainless steel and paint finishes
- Available with Switch, 0-10V, DMX, Dali or Mains dimmable drivers

DIMENSIONS

For fixings and dimensions please go to page 4.

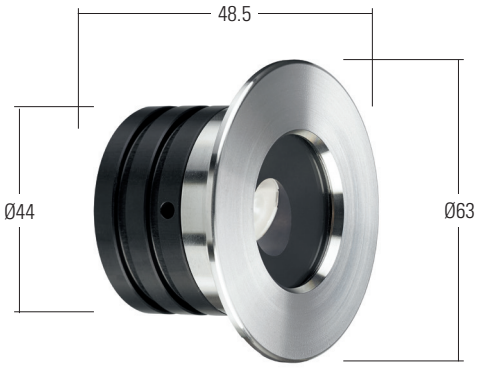

WHITE LED ENGINE SPECIFICATION

Engine	C1		
Beam angles	12°, 31°, 48°		
LED manufacturer	NICHIA		
Colour temperature	2200K, 2700K, 3000K, 4000K, 5000K		
Current [Rated output]	350mA [1.2W]	500mA [1.7]	700mA [2.4W]
Typical LED Circuit wattage	1.1W	1.6W	2.3W
Delivered lumens (L_{100})*	106	138	177
Delivered lm/Circuit W**	97	86	76
Typical LED Source wattage	1W	1.6W	2.1W
Source LED Lm	133	187	206
Source lm/W	136	129	98
Forward voltage (V_{100})	2.8V	2.9V	3V
CRI	93		
Colour consistency	2 SDCM		
Peak intensity	554 cd		
LOR	0.86		
TM30	RF92 | RG100		
BUG rating (Sideways mounted)	B0-U2-G1		
LED lifetime	L90B5 at 90,000hrs		
Applications			

This data is based on LD48-C1-700/922/MB
*Lumen output data applies to all colour temperatures
**LED wattage includes losses associated with using a 90% efficient driver

MECHANICAL

		350mA	500mA	700mA
Ambient temperature ○ 55°C	C1	-20°C to 55°C	-20°C to 55°C	-20°C to 55°C
	AUS/NZ	-20°C to 25°C		
Glass	5mm thick borosilicate			
Materials	Black anodised aluminium body, Machine finish 316 stainless steel bezel (other options available)			
IP rating	IP67			
Wiring	Comes pre-wired with 2 core 100mm lead, can be specified with up to 10m at extra cost			


ENVIRONMENTAL

TM65	Available on request
TM66	2.7
Repair + Refurbish	R+R This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.
RLE (REPLACEABLE LIGHT ENGINE)	RLE 1  Visit page 4 for replacement parts

AVAILABLE FINISHES


Please refer to our finishes guide for full details

MACHINED & PLATED FINISHES



316 STAINLESS STEEL
/SS

- Marine grade 316 Steel
- Standard machined finish
- Extremely durable with very high corrosion resistance
- Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation
- Interior & exterior use



POLISHED & PASSIVATED 316 STAINLESS STEEL
/PPSS

- Marine Grade 316 Steel
- Mirror like finish
- Extremely durable with very high corrosion resistance
- Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments
- Interior & exterior use



FLAMED SOLID BRONZE
/FBZ

- Solid Bronze
- Hand finished Flamed Bronze unique to LightGraphix
- Extremely durable with very high corrosion resistance.
- Please note a natural dark patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location.
- Interior & exterior use

POWDER COAT PAINT FINISHES

Our paint finishes are suitable for interior, exterior, and high-saline environments. All our painted finishes are applied in-house, allowing us to maintain complete control over quality and consistency. This also means we can easily accommodate any RAL colour specification in addition to our standard colour range, offering you full flexibility for custom projects.




MATT BLACK
/PCBLK




MATT WHITE
/PCWHT



ANTIQUE WHITE
/PCAWHT



MATT SILVER
/PCMS



ANTHRACITE GREY
/PCANTGREY



GUNMETAL GREY
/PCGMG



ANTIQUE BRONZE
/PCANTBRZ



EARTH BRONZE
/PCEBRZ



DESERT BRONZE
/PCDBRZ



TEXTURED MARS BRONZE
/PCMARS



TEXTURED FIR GREEN
/PCTFG



WHITE STONE
/PCTWS




CUSTOM RAL
/CUSTFINISH

DIMENSIONS & FIXING OPTIONS


Dimensions in mm

/SC Spring clip fixing
Useful for most wall mounted applications

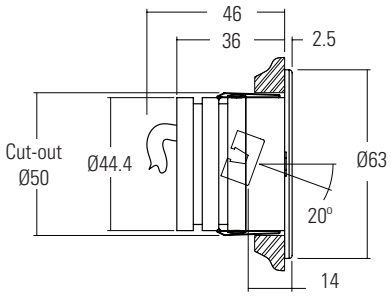



/476 O-rings and sleeve
A more robust and water tight method of fixing, for wet areas

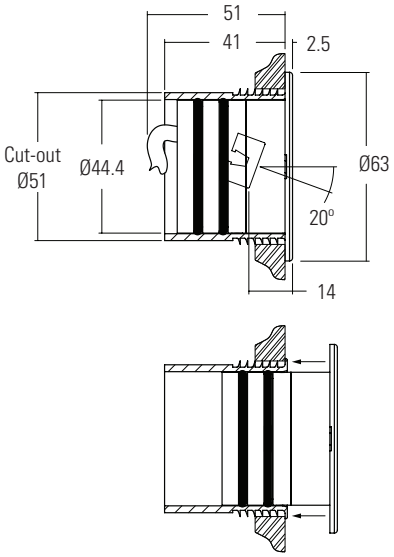



RLE - REPLACEABLE LIGHT ENGINES

What is RLE

On the surface, RLE is LightGraphix's answer to the Circular economy question that is facing many industries at the moment. However for us, RLE is an ethos; a commitment that LightGraphix will factor in the principles of good circular design into all of its future product design. It allows us to offer luminaires that contain replaceable, energy-efficient light engines. This gives customers the ability to refurbish existing lighting installations rather have having to replace the entire luminaire. This will fall into two types of refurbishments: replaceable, and repairable.




RLE Engines

Repairs can be conducted on any site worldwide, or in our factory, with a small tool. Simply swap out the singular modular LED insert, and replace it with another, along with a new optic, which are both supplied by us. The warranty provided with the product with vary based on who is performing RLE repairs. There are three types of RLE engine, categorised based on the size of the product. RLE1 is the smallest, with RLE3 being the largest.

LD48 RLE REPLACEMENT PARTS

Please use the configurator below to specify your replacement engine and optic. If you are unsure of your original specifications, please check the label on your LightGraphix fitting, or get in touch with our sales team. Installation sheets will be supplied with the new components.

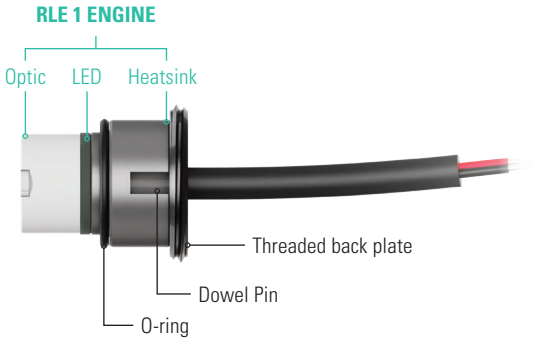

RLE Engine		LED Colour		Beam Angle		Accessories	
RLE1/							
RLE 1 ENGINE	RLE1/	2200K 93+ CRI	/922	Narrow beam 16mm optic	RLE/OP-16/NB	Dowel pin for Oval beam orientation	RLE1/OP-16/DP
		2700K 93+ CRI	/927	Medium beam 16mm optic	RLE/OP-16/MB	O-ring	RLE/OR1
		3000K 93+ CRI	/930	Wide beam 16mm optic	RLE/OP-16/WB	Threaded back plate	RLE/TBP
		4000K 93+ CRI on request	/940	Oval beam 16mm optic	RLE/OP-16/OB		
		5000K 93+ CRI	/950				

ORDER CODES & OPTIONS

Example: LD48-C1-500/930/MB/Polished & Passivated 316 Stainless Steel/476

Light Engine & Drive Current / LED Colour / Beam Angle / Finish / Fixing

Ambient temperature key: 55°C

C1

1.2W LED at 350mA	LD48-C1-350
1.7W LED at 500mA	LD48-C1-500
2.4W LED at 700mA	LD48-C1-700

***AUS/NZ:**
Add - AU - suffix to the product code e.g. LD48-AU-C1-350

2200K 93+ CRI	/922
2700K 93+ CRI	/927
3000K 93+ CRI	/930
4000K 93+ CRI on request	/940
5000K 93+ CRI	/950
Red	/LR
Green	/LG
Blue	/LB
Amber	/LA

12° Narrow	/NB
31° Medium	/MB
48° Wide	/WB
12° x 36° Oval	/OB

Machine Finish

- 316 Stainless Steel
- Polished & Passivated Stainless Steel
- Flamed Bronze

Powder Coat

- Matt Black
- Matt White
- Antique White
- Matt Silver
- Anthracite Grey
- Gun Metal Grey
- Antique Bronze
- Earth Bronze
- Desert Bronze
- Textured Mars Bronze
- Textured Fir Green
- White Stone
- Any RAL



/SC

/476

Drivers
Use with 350mA, 500mA & 700mA constant current LED drivers We have a wide range of LED drivers available. Please see the downloads section of our website.