

LD22

High power 24V Linear LED cove light



Data sheet - Page 1



Design: Maurice Brill Lighting Project: 20 Fenchurch Street Product: LD22



LD22 is a very small, low profile linear system. Designed to maximise the light output with a broad beam, it is ideal for coves, shelf details, recesses and highlighting architectural details. It is a 24V DC system allowing long lengths to be powered from a single driver.

Design Tip: Our 900lm/m LGX9C board offers a more than adequate amount of light for a bright cove detail. At 12.5W/m it enables 12m to be run off one 150W driver.

Key Features

- Choice of LED outputs depending on the application including RGB
- Very low profile
- Clear cover is supplied as standard. A frosted diffuser can be specified, creating a softer light effect which can be useful in tight details
- A range of fixing options including a miniature adjustable bracket allows maximum flexibility
- IP40 as standard with an IP54 option for pool/spa coffers (not exterior applications)
- Lengths are custom made to suit to a maximum of 3000mm**, so no dark spots!
- Short pieces can be made interlinked to accommodate curves
- Non-fade Rosco filters can be used to achieve colour temperatures of 2200K
- Available with Switched, 1-10V, DMX or Dali drivers

Dimensions

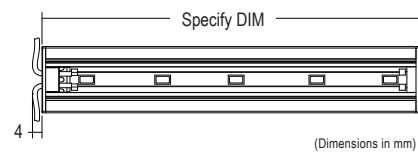

LD22



High power 24V Linear LED cover light


Data sheet - Page 2

LED output options	Eco 220 lm/m		LGX9C 900 lm/m		LG2000 2000 lm/m		RGB 435 lm/m	
Applications								
	<p>Highlighting architectural details, steps</p>		<p>Cove, shelf details, recesses</p>		<p>High power applications</p>		<p>Colour change</p>	
Description	Eco output tape		LightGraphix high output LED board		High output tape		RGB tape	
Colour Temperature	2700K / 3000K	4000K	2700K / 3000K	4000K / 5000K	2700K / 3000K	4000K / 5000K	-	
Delivered lumens / m	220lm/m	240lm/m	900lm/m	1000lm/m	2000lm/m	2000lm/m	435 lm/m	
Watts / m	3.6W/m		12.5W/m		15W/m		18W/m	
Lumens per watt	61lm/w		70lm/w		133lm/w		24.1 lm/w	
Voltage (V)	24V DC							
CRI	85						-	
LED	Osram Flex		LGX board with Osram Duris LEDs		Osram Flex			
LED cut increments	100mm		75mm		100mm		100mm	
LED spacing	20mm		25mm		14.3mm		25mm	
Min single length	113mm		75mm		114mm		114mm	
Max single length**	3000mm							
LED lifetime	50,000hrs (to 70% lumen output)							
Max ambient temperature	45°C							
Materials	Silver anodised aluminium extrusion with ABS plastic end caps. Stainless fixing clips. Anodised aluminium brackets.							
IP rating	IP40 as standard (IP54 option for pool/spa applications - not for exterior use)							


* Shipping and practicalities of installation need to be considered when specifying long lengths

Fixing Options


/SC - Spring clip fixing




/BEM - Bracket end mounting

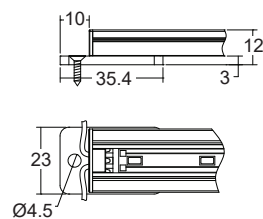

/BSM - Bracket side mounting



/ABM - Adjustable bracket mounting

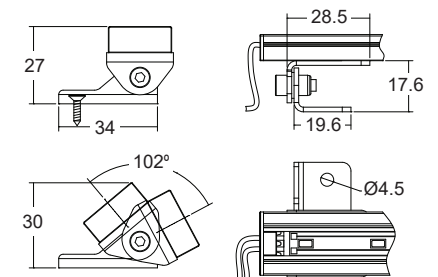

(Dimensions in mm)

LD22

High power 24V Linear LED cove light




Data sheet - Page 3



Project: Private Residence
Design: Spectron
Product: LD22

Linked sections

LD22 can be linked to allow for curves. The length of each module depends on the LED used and the radius of the curve.


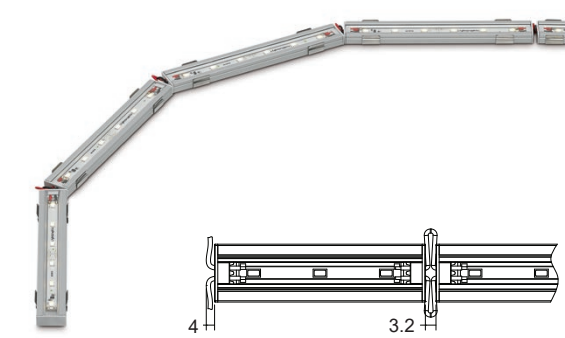


Cover options

Frosted cover diffuses the light source and softens the beam edges

/CC - Clear cover

/FC - Frosted cover

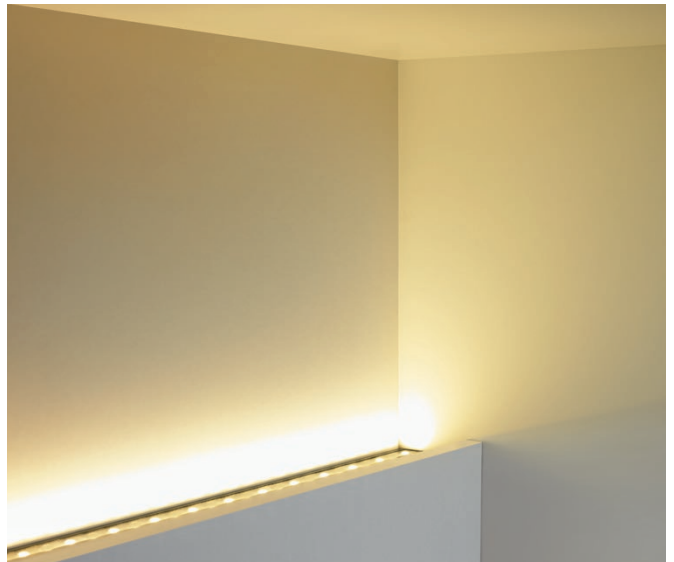

LD22

High power 24V Linear LED cove light



Data sheet - Page 4



Design: Light+ Design Project: Mandarin Oriental Product: LD22

Photometrics

Photometric files are included in the design pack which can be downloaded from the LD22 product page on the website.

Order Codes and Options

Product code	LED	LED colour	Cover	Fixing option	IP rating	Length
LD22	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Example: LD22 / LGX9C / LW30 / CC / SC / IP40 / 2000mm

LED output options		Suffix
Eco	220 lm/m	/Eco
LGX9C	900 lm/m	/LGX9C
LG2000	2000 lm/m	/LG2000
RGB	475 lm/m	/RGB
LED colour options		
Extra Warm White (2700K)		/LW27
Warm White (3000K)		/LW30
White (4000K Eco, LGX9C, LG2000)		/LW40
Cool White (5000K LGX9C, LG2000)		/LW50
Cover options		
Clear Cover		/CC
Frosted Cover		/FC
Fixing options		
Spring Clips		/SC
Bracket end mounting		/BEM
Bracket side mounting		/BSM
Adjustable bracket mounting		/ABM
IP options		
IP40 (internal use as standard)		/IP40
IP54 rated for moist environments (not for exterior use)		/IP54

To be used with 24V constant voltage LED Drivers and Controllers

We offer a range of drivers with 1-10V, DMX, and DALI dimming options. Please download the data sheet from the downloads section at www.lightgraphix.co.uk, or contact us for more information